

Order Example: BLE - C - WGGWS12 - 200 - CSW - 200 - NA - NA - FST - GU24 - NA

**A - MOUNTING STYLE**

- C** Cord Hung
- S** Stem Mount
- F** Flush Mount
- CN** Chain Hung

**B - SHADE SIZE**

- WGGWS12** 12" Blue Collar Shade
- WGGWS14** 14" Blue Collar Shade
- WGGWS16** 16" Blue Collar Shade

**C - FINISHES**

- POWDER COAT FINISHES:**
- 100** Black
  - 105** Textured Black
  - 200** White
  - 300** Dark Green
  - 307** Emerald Green
  - 311** Jadite
  - 370** Mint
  - 380** Chartreuse
  - 390** Teal
  - 400** Barn Red
  - 420** Orange
  - 470** Watermelon
  - 480** Blush Pink
  - 490** Magenta
  - 500** Buttery Yellow
  - 570** Sunflower
  - 600** Bronze
  - 601** Chocolate
  - 605** Rust
  - 615** Oil-Rubbed Bronze
  - 700** Royal Blue
  - 705** Navy
  - 710** Cobalt Blue
  - 715** Delphite Blue
  - 800** Industrial Grey
  - 805** Charcoal Granite
  - 810** Graphite
  - 975** Galvanized

**D - MOUNTING**

- CSA LISTED CORD OPTIONS:**
- SBK** Standard Black
  - SWH** Standard White
  - CSB** Black Cloth
  - CSW** White Cloth
  - CSR** Red Cloth
  - CSBW** Black & White Cloth
  - CSRW** Red & White Cloth
  - CSBG** Black & Gold Cloth
  - CSBP** Black & Pink Cloth
  - CSGW** Gold & White Cloth
  - CSUW** Blue & White Cloth
  - CSBB** Black & Brown Cloth

**NON-CSA LISTED CORD OPTIONS:**

- CBK** Black Cotton
- CRZ** Red Chevron
- CMG** Grey Cotton

**STEM MOUNT OPTIONS:**

- ST506** .5" Stem Mount, 6"
- ST512** .5" Stem Mount, 12"
- ST518** .5" Stem Mount, 18"
- ST524** .5" Stem Mount, 24"
- ST536** .5" Stem Mount, 36"
- ST548** .5" Stem Mount, 48"
- ST706** .75" Stem Mount, 6"
- ST712** .75" Stem Mount, 12"
- ST718** .75" Stem Mount, 18"
- ST724** .75" Stem Mount, 24"
- ST736** .75" Stem Mount, 36"
- ST748** .75" Stem Mount, 48"

**FLUSH MOUNT OPTIONS:**

- FM**

**CHAIN MOUNT OPTIONS:**

- CN36** 3' of Chain
- CN48** 4' of Chain
- CN60** 5' of Chain
- CN72** 6' of Chain

**E - MOUNTING FINISH**

*Please Note: See Section C for all applicable Mounting Finish Options. Additionally, 980-Brushed Aluminum is available.*

*(I) If Cord Hung [C] Mounting Style, selection identifies canopy finish*

*(II) If Stem Mount [S] Mounting Style, selection identifies stem and canopy finish*

*(III) If Flush Mount [F] Mounting Style, selection identifies canopy finish*

*(IV) If Chain Hung [CN] Mounting Style, selection identifies chain and canopy finish*

- 980** Brushed Aluminum

**F - CORDS<sup>1</sup>**

- NA** Not Applicable
- CSA LISTED CORD OPTIONS:**
- SBK**                      **CSRW**
  - SWH**                      **CSBG**
  - CSB**                      **CSBP**
  - CSW**                      **CSGW**
  - CSR**                      **CSUW**
  - CSBW**                      **CSBB**

**NON-CSA LISTED CORD OPTIONS:**

- CBK**
- CRZ**
- CMG**

**G - MOUNTING ACCESSORY**

- NA** Not Applicable
- HSC** Hang Straight Canopy<sup>2</sup>
- HDSMC** Heavy Duty Stem Mount Canopy<sup>2</sup>

**H - GLASS OPTIONS**

- CLR** Clear Glass<sup>3</sup>
- FST** Frosted Glass
- RIB** Ribbed Glass
- CCR** Clear Crackle Glass
- SMK** Smoke Crackle Glass
- HCR** Honey Crackle Glass

**I - LIGHT SOURCE**

- E26** 100 Watt Max
- GU24** 24 Bi-Pin, 18W Max<sup>4</sup>
- LED16.8** 16W LED, 1600 LM


**J - COLOR TEMPERATURE<sup>5</sup>**

- NA** Not Applicable
- 2700K** 2700K, Warm White
- 3000K** 3000K, Neutral White
- 3500K** 3500K, Bright White
- 4000K** 4000K, Cool White


**IMPORTANT:** (1) Only applicable if Chain Hung Option is selected in Section A and D, select NA if another Mounting Style is selected (2) Only applicable with Stem Mount Model (3) Clear Glass not recommended if LED16.8 Light Source Selected in Section I (4) Fixtures configured with a GU24 socket are non-returnable (5) Only applicable if LED16.8 Light Source is selected in Section I, select NA if another Light Source is selected

**MOUNTING STYLE**


**CORD HUNG PENDANT (C)**

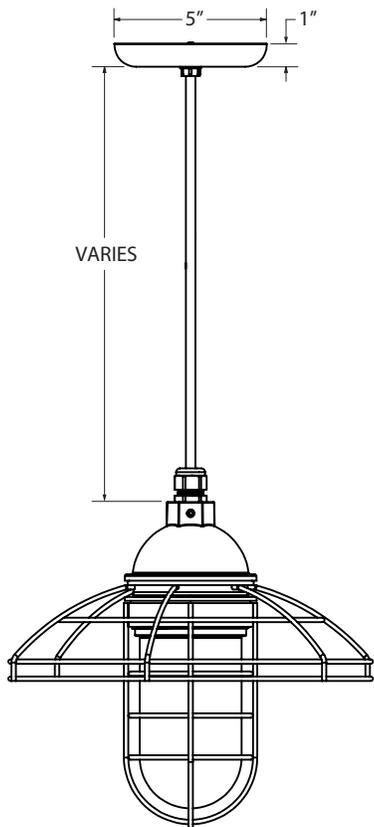


**CHAIN HUNG PENDANT (CN)**

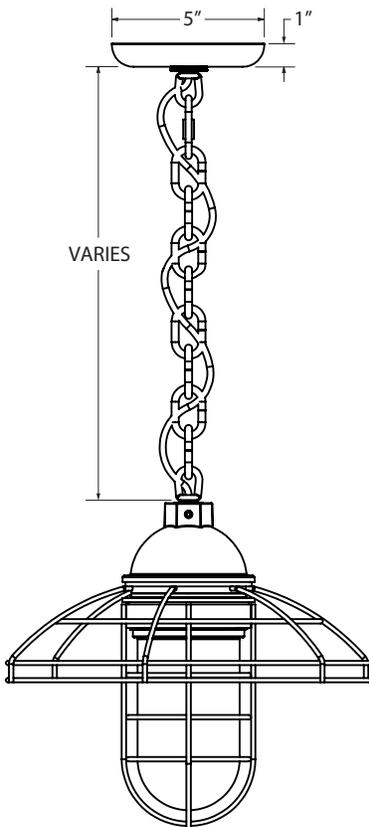


**STEM MOUNT PENDANT (S)**

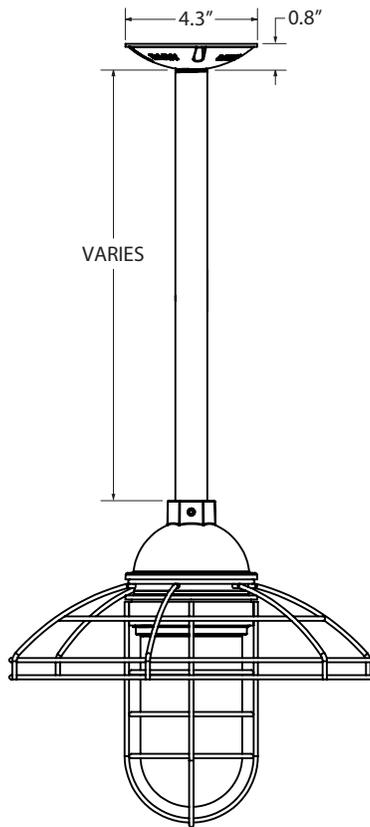

**FLUSH MOUNT PENDANT (F)**

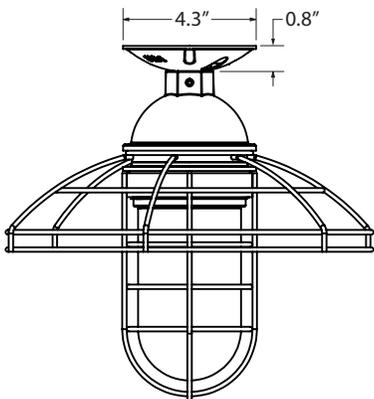

**AVAILABLE SHADE SIZES**

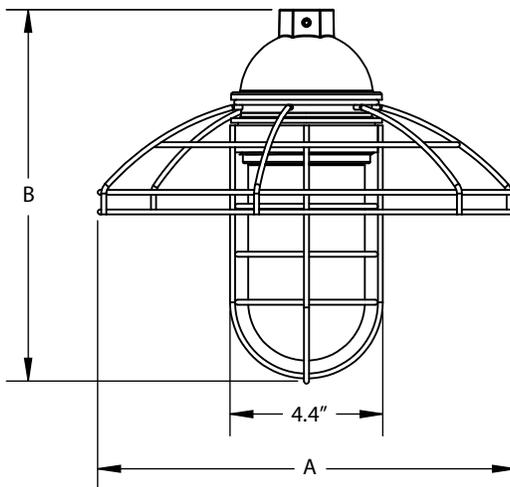

SHADE CODE	DIAMETER (A)	HEIGHT (B)
WGGWS12	12"	10.6"
WGGWS14	14.2"	10.6"
WGGWS16	16.2"	10.6"

**LIGHT SOURCE**

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact the factory.

OPTION	WATTAGE	LUMENS <small>*Avg. value, actual value dependent on bulb used</small>	CRI	VOLTAGE	DIMMING
<b>INCANDESCENT (MED E26)</b>					
<b>E26</b>	100W Max	1400*	100	120 VAC	Bulb Dependant
<b>COMPACT FLOURESCENT (GU24 CFL)</b>					
<b>GU24</b>	18W Max	1400*	75	120 VAC	Bulb Dependant
<b>LED</b>					
<b>LED16.8</b>	16W	1600	>90	120 VAC	TRIAC

**SPECIFICATIONS**

**MOUNTING**

STEM  
1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Mounting Stem. Custom Lengths Available upon Request.

CORD  
Cord-hung Pendants Include 7' Of Standard Cord Or 5' Of Cotton Cord, +/- For Socket Orientation

**SHADE & FINISHES**

BLUE COLLAR SHADE  
Hand-Spun from High Purity 0.050" Thick 3003-O Temper Aluminum

POWDER COAT FINISHES  
Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured

**LED SPECIFICATIONS**

LUMEN MAINTENANCE  
LED16.8 Source is L90(11K) > 61,000 Hours.

COLOR TEMPERATURES  
Standard Color Temperatures Available Include 2700K, 3000K, 3500K and 4000K. Custom Temperatures Available upon Request.

CRI  
Minimum 90 CRI. Consult Factory for Other CRI Options.

EFFICACY  
Up to 100 LPW Based on Wattage/Lumens in the Table

DRIVER & DIMMING OPTION  
Relient on Triac Dimming 12w / 120v, up to 5% Dimming. Requires Compatible Dimming Switch.

**CERTIFICATIONS, LISTINGS & WARRANTY**

MADE IN THE USA  
Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS  
Includes All Stem Mounting Styles

CSA LISTED FOR DAMP LOCATIONS  
Includes All Chain and Select Cord Hung Mounting Styles

LIMITED WARRANTY  
For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions