REV 08.03.18
INDUSTRIAL TANKER WAREHOUSE PENDANT


BARN LIGHT PENDANT FAMILY Max Weight: 10.0 lbs PROJECT NAME

PROJECT TYPE _____

SPS-0073

	A	В			
Order Examp	le: BLE - WH12 - GV - FLEX24 - HS0	- E26			
A - FLEX	TUBE		B - LIGI	HT SOURCE	
FLEX12	12" Flex Tube		E26	200 Watt Max	
FLEX18	18" Flex Tube		GU24	24 Bi-Pin, 23 Watt Max	
FLEX24	24″ Flex Tube				
FLEX30	30″ Flex Tube				
FLEX36	36" Flex Tube				
FLEX42	42" Flex Tube				
FLEX48	48″ Flex Tube				

DIMENSIONAL DRAWING

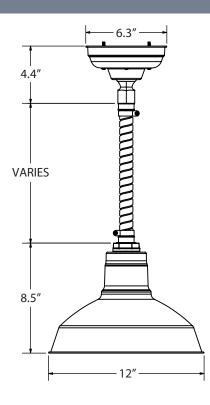

LIGHT SOURCE

All published luminaire photometric testing is performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact our manufacturing facility or a sales representative.

OPTION	WATTAGE	LUMENS *Avg. value, actual value dependent on bulb used	CRI	VOLTAGE	DIMMING			
INCANDESCENT (MED E26)								
E26	200W Max	3000*	100*	120 VAC	Bulb Dependant			
COMPACT FLOURESCENT (GU24 CFL)								
GU24	23W Max	1600*	75*	120 VAC	Bulb Dependant			

BARN LIGHT U.S.A

SPECIFICATIONS			
MOUNTING	CERTIFICATIONS, LISTINGS & WARRANTY		
FLEX TUBE Galvanized Flex Tube, Custom Lengths Available upon Request HANG STRAIGHT CANOPY Includes a Ball and Socket That Allows Installation on Pitched and Sloped Ceilings	MADE IN THE USA Manufactured and Hand-Crafted in Our 60,000 Square Foot Facilit Located in Titusville, FL DAMP LOCATION RATED NON ULLISTED		
LIGHT SOURCE INCANDESCENT SOCKET Standard Incandescent Porcelain Socket, 200W Max CFL SOCKET GU24 Bi-Pin CFL Socket, 23W Max	LIMITED WARRANTY For Additional Information on our Limited Warranty, Please See ou Terms & Conditions		