



INSTALLATION INSTRUCTIONS
STEM MOUNT PENDANT

Thank you for purchasing from Barn Light Electric, America's leading manufacturer of hand-crafted shades and exclusive source for porcelain enamel lighting! For questions or concerns about your purchase, please contact us!

INS-0002 REV V (HWK-0002)

IMPORTANT

Read all instructions before assembly. Installation is to be done by a qualified professional. **For wet locations, junction between the mounting surface and luminaire must be sealed with caulking.**


CAUTION: Risk of fire, this product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

INSTRUCTIONS


1. Disconnect power at the electrical panel before installation.
2. If adapter bracket (A) is necessary, mount to junction box (B) using two mounting screws (C). **NOTE: Mounting screws (C) not included.**
3. Place socket gasket (D) onto socket (E). Feed socket wires through shade (F), coupler o-ring (G) and coupler (H).
4. Insert socket (E) into the shade (F) and screw on coupler (H), rotate coupler counter-clockwise. **NOTE: Ensure o-ring (G) is seated in coupler (H) groove.**
5. Feed wires from shade (F) through stem (I), canopy (J) and gasket (K).
6. Thread stem (I) into shade (F) and tighten. **NOTE: Use pipe joint compound or teflon tape to seal connection.**
7. Thread stem (I) into canopy (J) and secure in place with set screw (L).
8. Use wire nuts (M) to connect power supply to the black wire and neutral wire to the white wire. **NOTE: Wire nuts (M) not included.**
9. Attach ground wire (N) to the junction box (B), green wire, or bare wire.
10. Secure canopy (J) to the adapter bracket (A) or directly to the junction box (B) with two mounting screws (O). Tighten until flush against the ceiling/wall.

ALTERNATE FIXTURES

Although the illustration below includes an RLM shade, these alternative fixtures follow the same installation instructions.




Schoolhouse Fixture




Guard & Glass Fixture

WIRING DIAGRAM

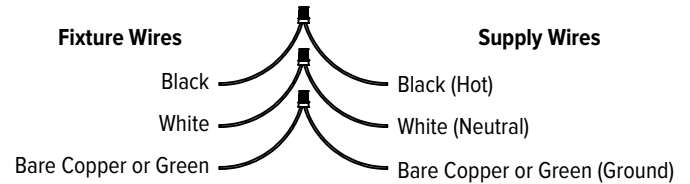

STEM MOUNT PENDANT

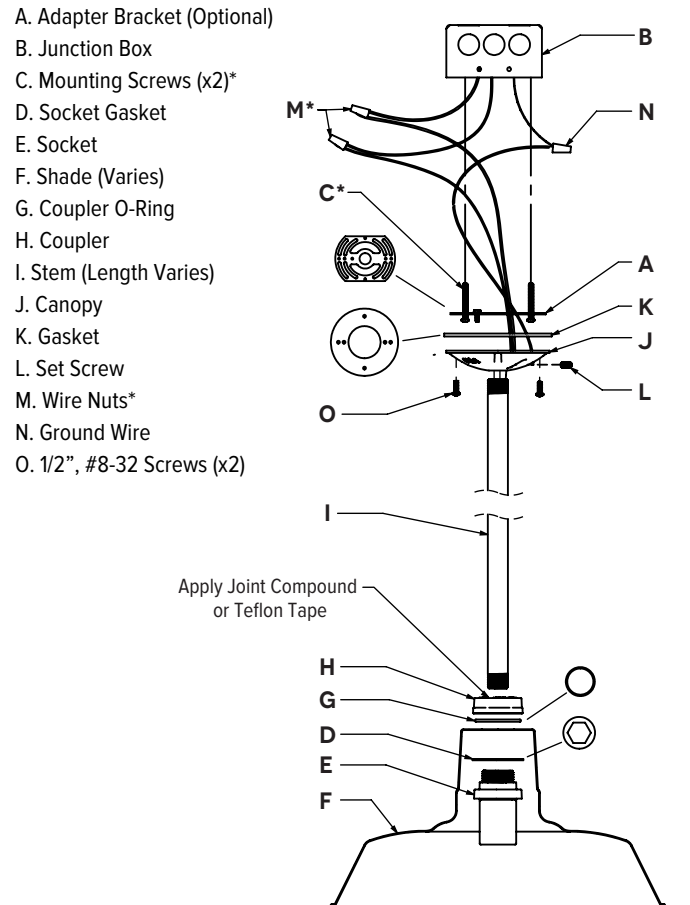

***IMPORTANT:** Mounting screws and wire nuts not included in hardware kit. Standard screw sizes include: 6-32, 8-32, 10-24 and 10-32.