

JOB NAME: \_\_\_\_\_ FIXTURE TYPE: \_\_\_\_\_

BLE - S - QS -      -      -      -      -

**A                  B                  C                  D                  E**

Order Example: BLE - S - QS - DBW12 - 200 - ST706 - HSC - NA

## A - SHADE SIZE

*WILCOX:*

<b>DBW12</b>	12" Shade
<b>DBW16</b>	16" Shade

### B - SHADE FINISH

**POWDER COAT FINISHES<sup>1</sup>:**

<b>100</b>	Black
<b>200</b>	White
<b>600</b>	Bronze
<b>975</b>	Galvanized

## C - MOUNTING OPTIONS

STEM MOUNT OPTIONS:

**ST706** .75" Stem Mount, 6"  
**ST712** .75" Stem Mount, 12"  
**ST718** .75" Stem Mount, 18"  
**ST724** .75" Stem Mount, 24"

## D - CANOPY


<b>SC</b>	Standard Canopy
<b>HSC</b>	Hang Straight Canopy

## E - SHADE ACCESSORY

<b>NA</b>	None/No Wire Cage
<b>WC</b>	Wire Cage <sup>2</sup>

**IMPORTANT:** (1) All Powder Coat finished shades, Galvanized excluded, feature a white interior (2) If selected, shade accessory finish will match selection in Section B

## MOUNTING DIMENSIONS

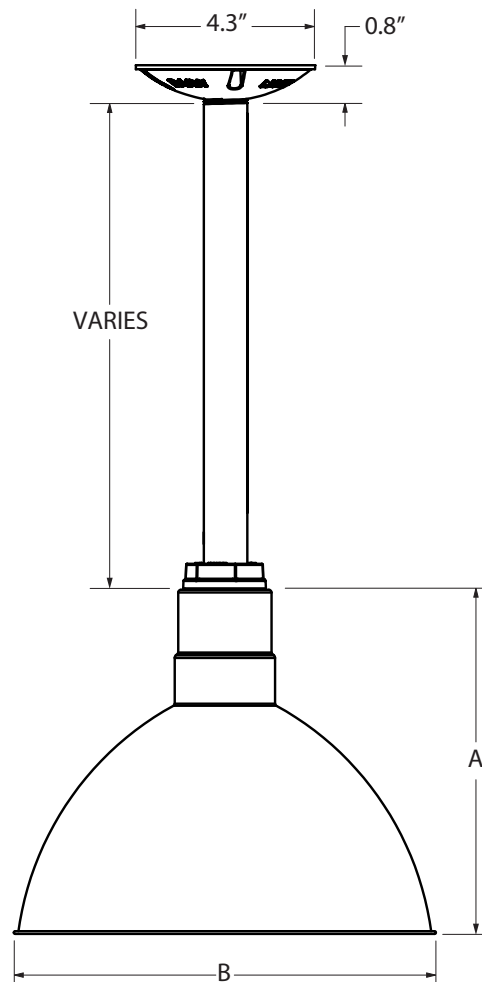

SHADE CODE	HEIGHT (A)	DIAMETER (B)
DBW12	9.75"	12"
DBW16	12.75"	16"

SPECIFICATIONS

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA  
Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility  
Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS

LIMITED WARRANTY  
For Additional Information on Our Limited Warranty, Please See  
Our Terms & Conditions

LIGHT SOURCE

INCANDESCENT  
Medium Base E26 Socket, 120 VAC, 200W Max

CONSTRUCTION & FINISH

POWDER COAT SHADE  
Hand-Spun from High Purity 3003-O Temper Aluminum

GALVANIZED SHADE  
Hand Spun from High Quality Galvanized Steel

POWDER COAT FINISHES  
Polyester Powder Coat Finishes Are Electro-Statically Applied and  
Thermocured

STEM  
3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Mounting  
Stem. Custom Lengths Available upon Request.