

BLE - G - - - -

A B C D

Order Example: BLE - G - LCS16 - 300 - G16 - NA

ALL WEATHER¹:

POWDER COAT FINISHES²:


GOOSENECK OPTIONS:

NA	None
DD	Dusk-to-Dawn Photocell

IMPORTANT: (1) There are no returns accepted on this product (2) All Powder Coat finished shades, with the exception of 975-Galvanized, feature a white interior

Technical drawing of a pendant light fixture. The drawing shows a side view of the fixture. The arm length is 11.2". The arm diameter is 4.7". The mounting height is 1.9". The shade is a wide, shallow bowl shape. The dimensions A and B are indicated for the shade's width and height, respectively.

SHOWN WITH: G16 GOOSENECK ARM

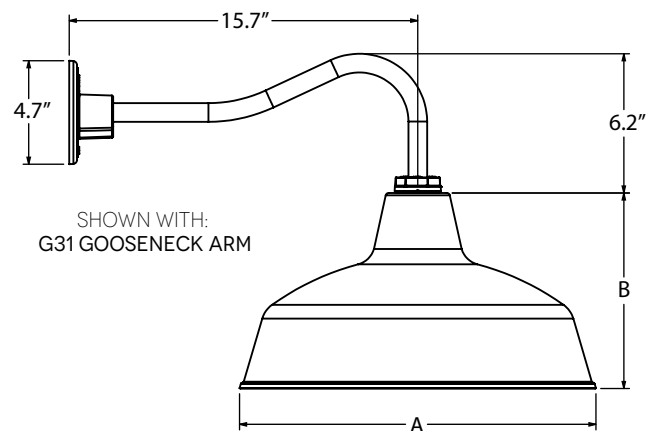

A diagram of a truncated cone. The base is a circle with diameter labeled 'A'. The height is labeled 'B'. The top surface is a smaller circle. The side profile is a trapezoid.

SHADE CODE	DIAMETER (A)	HEIGHT (B)
LCS12	12"	7.1"
LCS14	14"	8.1"
LCS16	16"	8.8"

MOUNTING & DESIGN

GOOSENECK

1/2" Nominal (0.84" Actual) Sch 40, 6063 Aluminum Gooseneck

SHADF

Hand-Spun from High Purity 0.050" Thick 3003-O Temper Aluminum

POWDER COAT FINISHES

Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured

MAX FIXTURE WEIGHT

10 lbs

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA

Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility
Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS

LIMITED WARRANTY

For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions

LIGHT SOURCE

INCANDESCENT

Medium Base E26 Socket, 200 Watt Max, 120 VAC