




SPS-0158 REV G

**WILCOX SERIES**

JOB NAME: \_\_\_\_\_ FIXTURE TYPE: \_\_\_\_\_



BLE - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_

A B C D E F G

H I J K L

Order Example: BLE - C - DBW16 - 995 - CSBG - NA - 995 - NA - WC - 100 - NA - NA - E26

**A - MOUNTING STYLE**

<b>C</b>	Cord Hung
<b>CN</b>	Chain Hung
<b>F</b>	Flush Mount <sup>1</sup>
<b>G</b>	Gooseneck
<b>S</b>	Stem Mount

**B - SHADE SIZE****WILCOX:**

<b>DBW8</b>	8" Shade <sup>1,2</sup>
<b>DBW10</b>	10" Shade <sup>2</sup>
<b>DBW12</b>	12" Shade
<b>DBW14</b>	14" Shade
<b>DBW16</b>	16" Shade <sup>3</sup>
<b>DBW20</b>	20" Shade <sup>4</sup>

**C - SHADE FINISH****PORCELAIN FINISHES<sup>5</sup>:**

<b>150</b>	Black
<b>250</b>	White
<b>350</b>	Vintage Green
<b>355</b>	Jadite
<b>455</b>	Cherry Red
<b>550</b>	Yellow
<b>650</b>	Bronze
<b>750</b>	Cobalt Blue
<b>765</b>	Delphite Blue
<b>850</b>	Graphite
<b>950</b>	Metallic Chrome

**POWDER COAT FINISHES<sup>6</sup>:**

<b>100</b>	Black
<b>105</b>	Textured Black
<b>106</b>	Matte Black
<b>200</b>	White
<b>206</b>	Matt White
<b>300</b>	Dark Green
<b>307</b>	Emerald Green
<b>370</b>	Mint
<b>380</b>	Chartreuse
<b>390</b>	Teal
<b>400</b>	Barn Red
<b>420</b>	Orange
<b>470</b>	Watermelon
<b>480</b>	Blush Pink
<b>490</b>	Magenta
<b>495</b>	Sherbet Orange
<b>500</b>	Buttery Yellow
<b>570</b>	Sunflower
<b>600</b>	Bronze
<b>601</b>	Chocolate
<b>605</b>	Rust

**C - SHADE FINISH (CONTINUED)****POWDER COAT FINISHES<sup>6</sup>:**

<b>615</b>	Oil-Rubbed Bronze
<b>700</b>	Royal Blue
<b>705</b>	Navy
<b>790</b>	Lavender
<b>800</b>	Industrial Grey
<b>805</b>	Charcoal Granite
<b>975</b>	Galvanized

**NATURAL METALS<sup>7</sup>:**

<b>995</b>	Raw Copper
<b>996</b>	Weathered Copper
<b>997</b>	Raw Brass
<b>998</b>	Weathered Brass
<b>999</b>	Oil-Rubbed Copper

**D - MOUNTING**Please Note: If Flush Mount [F] is selected in **Section A**, please select **NA****NA** Not Applicable**CSA LISTED CORD OPTIONS:**

<b>SBK</b>	Standard Black
<b>SWH</b>	Standard White
<b>CMG</b>	Grey Cotton
<b>CRZ</b>	Red Chevron
<b>CSB</b>	Black Cloth
<b>CSW</b>	White Cloth
<b>CSR</b>	Red Cloth
<b>CSBB</b>	Black & Brown Cloth
<b>CSRW</b>	Red & White Cloth
<b>CSGW</b>	Gold & White Cloth
<b>CSBG</b>	Black & Gold Cloth
<b>CSBW</b>	Black & White Cloth
<b>CSBP</b>	Black & Pink Cloth
<b>CSUW</b>	Blue & White Cloth

**NON-CSA LISTED CORD OPTIONS<sup>8</sup>:**

<b>TBK</b>	Black Cotton Twist
<b>TWH</b>	White Cotton Twist
<b>TBR</b>	Brown Cotton Twist
<b>TRD</b>	Red Cotton Twist
<b>TPT</b>	Putty Cotton Twist
<b>TBW</b>	Black & White Twist
<b>TRW</b>	Red & White Twist
<b>TBB</b>	Brown & Beige Twist

**D - MOUNTING (CONTINUED)****CHAIN MOUNT OPTIONS<sup>4</sup>:**

<b>CN36</b>	3' of Chain
<b>CN48</b>	4' of Chain
<b>CN60</b>	5' of Chain
<b>CN72</b>	6' of Chain

**GOOSENECK OPTIONS:**

<b>G1<sup>4</sup></b>	<b>G9</b>	<b>G17</b>	<b>G35<sup>4</sup></b>
<b>G2<sup>4</sup></b>	<b>G10</b>	<b>G19<sup>4</sup></b>	<b>G36<sup>4</sup></b>
<b>G3<sup>4,9</sup></b>	<b>G11<sup>4</sup></b>	<b>G22</b>	<b>G40<sup>4</sup></b>
<b>G4<sup>9</sup></b>	<b>G12<sup>4</sup></b>	<b>G24</b>	<b>G64<sup>4</sup></b>
<b>G5<sup>4</sup></b>	<b>G13</b>	<b>G25</b>	<b>G65<sup>4</sup></b>
<b>G6</b>	<b>G14</b>	<b>G26<sup>4</sup></b>	
<b>G7</b>	<b>G15</b>	<b>G32</b>	
<b>G8</b>	<b>G16<sup>4</sup></b>	<b>G34<sup>4</sup></b>	

**STEM MOUNT OPTIONS:**

<b>ST506</b>	.5" Stem Mount, 6" <sup>4</sup>
<b>ST512</b>	.5" Stem Mount, 12" <sup>4</sup>
<b>ST518</b>	.5" Stem Mount, 18" <sup>4</sup>
<b>ST524</b>	.5" Stem Mount, 24" <sup>4</sup>
<b>ST536</b>	.5" Stem Mount, 36" <sup>4</sup>
<b>ST548</b>	.5" Stem Mount, 48" <sup>4</sup>
<b>ST706</b>	.75" Stem Mount, 6"
<b>ST712</b>	.75" Stem Mount, 12"
<b>ST718</b>	.75" Stem Mount, 18"
<b>ST724</b>	.75" Stem Mount, 24"
<b>ST736</b>	.75" Stem Mount, 36"
<b>ST748</b>	.75" Stem Mount, 48"

**E - CORD LENGTH<sup>10</sup>**Please Note: If GU24 is selected in **Section L**, max Cord Length is 12FT

<b>NA</b>	Not Applicable
<b>7FT</b>	7' of Cord
<b>12FT</b>	12' of Cord
<b>20FT</b>	20' of Cord

**F - MOUNTING FINISH**Please Note: See **Section C** for Finish Options. 980-Brushed Aluminum is also available for Gooseneck (except G36, G40, G64 & G65) and Stem mounting styles. If Porcelain Finish is selected, mounting will be powder coat painted-to-match.(I) If Cord Hung [C] or Flush Mount [F]<sup>1</sup> Mounting Style, selection identifies canopy finish(II) If Chain Hung [CN]<sup>4</sup> Mounting Style, selection identifies chain and canopy finish**F - MOUNTING FINISH (CONT'D.)**

(III) If Stem Mount [S] Mounting Style, selection identifies stem and canopy finish

**980** Brushed Aluminum**G - CORDS<sup>11</sup>**Please Note: See **Section D** for all applicable CSA Listed Cord Options for Chain Hung Mounting Style**NA** Not Applicable**H - SHADE ACCESSORIES<sup>4</sup>**

<b>NA</b>	None
<b>WC</b>	Wire Cage <sup>2</sup>
<b>ACR</b>	Acrylic Diffuser <sup>2,12,13</sup>
<b>TGG</b>	Heavy Duty Guard
<b>CGG</b>	Cast Guard
<b>WGG</b>	Wire Guard

**I - SHADE ACCESSORY FINISH**Please Note: See **Section C** for Finish Options. Natural Metals not applicable. If Porcelain Finish is selected, accessory will be powder coat painted-to-match**NA** Not Applicable**J - GLASS OPTION<sup>14</sup>**

<b>NA</b>	Not Applicable
<b>CLR</b>	Clear Glass
<b>FST</b>	Frosted Glass
<b>RIB</b>	Ribbed Glass

**K - MOUNTING ACCESSORY**

<b>NA</b>	None/Not Applicable
<b>HSC</b>	Hang Straight Canopy <sup>4,15</sup>
<b>HDSMC</b>	Heavy Duty Stem Mount Canopy <sup>4,15</sup>
<b>HDBP</b>	Heavy Duty Backing Plate <sup>4,16,17</sup>
<b>DD</b>	Dusk-to-Dawn Photocell <sup>16,17</sup>
<b>DBPC</b>	Decorative Backing Plate Cover <sup>16,17</sup>
<b>DCHX</b>	Decorative Backing Plate Cover & Hex Cover <sup>16,17</sup>


**L - LIGHT SOURCE**

<b>E26</b>	200 Watt Max
<b>GU24</b>	23 Watt Max <sup>1,18</sup>


**IMPORTANT:** (1) Not available with Acrylic Diffuser accessory (2) Not available with the Guard & Glass accessory (3) Not available in Brass (4) Not available in Natural Metals (5) All Porcelain Enamel finished shades feature a white interior and a black outer rim (6) All Powder Coat finished shades, Galvanized excluded, feature a white interior (7) Natural Metals have a longer estimated manufacturing time, please check the website for exact lead time. There are no returns accepted on Natural Metals (8) Not available with Chain Hung [CN] option (9) Not compatible with 16" shade size or larger (10) Only applicable if Cord Hung Mounting Style is selected in Section A, select NA if another Mounting Style is selected in Section A (11) Only applicable if Chain Hung Mounting Style selected in Section A, select NA if another Mounting Style is selected (12) Acrylic Diffuser accessory reduces incandescent wattage to 60W (13) Fixture is UL Listed for Damp Locations with Acrylic Diffuser (14) Guard and Glass accessory reduces incandescent wattage to 100W Max and GU24 Bi-Pin to 18W Max (15) Only applicable if Stem Mounting Style is selected in Section A (16) Only available if Gooseneck Mounting Style is selected in Section A (17) Not available with G19 and G40 Gooseneck (18) Fixtures configured with GU24 socket are non-returnable

**MOUNTING STYLES**


**CHAIN HUNG PENDANT (CN)**

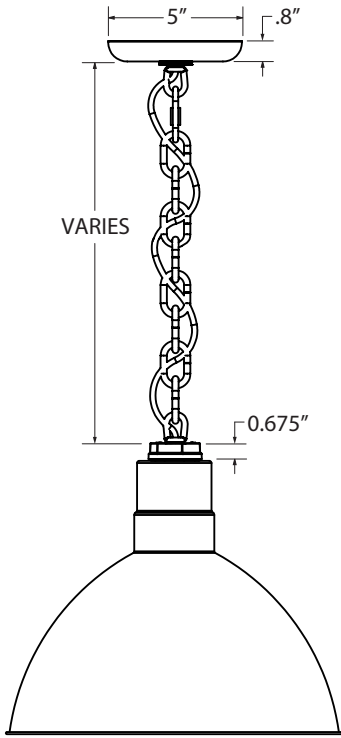


**FLUSH MOUNT (F)**

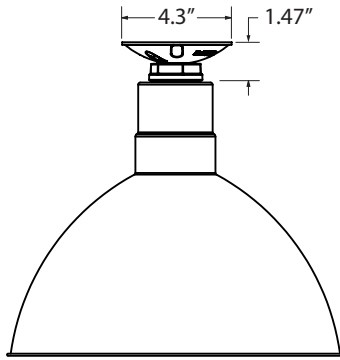


**STEM MOUNT PENDANT (S)**

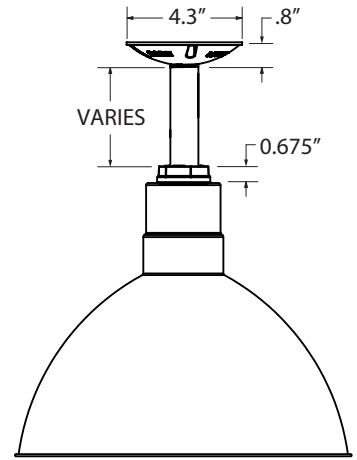


**CORD HUNG PENDANT (C)**

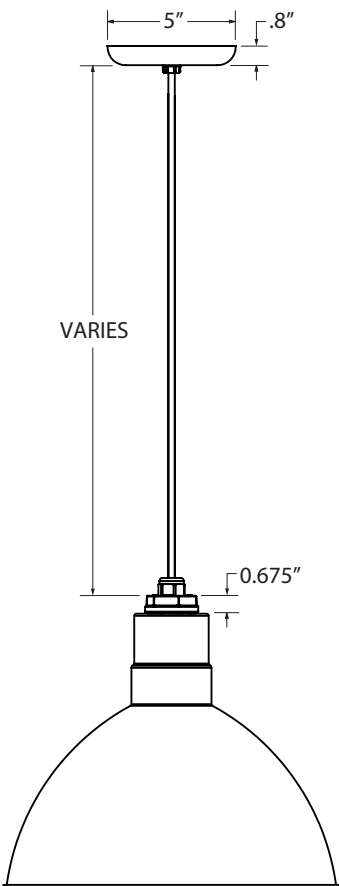

**GOOSENECK (G)**

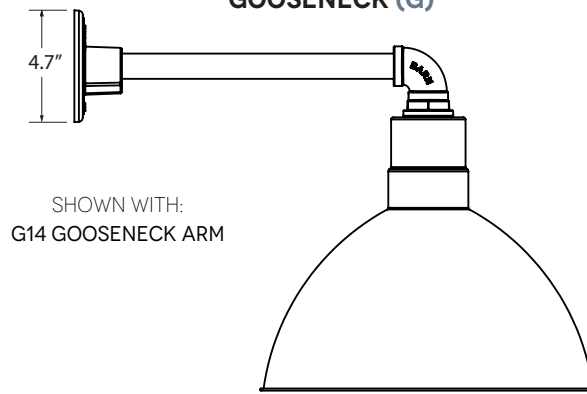

**LUMINAIRE DIMENSIONS**

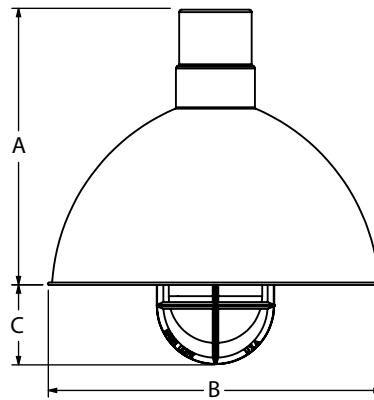

SHOWN WITH: OPTIONAL GUARD & GLASS ACCESSORY

SHADE CODE	HEIGHT (A)	DIAMETER (B)	EXTENSION (C)
DBW8	8.25"	8"	4.3"
DBW10	9"	10"	3.6"
DBW12	9.75"	12"	2.8"
DBW14	11.25"	14"	1.3"
DBW16	12.75"	16"	N/A
DBW20	16.25"	20"	N/A

**SPECIFICATIONS****CERTIFICATIONS, LISTINGS & WARRANTY**

## MADE IN THE USA

Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

## CSA LISTED FOR WET LOCATIONS

Includes All Gooseneck, Stem and Flush Mounting Styles  
ACR is UL Listed for Damp Locations for Gooseneck and Stem Mounting Styles

## CSA LISTED FOR DAMP LOCATIONS

Includes All Chain and Select Cord Hung Mounting Styles  
ACR is UL Listed for Damp Locations

## LIMITED WARRANTY

For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions

## UL CERTIFICATION

UL Listed Fixtures Available upon Request. Please Consult Factory for Additional Information.

**CONSTRUCTION & FINISH**

## POWDER COAT SHADE

Hand-Spun from High Purity 3003-O Temper Aluminum

## PORCELAIN SHADE

Hand-Spun from 20 Gauge Porcelain Steel

## GALVANIZED SHADE

Hand Spun from High Quality Galvanized Steel or from High Purity 3003-O Temper Aluminum for 20" Size Shades

## COPPER

Hand-Spun from High Purity C11000-O60 ETP Copper

## BRASS

Hand-Spun from High Purity C2600-O60 Brass

## POWDER COAT FINISHES

Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured

## PORCELAIN FINISHES

Applied by Hand and Fired in a High Temperature Oven

## STEM

1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Mounting Stem. Custom Lengths Available upon Request.

## GOOSENECK

1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Gooseneck

## CORD

Cord Hung Pendants Include 7', 12' or 20' of Cord, Max Cord Length for GU24 is 12FT (Overall Cord Length is Measured from Base of Socket and Varies Based on Fixture)

**CONSTRUCTION & FINISH (CONT'D.)**

## CHAIN

4-Gauge Chain Complete with Quick Link for On-Site Adjustments to Chain's Length

**LIGHT SOURCE**

## INCANDESCENT

Medium Base E26 Socket, 120 VAC, 200W Max

## COMPACT FLUORESCENT

Bi-Pin Base GU24 Socket, 120 VAC, 23W Max