



BARN LIGHT ELECTRIC COMPANY®

INSTALLATION INSTRUCTIONS VANITY PENDANT

Thank you for purchasing from Barn Light Electric, America's leading manufacturer of hand-crafted shades and exclusive source for porcelain enamel lighting! For questions or concerns about your purchase, please contact us!

INS-0032 REV B (HWK-0038)

IMPORTANT

Read all instructions before assembly. Installation is to be done by a qualified professional.

CAUTION: Risk of fire, this product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

INSTRUCTIONS

The following Installation Instructions apply to single and multi-light vanity pendants:


1. Disconnect power at the electrical panel before installation.
2. Knock out the hole tap on back-plate (A) and install grommet (B).
3. Align hole in back-plate (A) with hole in the ceiling. Feed the power supply wire (C) from junction box through the grommet (B) and mount back-plate (A) to ceiling using the toggle bolts (D) (or other appropriate hardware).
4. Feed cords through cord grips (E) in the front-plate (F). Adjust fixture's cord length.
5. Tighten cord grip (E) with a wrench to secure cord. Do NOT overtighten.

For ease of assembly, attach installation cables/chains (G) to installed studs (H) on front and back plates using nuts (I) (if applicable).

- While the fixture/front-plate (F) hangs, trim cords to desired length, leaving 6" extra for the knot (J).
8. Use wire nut (K) to connect the black wires from each light with the power supply. **NOTE: Wire nuts (K) not included.**
 9. Use wire nut (K) to connect the white wires from each light with the neutral wire. **NOTE: Wire nuts (K) not included.**
 10. Use wire nut (K) to connect the ground wires from the lights and the loose ground wire (L) connected to the back-plate (A) to the ground wire from the 3-wire cord. **NOTE: Wire nuts (K) not included.**
 11. Fit the front plate (F) over the back-plate (A), ensuring that all wire connections are hidden and not being pinched. Fasten the plates together with the machine screws (M) provided.


ALTERNATE FIXTURES

Although the illustration below includes a Guard & Glass Fixture, the alternative fixture follows the same installation instructions.




The 6-Light Pendant Chandelier
(Also available as a 3, 4 and 5-Light Chandelier)

WIRING DIAGRAM

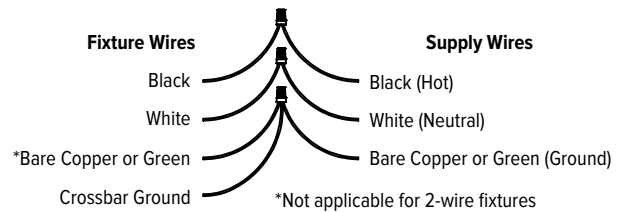

VANITY PENDANT

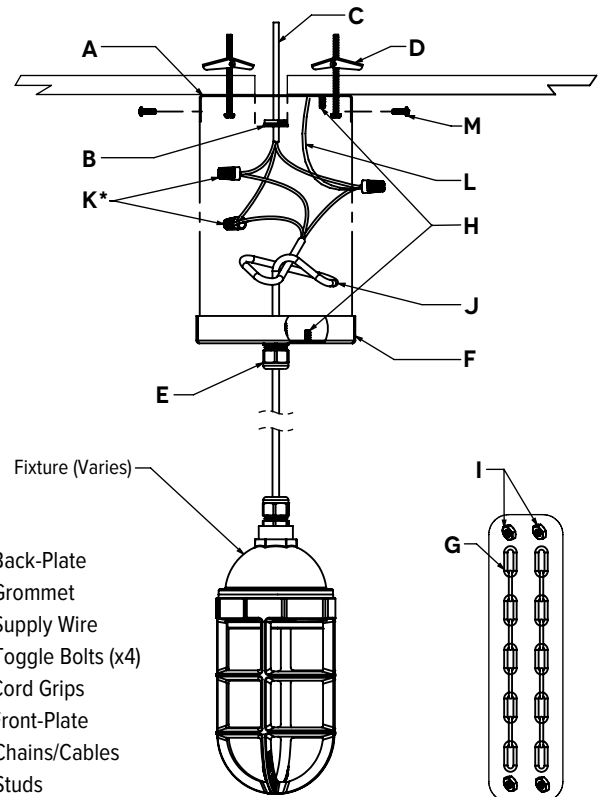

- A. Back-Plate
- B. Grommet
- C. Supply Wire
- D. Toggle Bolts (x4)
- E. Cord Grips
- F. Front-Plate
- G. Chains/Cables
- H. Studs
- I. Nuts
- J. Cord Knot
- K. Wire Nuts*
- L. Ground Wire
- M. Screws

***IMPORTANT:** Wire nuts not included in hardware kit.

Attach to Studs for Ease
of Assembly & Wiring