


**ISOS CONE LED STUDIO PENDANT LIGHT**

JOB NAME: _____ FIXTURE TYPE: _____

BLE - C - STU - - - - - - - - - -**A****B****C****D****E****F****G****H****I****J**

Order Example: BLE - C-STU - ISO24 - 300 - 200 - RST - 36 - 300 - 300 - LED27 - 3000K - DL

A - SHADE SIZE*ISOS CONE:*

ISO12 12" Shade
ISO24 24" Shade
ISO32 32" Shade

B - EXTERIOR SHADE FINISH*POWDER COAT FINISHES:*

100 Black
105 Textured Black
106 Matte Black
200 White
206 Matte White
300 Dark Green
307 Emerald Green
311 Jadite
320 Fern Green
370 Mint
380 Chartreuse
390 Teal
400 Barn Red
420 Orange
430 Soft Clay
470 Watermelon
480 Blush Pink
490 Magenta
495 Sherbet Orange
500 Buttery Yellow
570 Sunflower
600 Bronze
601 Chocolate
605 Rust
607 Taupe
615 Oil-Rubbed Bronze
630 Beige
700 Royal Blue
705 Navy
710 Cobalt Blue
715 Delphite Blue
790 Lavender
800 Industrial Grey
805 Charcoal Granite
810 Graphite
815 Light Gray
975 Galvanized

C - INTERIOR SHADE FINISH*Please Note: See **Section B** for all applicable Finish Options***D - CORDS***CSA LISTED CORD OPTIONS:*

SBK Standard Black
SWH Standard White
CSB Black Cloth
YLW Butter Yellow Cloth
NVY Navy Cloth
RBLU Royal Blue Cloth
SLVR Silver Cloth
CRM Creme Cloth
ORG Orange Cloth
RBS Barn Red & Black Swirl Cloth
NGRN Neon Green Cloth
SBLU Sky Blue Cloth
SFM Sea Foam Cloth
RST Rust Cloth
BPNK Blush Pink Cloth
EGRN Emerald Green Cloth
FGRN Fern Green Cloth
CNF Confetti Cloth

E - CORD & CABLE LENGTH

36 36" Adjustable Cable and Cord
72 72" Adjustable Cable and Cord
108 108" Adjustable Cable and Cord

F - TOP COVER FINISH*Please Note: See **Section B** for all applicable Finish Options*

ASH Ash Wood
MPL Maple Wood
WAL Walnut Wood

G - CANOPY FINISH*Please Note: See **Section B** for all applicable Finish Options*

980 Brushed Aluminum

H - LIGHT SOURCE

LED11 850 Lumen
LED16 1250 Lumen
LED27 2000 Lumen
LED38 3000 Lumen¹
LED43 4000 Lumen¹

I - COLOR TEMPERATURE

2700K 2700K, Warm White
3000K 3000K, Neutral White
3500K 3500K, Bright White
4000K 4000K, Cool White


J - LED LENS

DL Domed Lens
FL Flat Lens


IMPORTANT: (1) Not available with 12" shade size

MOUNTING STYLE


SHOWN: ISO12

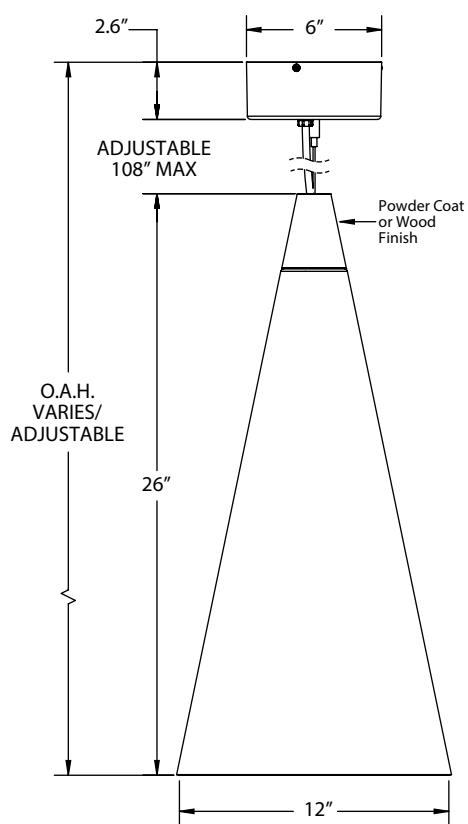

SHOWN: ISO24

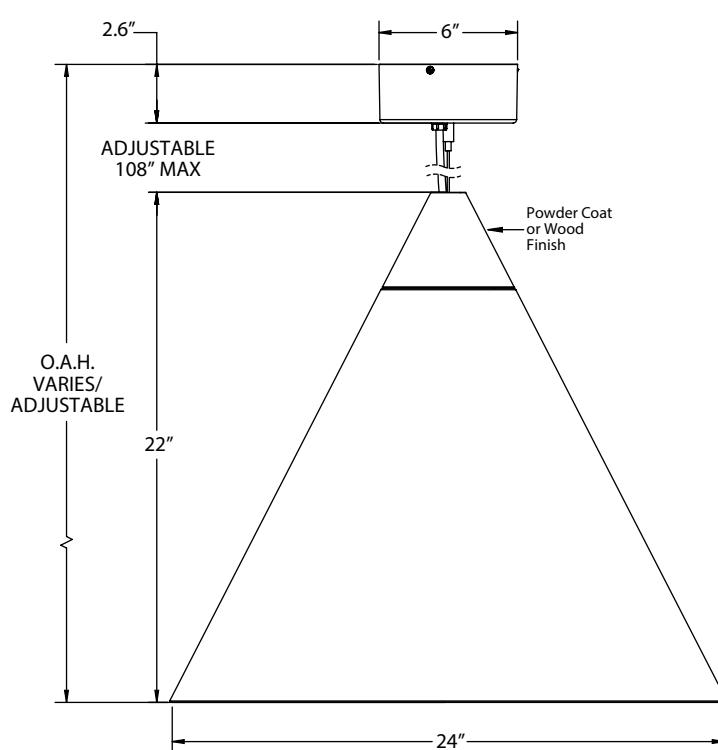

SHOWN: ISO32

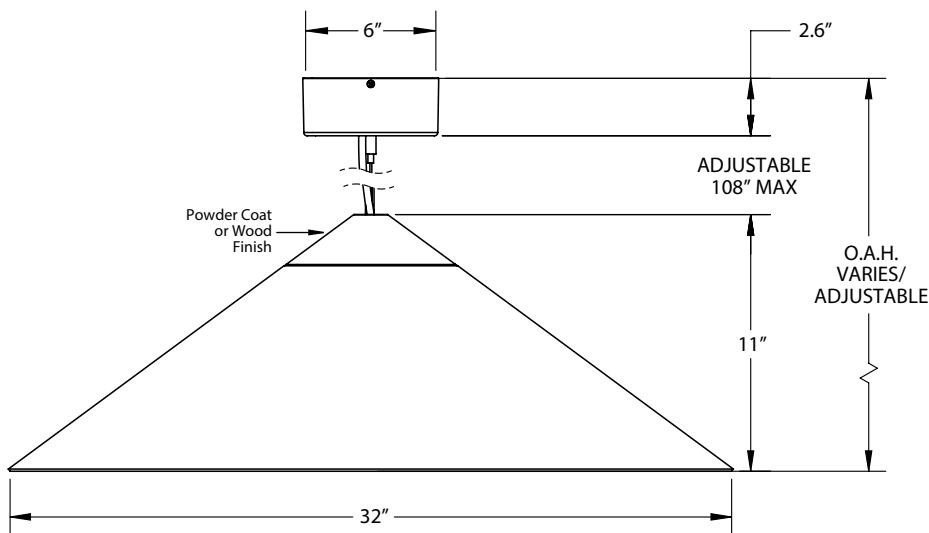

| CABLE & CORD | O.A.H. | | | |
|--------------|-------------------|-------|-------|------|
| | ISO12 | ISO24 | ISO32 | |
| 36 | 36" Cable & Cord | 65" | 61" | 50" |
| 72 | 72" Cable & Cord | 101" | 97" | 86" |
| 108 | 108" Cable & Cord | 137" | 133" | 122" |

SPECIFICATIONS**CERTIFICATIONS, LISTINGS & WARRANTY****MADE IN THE USA**

Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility
Located in Titusville, FL

WOOD SOURCING AND SUSTAINABILITY

All Wood Is Sourced from North American Suppliers Who Practice Responsible Forestry. With Sustainability in Mind, Our Material Suppliers Have Policies in Place Regarding Planned Felling, Minimum Tree Diameter, and Felling Rotation to Ensure Regrowth

CSA LISTED FOR DAMP LOCATIONS**LIMITED WARRANTY**

For Additional Information on Our Limited Warranty, Please See
Our Terms & Conditions

CONSTRUCTION & FINISH**POWDER COAT SHADE**

Hand-Spun from High Purity 3003-O Temper Aluminum

POWDER COAT FINISHES

Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured

STUDIO CABLE

3/32" Galvanized Steel Cable

Griplock® Cable Gripper, is a Unique, Self-Locking, Completely Adjustable Device, Designed to Securely Lock onto a Large Range of Aircraft Cables. It Requires No Tools to Adjust; Up or Down, Down or Up - as Often as You Like.

WOOD

The Wood Detailing of Our American-Made Lighting Is Handcrafted from Solid Hardwoods by Our In-House Artisans.

Custom Woods Are Available upon Request, Please Contact Our Sales Team for Additional Information.

WOOD FINISH

The Finish Is a Hand-Rubbed Danish Oil Which Is Buffed and Waxed to a Natural Sheen Using Pure Carnauba Wax

LED LIGHT SOURCE

AVAILABLE CCT: 2700K, 3000K, 3500K, 4000K

90+ CRI

ELECTRICAL/LED DRIVER

POWER FACTOR > 0.9

EFFICIENCY: UP TO 87% TYPICAL

INPUT VOLTAGE: 120-277 VAC (SEE DIMMING SECTION)

CLASS 2 POWER SUPPLY

LED DRIVER LIFETIME: > 100,000 HOURS (@ 25 DEG C AMBIENT)

IP64 MINIMUM RATING CASE WITH SILICONE-BASED POTTING

PROTECTIONS

Output Open Load, Over-Current and Short-Circuit (hiccup), and Over-Temperature with Auto Recovery

CONDUCTED AND RADIATED EMI

Compliant with FCC CFR Title 47 Part 15 Class B (120 Vac), Class A (277 Vac) and EN55015 (CISPR 15) at 220, 230 and 240 Vac

COMPLIANT WITH

Complies with Energy Star® DLR (DesignLight Consortium®) and CA Title 24 Technical Requirements

DIMMING**TRI-MODE DIMMING™**

Compatible with TRIAC (forward-phase or leading-edge), ELV (reverse-phase or trailing-edge) and 0-10 V Dimmers

DIMMING RANGE 1-100%

The Dimming Range Is Dependent on Each Specific Dimmer. May Not Be Able to Achieve 1% Dimming with Some Dimmers.

TRIAC AND ELV DIMMING ONLY AT 120 VAC

ELV DIMMING AT 230 VAC
Available by Request

COMPATIBLE DIMMERS

Consult Factory for Additional Information on Dimming