



BLE - \_\_\_\_\_ - RGU - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_  
 A B C D E F G  
 \_\_\_\_\_  
 H


Order Example: BLE - C - RGU - 420 - SBK - 100 - RIB - NA - LED16.8 - 2700K

A - MOUNTING STYLE	C - MOUNTING	D - MOUNTING FINISH	F - MOUNTING ACCESSORY <sup>4</sup>
<b>C</b> Cord Hung <b>S</b> Stem Mount <b>F</b> Flush Mount	<b>CSA LISTED CORD OPTIONS:</b> <b>SBK</b> Standard Black <b>SWH</b> Standard White <b>CSB</b> Black Cloth <b>CSW</b> White Cloth <b>CSR</b> Red Cloth <b>CSBB</b> Black & Brown Cloth <b>CSRW</b> Red & White Cloth <b>CSGW</b> Gold & White Cloth <b>CSBG</b> Black & Gold Cloth <b>CSBW</b> Black & White Cloth <b>CSBP</b> Black & Pink Cloth <b>CSUW</b> Blue & White Cloth  <b>NON-CSA LISTED CORD OPTIONS:</b> <b>CBK</b> Black Cotton <b>CMG</b> Grey Cotton <b>CRZ</b> Red Chevron <b>TBK</b> Black Cotton Twist <sup>1</sup> <b>TWH</b> White Cotton Twist <sup>1</sup> <b>TBR</b> Brown Cotton Twist <sup>1</sup> <b>TRD</b> Red Cotton Twist <sup>1</sup> <b>TPT</b> Putty Cotton Twist <sup>1</sup> <b>TBW</b> Black & White Twist <sup>1</sup> <b>TRW</b> Red & White Twist <sup>1</sup> <b>TBB</b> Brown & Beige Twist <sup>1</sup>  <b>STEM MOUNT OPTIONS:</b> <b>ST506</b> .5" Stem Mount, 6" <b>ST512</b> .5" Stem Mount, 12" <b>ST518</b> .5" Stem Mount, 18" <b>ST524</b> .5" Stem Mount, 24" <b>ST536</b> .5" Stem Mount, 36" <b>ST548</b> .5" Stem Mount, 48" <b>ST706</b> .75" Stem Mount, 6" <b>ST712</b> .75" Stem Mount, 12" <b>ST718</b> .75" Stem Mount, 18" <b>ST724</b> .75" Stem Mount, 24" <b>ST736</b> .75" Stem Mount, 36" <b>ST748</b> .75" Stem Mount, 48"  <b>FLUSH MOUNT OPTIONS:</b> <b>FM</b>	<b>E - GLASS OPTION<sup>2</sup></b> <b>NA</b> None <b>CLR</b> Clear Glass <sup>3</sup> <b>FST</b> Frosted Glass <b>RIB</b> Ribbed Glass <b>CCR</b> Clear Crackle Glass <b>SMK</b> Smoke Crackle Glass <b>HCR</b> Honey Crackle Glass  <b>Please Note: See Section B for all applicable Mounting Finish Options (I) If Cord Hung [C] Mounting Style, selection identifies canopy finish (II) If Flush Mount [F] Mounting Style, select NA (III) If Stem Mount [S] Mounting Style, selection identifies stem and canopy finish</b> <b>NA</b> Not Applicable	<b>NA</b> None/Not Applicable <b>HSC</b> Hang Straight Canopy <b>HDSMC</b> Heavy Duty Stem Mount Canopy
<b>B - FIXTURE FINISH</b> <b>POWDER COAT FINISHES:</b> <b>100</b> Black <b>105</b> Textured Black <b>200</b> White <b>300</b> Dark Green <b>307</b> Emerald Green <b>311</b> Jadite <b>370</b> Mint <b>380</b> Chartreuse <b>390</b> Teal <b>400</b> Barn Red <b>420</b> Orange <b>470</b> Watermelon <b>480</b> Blush Pink <b>490</b> Magenta <b>500</b> Buttery Yellow <b>570</b> Sunflower <b>600</b> Bronze <b>601</b> Chocolate <b>605</b> Rust <b>615</b> Oil-Rubbed Bronze <b>700</b> Royal Blue <b>705</b> Navy <b>710</b> Cobalt Blue <b>715</b> Delphite Blue <b>800</b> Industrial Grey <b>805</b> Charcoal Granite <b>810</b> Graphite <b>975</b> Galvanized			<b>G - LIGHT SOURCE</b> <b>E26</b> 100 Watt Max <b>GU24</b> 24 Bi-Pin, 18W Max <b>LED16.8</b> 16W LED, 1600 Lumen
			<b>H - COLOR TEMPERATURE<sup>5</sup></b> <b>NA</b> Not Applicable <b>2700K</b> 2700K, Warm White <b>3000K</b> 3000K, Neutral White <b>3500K</b> 3500K, Bright White <b>4000K</b> 4000K, Cool White


**IMPORTANT:** (1) Not available in LED (2) If LED16.8 Light Source is selected in Section G, glass option is required (3) Not recommended if LED Light Source is selected in Section G (4) Only applicable if Stem Mounting Style is selected in Section A (5) Only applicable if LED16.8 Light Source is selected in Section G, select NA is non-LED source selected

**MOUNTING STYLE**


**CORD HUNG PENDANT (C)**

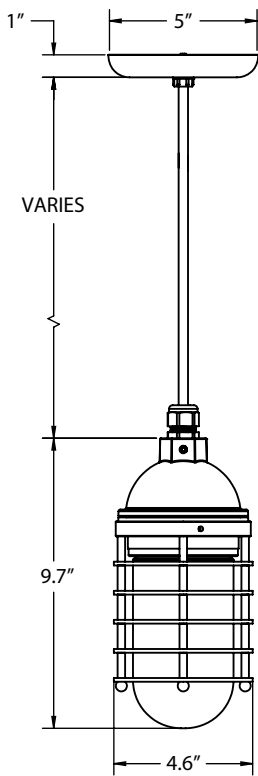

**FLUSH MOUNT (F)**

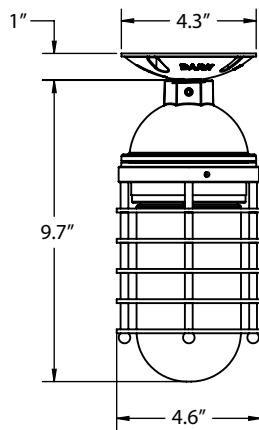

**STEM MOUNT PENDANT (S)**

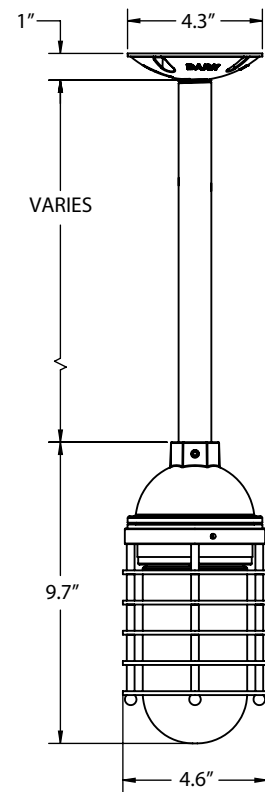

**LIGHT SOURCE**

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact the factory.

OPTION	WATTAGE	LUMENS <small>*Avg. value, actual value dependent on bulb used</small>	CRI	VOLTAGE	DIMMING
<b>INCANDESCENT (MED E26)</b>					
<b>E26</b>	100W Max	1600*	100*	120 VAC	Bulb Dependant
<b>COMPACT FLOURESCENT (GU24 CFL)</b>					
<b>GU24</b>	18W Max	1600*	75*	120 VAC	Bulb Dependant
<b>LED</b>					
<b>LED16.8</b>	16.8W	1600	>90	120 VAC	TRIAC

**SPECIFICATIONS**

**MOUNTING**

STEM  
1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Mounting Stem. Custom Lengths Available upon Request.

CORD  
Cord-hung Pendants Include 7' Of Standard Cord Or 5' Of Cotton Cord, +/- For Socket Orientation

**LED SPECIFICATIONS**

LUMEN MAINTENANCE  
LED16.8 Source is L90(11K) > 61,000 Hours

COLOR TEMPERATURES  
Standard Color Temperatures Available Include 2700K, 3000K, 3500K and 4000K. Custom Temperatures Available upon Request.

CRI  
Minimum 90 CRI, Consult Factory for Other CRI Options

EFFICACY  
Up to 100 LPW Based on Wattage/Lumens in the Table

DRIVER & DIMMING OPTION  
Relient on Triac Dimming 12W / 120W, up to 5% Dimming. Requires Compatible Dimming Switch.

**SHADE & FINISHES**

STATIC RINGS  
Constructed of 6061-T6 Aluminum

POWDER COAT FINISHES  
Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured

**CERTIFICATIONS, LISTINGS & WARRANTY**

MADE IN THE USA  
Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS  
Includes All Stem Mounting Styles

CSA LISTED FOR DAMP LOCATIONS  
Includes Select Cord Hung Mounting Styles

LIMITED WARRANTY  
For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions