



PROJECT TYPE \_\_\_\_\_

SPS-0046

BLE - 501 - TW - \_\_\_\_\_ - \_\_\_\_\_  
                                    **A**                                    **B**

Order Example: BLE - 501 - TW - TPT - 72


## A - COTTON TWIST CORD

<b>TBR</b>	Brown Cotton Twist
<b>TBK</b>	Black Cotton Twist
<b>TPT</b>	Putty Cotton Twist

## B - CORD LENGTH

<b>36</b>	36" Inches
<b>48</b>	48" Inches
<b>60</b>	60" Inches
<b>72</b>	72" Inches

## DIMENSIONAL DRAWING

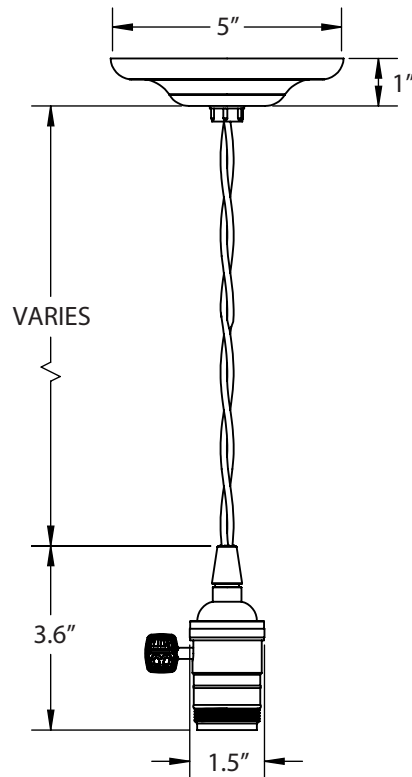

**IMPORTANT:**

## LIGHT SOURCE

All published luminaire photometric testing is performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact our manufacturing facility or a sales representative.

OPTION	WATTAGE	CRI	VOLTAGE	DIMMING
INCANDESCENT (MED E26)				
E26	60W Max	100	120 VAC	Bulb Dependent

## SPECIFICATIONS

## DESIGN & FINISH

ANTIQUE AESTHETIC  
Embellished with a Single Turn Antique Style Paddle Key

CANOPY  
5" Ceiling Canopy Finished in Raw Brass

## CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA  
Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility  
Located in Titusville, FL

CSA LISTED FOR DRY LOCATIONS

LIMITED WARRANTY  
For Additional Information on Our Limited Warranty, Please See  
Our Terms & Conditions