
JOB NAM	1E:		FIXTU	IRE TYPE:						
3LE - S - QS -		-	-		-		-			
	Α	В		С		D	- <u> </u>	E		
Order Example: BLE - S -	QS - WHS12 - 6	500 - ST718 - H	ISC - NA							
A - SHADE SIZE		B - SHADE FINISH			C - MOUNTING OPTIONS			D - C	D - CANOPY	
THE ORIGINAL™: WHS12 12" Shade WHS16 16" Shade		POWDER COAT FINISHES ¹ : 100 Black 200 White			STEM MOUNT OPTIONS: \$			sc HSC	Standard Canopy Hang Straight Canopy	
		600 Bronze			ST718 .75" Stem Mount, 18" ST724 .75" Stem Mount, 24"				HADE ACCESSORY	
		975 Galvanized		NA WC				None/No Wire Cage Wire Cage²		

MOUNTING DIMENSIONS

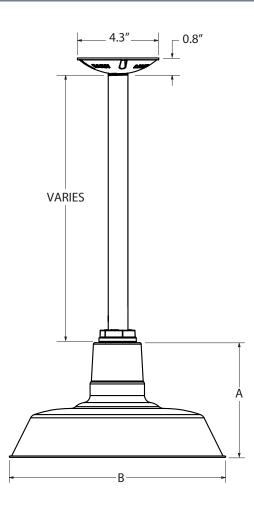

SHADE CODE	HEIGHT (A)	DIAMETER (B)
WHS12	7″	12″
WHS16	7.75″	16″

BARN LIGHT ELECTRIC CO.

THE ORIGINALTM QUICK SHIP STEM MOUNT LIGHT SPS-0330 REV B

SPECIFICATIONS	
CERTIFICATIONS, LISTINGS & WARRANTY	LIGHT SOURCE
MADE IN THE USA Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL	INCANDESCENT Medium Base E26 Socket, 120 VAC, 200W Max
CSA LISTED FOR WET LOCATIONS	
LIMITED WARRANTY For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions	
CONSTRUCTION & FINISH	
POWDER COAT SHADE Hand-Spun from High Purity 3003-O Temper Aluminum	
GALVANIZED SHADE Hand Spun from High Quality Galvanized Steel	
POWDER COAT FINISHES Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured	
STEM 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Mounting Stem. Custom Lengths Available upon Request.	