




SPS-0074 REV B

**LARAMIE WALL SCONCE**

JOB NAME: \_\_\_\_\_ FIXTURE TYPE: \_\_\_\_\_



BLE - W - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_  
 - \_\_\_\_\_ A \_\_\_\_\_ B \_\_\_\_\_ C \_\_\_\_\_ D \_\_\_\_\_ E \_\_\_\_\_ F  
 - \_\_\_\_\_ G \_\_\_\_\_ H \_\_\_\_\_ I

Order Example: BLE - W - LAR12 - 705 - CGG - RIB - 705 - NA - NA - DD - E26

**A - SHADE SIZE****LARAMIE:**

**LAR12** 12" Shade  
**LAR16** 16" Shade

**B - FIXTURE FINISH****POWDER COAT FINISHES<sup>1</sup>:**

**100** Black  
**105** Textured Black  
**106** Matte Black  
**200** White  
**206** Matte White  
**300** Dark Green  
**307** Emerald Green  
**311** Jadite  
**370** Mint  
**380** Chartreuse  
**390** Teal  
**400** Barn Red  
**420** Orange  
**470** Watermelon  
**480** Blush Pink  
**490** Magenta  
**495** Sherbet Orange  
**500** Buttery Yellow  
**570** Sunflower  
**600** Bronze  
**601** Chocolate  
**605** Rust  
**615** Oil-Rubbed Bronze  
**700** Royal Blue  
**705** Navy  
**710** Cobalt Blue  
**715** Delphite Blue  
**790** Lavender  
**800** Industrial Grey  
**805** Charcoal Granite  
**810** Graphite  
**975** Galvanized

**C - OPTIONAL ACCESSORY**

**NA** None  
**WC** Wire Cage  
**TGG** Heavy Duty Guard  
**CGG** Cast Guard  
**WGG** Wire Guard

**D - GLASS OPTION<sup>2</sup>**

**NA** Not Applicable  
**CLR** Clear Glass  
**FST** Frosted Glass  
**RIB** Ribbed Glass

**E - OPTIONAL ACCESSORY FINISH**

*Please Note: See Section B for all optional accessory finish options. (1) If no accessory is selected in Section C, select NA.*

**NA** Not Applicable

**F - PLUG-IN OPTION**

**NA** None  
**L-WL** Plug with Inline On/Off Switch<sup>3</sup>

**G - PLUG-IN CORD OPTION**

**NA** Not Applicable

**CSA LISTED CORD OPTIONS:**

**SBK** Standard Black Cord  
**SWH** Standard White Cord  
**CSB** Black Cloth Cord  
**CSW** White Cloth Cord  
**CSR** Red Cloth Cord  
**CSBW** Black & White Cloth  
**CSRW** Red & White Cloth  
**CSBG** Black & Gold Cloth  
**CSBP** Black & Pink Cloth  
**CSGW** Gold & White Cloth  
**CSUW** Blue & White Cloth  
**CSBB** Black & Brown Cloth  
**CRZ** Red Chevron  
**CMG** Grey Cotton

**H - DUSK-TO-DAWN PHOTOCELL<sup>4</sup>**


**NA** None/Not Applicable  
**DD** Dusk-to-Dawn Photocell<sup>4</sup>

**I - LIGHT SOURCE**

**E26** 200 Watt Max  
**GU24** 24 Bi-Pin, 23W Max<sup>5</sup>

**IMPORTANT:** (1) All Powder Coat finished shades, with the exception of Galvanized, feature a white interior (2) Guard and Glass accessory reduces incandescent wattage to 100W Max and GU24 Bi-Pin to 18W Max (3) SWH-Standard White Cord and CSW-White Cloth Cord include a white plug and switch, all other cord options will include a black plug and switch (4) Dusk-to-Dawn Photocell not applicable if Plug-In Option selected in Section F (5) Fixtures configured with GU24 socket are non-returnable

**MOUNTING DIMENSIONS**

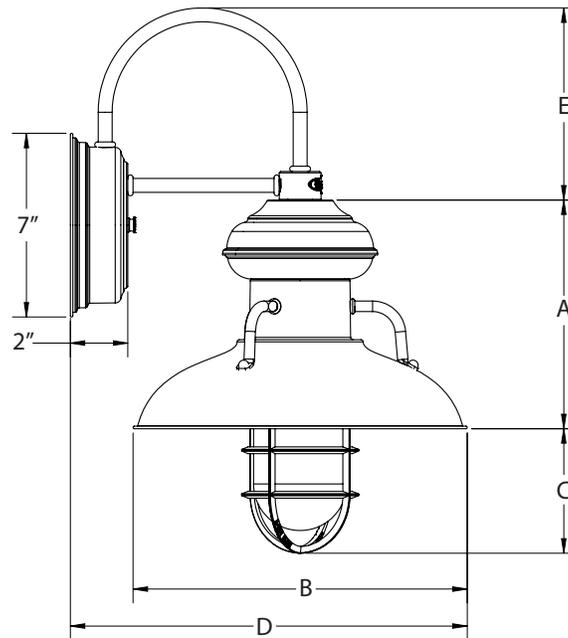

SHADE CODE	HEIGHT (A)	DIAMETER (B)	EXTENSION (C)	PROJECTION (D)	ARM HEIGHT (E)
LAR12	8"	12"	5"	14"	6.9"
LAR16	10"	16"	3"	18"	8.3"

**SPECIFICATIONS**

**CERTIFICATIONS, LISTINGS & WARRANTY**

MADE IN THE USA  
 Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility  
 Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS  
 (Plug-In Option CSA Listed for Dry Location Only)

LIMITED WARRANTY  
 For Additional Information on Our Limited Warranty, Please See  
 Our Terms & Conditions

UL CERTIFICATION  
 UL Listed Fixtures Available upon Request. Please Consult Factory  
 for Additional Information.

**CONSTRUCTION & FINISH**

POWDER COAT SHADE  
 Hand-Spun from High Purity 3003-O Temper Aluminum

GALVANIZED SHADE  
 Hand Spun from High Quality Galvanized Steel

POWDER COAT FINISHES  
 Polyester Powder Coat Finishes Are Electro-Statically Applied and  
 Thermocured

**CONSTRUCTION & FINISH (CONTINUED)**

BACKING PLATE  
 Hand-Spun from High Purity 3003-O Temper Aluminum

WALL SCONCE ARM  
 1/4" Nominal (0.50" Actual) Steel/Aluminum Mounting Arm

CORD & PLUG  
 Complete with 8 Feet of Cord, 2-Prong Polarized Plug and Inline  
 On/Off Switch

**LIGHT SOURCE**

INCANDESCENT  
 Medium Base E26 Socket, 120 VAC, 200W Max

COMPACT FLUORESCENT  
 Bi-Pin Base GU24 Socket, 120 VAC, 23W Max