



PROJECT TYPE _____

BLE - QS - S - _____ - _____ - _____ - _____ - _____
A B C D E

A - SHADE SIZE

B - FINISHES

100	Black
200	White
300	Dark Green
975	Galvanized

C - MOUNTING OPTIONS

ST706 .75" Stem Mount, 6"
ST712 .75" Stem Mount, 12"
ST718 .75" Stem Mount, 18"
ST724 .75" Stem Mount, 24"


D - CANOPY

SC	Standard Canopy
HSC	Hang Straight Canopy

E - WIRE CAGE

NA	None/No Wire Cage
WC	Wire Cage ²

DIMENSIONAL DRAWING

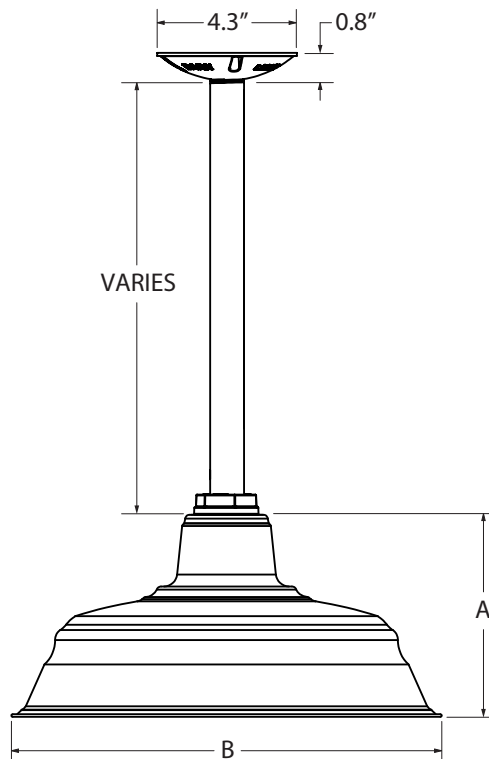

SHADE CODE	HEIGHT (A)	DIAMETER (B)
WHB13	6"	13"
WHB17	8.25"	17"

LIGHT SOURCE

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact the factory.

OPTION	WATTAGE	LUMENS <small>*Avg. value, actual value dependent on bulb used</small>	CRI	VOLTAGE	DIMMING
INCANDESCENT (MED E26)					
E26	200W Max	*3000	*100	120 VAC	Bulb Dependant

SPECIFICATIONS	
CERTIFICATIONS, LISTINGS & WARRANTY	DESIGN
MADE IN THE USA Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL	BOMBER SHADE Hand-Spun from High Purity 0.050" Thick 3003-O Temper Aluminum
CSA LISTED FOR WET LOCATIONS	POWDER COAT FINISHES Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured
LIMITED WARRANTY For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions	STEM 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Mounting Stem. Custom Lengths Available upon Request.