




SPS-0349 REV C

BANTAM CHESTNUT WALL SCNCE

JOB NAME: _____ FIXTURE TYPE: _____



BLE - W - CLAR8 - A - B - C - D - E - F - G - H

Order Example: BLE - W - CLAR8 - 300 - NA - NA - L-WL - CSB - NA - E26

A - SHADE SIZE**CHESTNUT:****CLAR8** 8" Shade**B - FIXTURE FINISH****POWDER COAT FINISHES¹:**

100	Black
105	Textured Black
106	Matte Black
200	White
206	Matte White
300	Dark Green
307	Emerald Green
311	Jadite
370	Mint
380	Chartreuse
390	Teal
400	Barn Red
420	Orange
470	Watermelon
480	Blush Pink
490	Magenta
495	Sherbet Orange
500	Buttery Yellow
570	Sunflower
600	Bronze
601	Chocolate
605	Rust
615	Oil-Rubbed Bronze
700	Royal Blue

B - FIXTURE FINISH (CONTINUED)**POWDER COAT FINISHES¹:**

705	Navy
710	Cobalt Blue
715	Delphite Blue
790	Lavender
800	Industrial Grey
805	Charcoal Granite
810	Graphite
975	Galvanized

C - SHADE ACCESSORY OPTION

NA	None
WC	Wire Cage

D - SHADE ACCESSORY FINISH

Please Note: See **Section B** for all optional accessory finish options. If no accessory is selected in Section C, please select NA.

NA	Not Applicable
-----------	----------------

E - PLUG-IN OPTION

NA	None
L-WL	Plug with Inline On/Off Switch ²

F - PLUG-IN CORD OPTION

NA	Not Applicable
-----------	----------------

CSA LISTED CORD OPTIONS:

SBK	Standard Black Cord
SWH	Standard White Cord
CSB	Black Cloth Cord
CSW	White Cloth Cord
CSR	Red Cloth Cord
CSBW	Black & White Cloth
CSRW	Red & White Cloth
CSBG	Black & Gold Cloth
CSBP	Black & Pink Cloth
CSGW	Gold & White Cloth
CSUW	Blue & White Cloth
CSBB	Black & Brown Cloth
CRZ	Red Chevron
CMG	Grey Cotton


G - DUSK-TO-DAWN PHOTOCELL

NA	None/Not Applicable
DD	Dusk-to-Dawn Photocell ³

H - LIGHT SOURCE

E26	200 Watt Max
GU24	24 Bi-Pin, 23W Max ⁴

IMPORTANT: (1) All Powder Coat finished shades, with the exception of Galvanized, feature a white interior (2) SWH-Standard White Cord and CSW-White Cloth Cord include a white plug and switch, all other cord options will include a black plug and switch (3) Not applicable if Plug with Inline On/Off Switch selected in Section C (4) Fixtures configured with GU24 socket are non-returnable

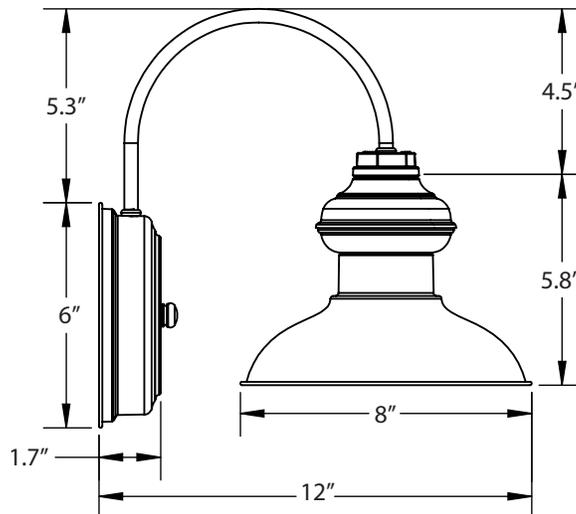MOUNTING DIMENSIONS

SPECIFICATIONS

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA
Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility
Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS
(Plug-In Option CSA Listed for Dry Location Only)

LIMITED WARRANTY
For Additional Information on Our Limited Warranty, Please See
Our Terms & Conditions

UL CERTIFICATION
UL Listed Fixtures Available upon Request. Please Consult Factory
for Additional Information.

LIGHT SOURCE

INCANDESCENT
Medium Base E26 Socket, 120 VAC, 200 Watt Max

COMPACT FLUORESCENT
Bi-Pin Base GU24 Socket, 120 VAC, 23 Wat Max

CONSTRUCTION & FINISHES

BACKING PLATE & SHADE
Hand-Spun from High Purity 3003-O Temper Aluminum

GALVANIZED SHADE
Hand Spun from High Quality Galvanized Steel

WALL SCONCE ARM
1/4" Nominal (0.50" Actual) Steel/Aluminum Mounting Arm

POWDER COAT FINISHES
Polyester Powder Coat Finishes Are Electro-Staticly Applied and
Thermocured

CORD & PLUG
Complete with 8 Feet of Cord and 2-Prong Polarized Plug, Includes
Inline On/Off Switch