

LAFAYETTE SOHO STUDIO LIGHT

FIXTURE TYPE:




BLE - STU - SOH - LAF -		-	
	Α		В

Order Example: BLE - STU - SOH - LAF - 705 - 705

- SHAI	DE FINISH	A - SHAD	DE FINISH (CONTINUED)	B - SHADE TOP FINISH
OWDE	R COAT FINISHES1:	POWDER	R COAT FINISHES1:	Please Note: See Section A for Finish Options.
100	Black	601	Chocolate	(I) Natural Metals are not available for Shade Top
105	Textured Black	605	Rust	
106	Matte Black	615	Oil-Rubbed Bronze	
200	White	700	Royal Blue	
206	Matte White	705	Navy	
300	Dark Green	710	Cobalt Blue	
307	Emerald Green	715	Delphite Blue	
311	Jadite	790	Lavender	
370	Mint	800	Industrial Grey	
380	Chartreuse	805	Charcoal Granite	
390	Teal	810	Graphite	
400	Barn Red	975	Galvanized	
420	Orange			
470	Watermelon	NATURA	L METALS ² :	
480	Blush Pink	995	Raw Copper	
490	Magenta	996	Weathered Copper	
495	Sherbet Orange	997	Raw Brass	
500	Buttery Yellow	998	Weathered Brass	
570	Sunflower	999	Oil-Rubbed Copper	
600	Bronze			

IMPORTANT: (1) All Powder Coat finished shades, 975-Galvanized excluded, feature a white interior (2) Natural Metals have a longer estimated manufacturing time, please check the website for exact lead time. There are no returns accepted on Natural Metals

MOUNTING DIMENSIONS

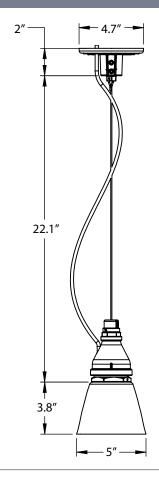

SPECIFICATIONS

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA

Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR DAMP LOCATIONS

LIMITED WARRANTY

For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions

UL CERTIFICATION

UL Listed Fixtures Available upon Request. Please Consult Factory for Additional Information.

CONSTRUCTION & FINISH

POWDER COAT SHADE

Hand-Spun from High Purity 3003-O Temper Aluminum

POWDER COAT FINISHES

Polyester Powder Coat Finishes are Electro-Statically Applied and Thermocured on the Shade

GALVANIZED SHADE

Spun from High Quality Galvanized Steel

COPPER

Hand-Spun from High Purity C11000-O60 ETP Copper

BRASS

Hand-Spun from High Purity C2600-O60 Brass

STUDIO CABLE

18'' Cable Constructed with 3/32'' Galvanized Steel Wire, Complete with a Black Cord

LIGHT SOURCE

INCANDESCENT

Medium Base E26 Socket, 120 VAC, 60 Watt Max