



BLE - \_\_\_\_\_ - BIS - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_  
 A B C D E F

Order Example: BLE - C - BIS - 307 - SBK - 200 - NA - GU24

**A - MOUNTING STYLE**

- C** Cord Hung
- F** Flush Mount
- G** Gooseneck
- S** Stem Mount

**B - SHADE FINISHES**

*POWDER COAT FINISHES<sup>1</sup>:*

- 100** Black
- 105** Textured Black
- 200** White
- 300** Dark Green
- 307** Emerald Green
- 311** Jadite
- 370** Mint
- 380** Chartreuse
- 390** Teal
- 400** Barn Red
- 420** Orange
- 470** Watermelon
- 480** Blush Pink
- 490** Magenta
- 500** Buttery Yellow
- 570** Sunflower
- 600** Bronze
- 601** Chocolate
- 605** Rust
- 615** Oil-Rubbed Bronze
- 700** Royal Blue
- 705** Navy
- 710** Cobalt Blue
- 715** Delphite Blue
- 800** Industrial Grey
- 805** Charcoal Granite
- 810** Graphite
- 975** Galvanized

**C - MOUNTING**

*CSA LISTED CORD OPTIONS:*

- SBK** Standard Black
- SWH** Standard White
- CSB** Black Cloth
- CSW** White Cloth
- CSR** Red Cloth
- CSBB** Black & Brown Cloth
- CSRW** Red & White Cloth
- CSGW** Gold & White Cloth
- CSBG** Black & Gold Cloth
- CSBW** Black & White Cloth
- CSBP** Black & Pink Cloth
- CSUW** Blue & White Cloth

*NON-CSA LISTED CORD OPTIONS:*

- CBK** Black Cotton
- CMG** Grey Cotton
- CRZ** Red Chevron
- TBK** Black Cotton Twist
- TWH** White Cotton Twist
- TBR** Brown Cotton Twist
- TRD** Red Cotton Twist
- TPT** Putty Cotton Twist
- TBW** Black & White Twist
- TRW** Red & White Twist
- TBB** Brown & Beige Twist

*FLUSH MOUNT OPTIONS:*  
**FM**

*GOOSENECK OPTIONS:*

- G1**           **G16**
- G2**           **G17**
- G3**           **G19**
- G4**           **G22**
- G5**           **G24**
- G6**           **G25**
- G7**           **G26**
- G8**           **G32**
- G9**           **G34**
- G10**          **G35**
- G11**          **G36**
- G12**          **G40**
- G13**          **G64**
- G14**          **G65**
- G15**

**C - MOUNTING (CONTINUED)**

*STEM MOUNT OPTIONS:*

- ST506** .5" Stem Mount, 6"
- ST512** .5" Stem Mount, 12"
- ST518** .5" Stem Mount, 18"
- ST524** .5" Stem Mount, 24"
- ST536** .5" Stem Mount, 36"
- ST548** .5" Stem Mount, 48"
- ST706** .75" Stem Mount, 6"
- ST712** .75" Stem Mount, 12"
- ST718** .75" Stem Mount, 18"
- ST724** .75" Stem Mount, 24"
- ST736** .75" Stem Mount, 36"
- ST748** .75" Stem Mount, 48"

**D - MOUNTING FINISH**

*Please Note: See Section B for all applicable Mounting Finish Options. 980-Brushed Aluminum is also available for Gooseneck and Stem mounting styles.*  
 (I) If Cord Hung [C] or Flush Mount [F] Mounting Style, selection identifies ceiling canopy finish  
 (II) If Stem Mount [S] Mounting Style, selection identifies stem and ceiling canopy finish  
 (III) If Gooseneck [G] Mounting Style, selection identifies gooseneck and backing plate finish

- 980** Brushed Aluminum

**E - MOUNTING ACCESSORY**

- NA** Not Applicable/None
- HSC** Hang Straight Canopy<sup>2</sup>
- HDSMC** Heavy Duty Stem Mount Canopy<sup>2</sup>
- HDBP** Heavy Duty Backing Plate<sup>2</sup>
- DD** Dusk-to-Dawn Photocell<sup>3</sup>


**F - LIGHT SOURCE**

- E26** 200 Watt Max
- GU24** 24 Bi-Pin, 23W Max<sup>4</sup>


**IMPORTANT:** (1) All Powder Coat finished shades, Galvanized excluded, feature a white interior (2) Only applicable if Stem Mount Mounting Style is selected in Section A (3) Only applicable if Gooseneck Mounting Style is selecting in Section A (4) Fixtures configured with a GU24 socket are non-returnable

**MOUNTING STYLE**


**CORD HUNG PENDANT (C)**

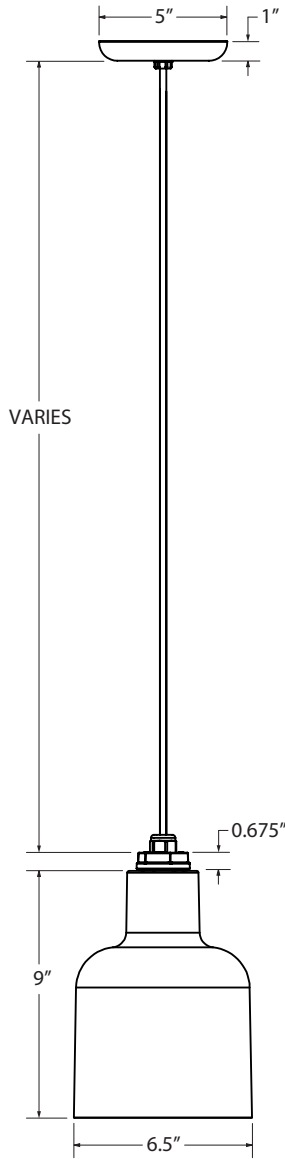


**FLUSH MOUNT (F)**

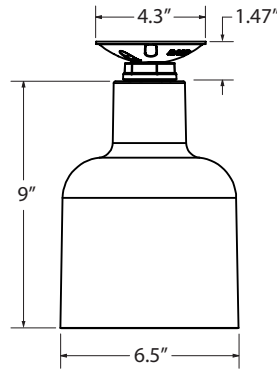

**STEM MOUNT PENDANT (S)**

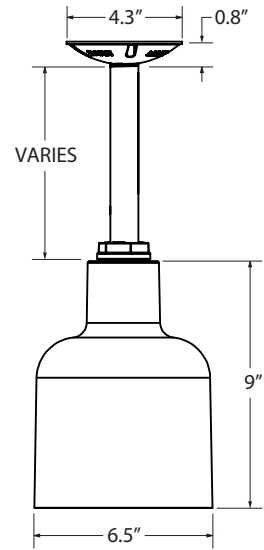

**GOOSENECK (G)**

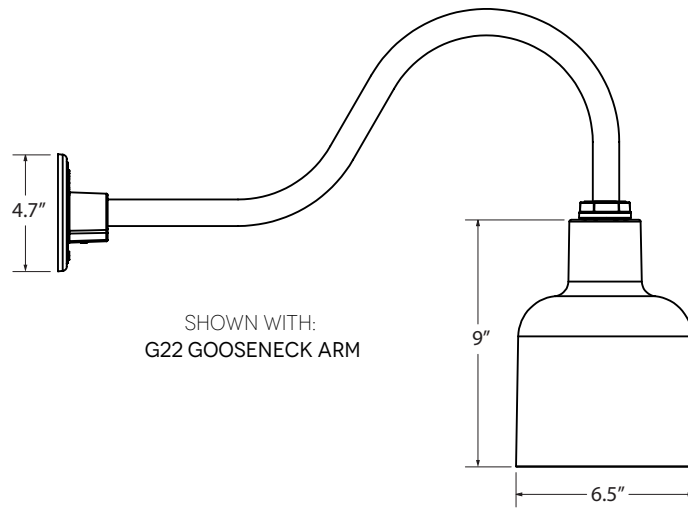

**LIGHT SOURCE**

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact the factory.

OPTION	WATTAGE	LUMENS <small>*Avg. value, actual value dependent on bulb used</small>	CRI	VOLTAGE	DIMMING
<b>INCANDESCENT (MED E26)</b>					
E26	200W Max	*3000	*100	120 VAC	Bulb Dependant
<b>COMPACT FLOURESCENT (GU24 CFL)</b>					
GU24	23W Max	*1600	*75	120 VAC	Bulb Dependant

**SPECIFICATIONS**

**MOUNTING**

STEM  
1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Mounting Stem. Custom Lengths Available upon Request.

GOOSENECK  
1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Gooseneck

CORD  
Cord-hung Pendants Include 7' Of Standard Cord Or 5' Of Cotton Cord, +/- For Socket Orientation

**SHADE & FINISHES**

THE CHATEAU SHADE  
Hand-Spun from High Purity 0.050" Thick 3003-O Temper Aluminum

POWDER COAT FINISHES  
Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured

**CERTIFICATIONS, LISTINGS & WARRANTY**

MADE IN THE USA  
Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS  
Includes Flush, Gooseneck and Stem Mounting Styles

CSA LISTED FOR DAMP LOCATIONS  
Includes Select Cord Mounting Styles

CSA LISTED FOR DRY LOCATIONS  
Includes Select Cord Mounting Styles

LIMITED WARRANTY  
For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions