



SPS-0361 REV B

SEASIDE STUDIO LIGHT

JOB NAME: _____ FIXTURE TYPE: _____



BLE - C - STU -		-		-		-		-		-		-	
A		B		C		D		E		F			
-		-		-		-		-		-			
G		H		I									

Order Example: BLE - C - STU - RWS16 - 850 - SBK - 36 - 850 - CGG - CLR - 850 - E26

A - SHADE SIZE**SEASIDE RADIAL WAVE:**

RWS12	12" Shade
RWS14	14" Shade
RWS16	16" Shade

B - SHADE FINISH**PORCELAIN FINISHES¹:**

150	Black
250	White
350	Vintage Green
355	Jadite
455	Cherry Red
550	Yellow
650	Bronze
750	Cobalt Blue
765	Delphite Blue
850	Graphite
950	Metallic Chrome

POWDER COAT FINISHES²:

100	Black
105	Textured Black
106	Matte Black
200	White
206	Matte White
300	Dark Green
307	Emerald Green
311	Jadite
370	Mint
380	Chartreuse
390	Teal
400	Barn Red
420	Orange
470	Watermelon
480	Blush Pink
490	Magenta
495	Sherbet Orange
500	Buttery Yellow
570	Sunflower
600	Bronze
601	Chocolate
605	Rust
615	Oil-Rubbed Bronze
700	Royal Blue
705	Navy
710	Cobalt Blue
715	Delphite Blue
790	Lavender
800	Industrial Grey
805	Charcoal Granite
810	Graphite
975	Galvanized

B - SHADE FINISH (CONTINUED)**NATURAL METALS³:**

995	Raw Copper
996	Weathered Copper
997	Raw Brass
998	Weathered Brass
999	Oil-Rubbed Copper

C - CORDS**CSA LISTED CORD OPTIONS:**

SBK	Standard Black
SWH	Standard White
CSB	Black Cloth
CSW	White Cloth
CSR	Red Cloth
CSBB	Black & Brown Cloth
CSRW	Red & White Cloth
CSGW	Gold & White Cloth
CSBG	Black & Gold Cloth
CSBW	Black & White Cloth
CSBP	Black & Pink Cloth
CSUW	Blue & White Cloth
CMG	Grey Cotton
CRZ	Red Chevron

D - CORD AND CABLE LENGTH

18	18" Cable and Cord
24	24" Cable and Cord
30	30" Cable and Cord
36	36" Cable and Cord
42	42" Cable and Cord

E - CANOPY FINISH

Please Note: See Section B for all applicable Canopy Finish Options

If Porcelain Finish selected, accessory will be powder coat painted-to-match

F - SHADE ACCESSORIES⁴

NA	None
TGG	Heavy Duty Guard
CGG	Cast Guard
WGG	Wire Guard

G - GLASS OPTION⁵

NA	Not Applicable
CLR	Clear Glass
FST	Frosted Glass
RIB	Ribbed Glass
BLU	Blue Glass
RED	Red Glass
AMB	Amber Glass
GRN	Green Glass

H - SHADE ACCESSORY FINISH

Please Note: See Section B for all applicable Finish Options.

(I) If no accessory is selected in Section F, select NA

(II) If Porcelain Finish selected, accessory will be powder coat painted-to-match

(III) Not available in Natural Metals


NA	Not Applicable
-----------	----------------

I - SOCKET TYPE

E26	200 Watt Max
GU24	24 Bi-Pin, 23W Max ^{10,11,12}

IMPORTANT: (1) All Porcelain Enamel finished shades feature a white interior and a black outer rim (2) All Powder Coat finished shades, Galvanized excluded, feature a white interior (3) Natural Metals have a longer estimated manufacturing time, please check the website for exact lead time. There are no returns accepted on Natural Metals (4) Not available in Natural Metals (5) Guard and Glass accessory reduces incandescent wattage to 100W Max and GU24 Bi-Pin to 18W Max (6) Fixtures configured with GU24 socket are non-returnable

MOUNTING DIMENSIONS

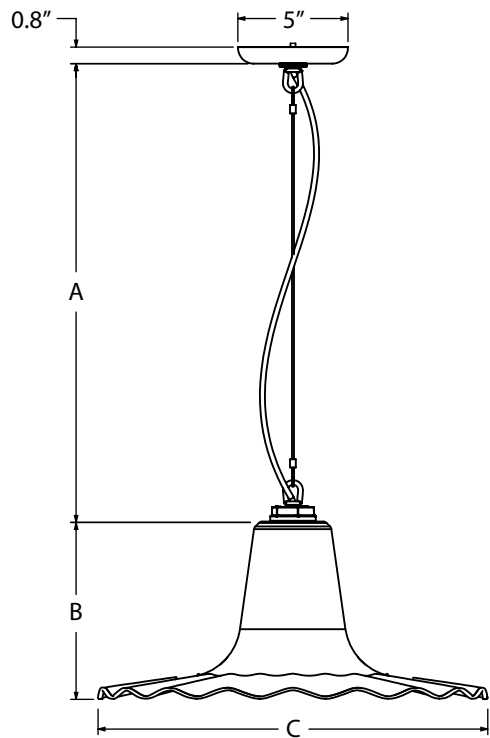

CABLE & CORD	TOTAL LENGTH (A)
18 18" Cable & Cord	20.8"
24 24" Cable & Cord	26.8"
30 30" Cable & Cord	32.8"
36 36" Cable & Cord	38.8"
42 42" Cable & Cord	44.8"

SHADE CODE	HEIGHT (B)	DIAMETER (C)
RWS12	5.75"	12"
RWS14	6.5"	14"
RWS16	7"	16"

SPECIFICATIONS

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA
Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility
Located in Titusville, FL

CSA LISTED FOR DAMP LOCATIONS
ACR is UL Listed for Damp Locations

LIMITED WARRANTY
For Additional Information on Our Limited Warranty, Please See
Our Terms & Conditions

CONSTRUCTION & FINISHES

POWDER COAT SHADE
Hand-Spun from High Purity 3003-O Temper Aluminum

GALVANIZE SHADE
Hand Spun from High Quality Galvanized Steel

PORCELAIN SHADE
Hand-Spun from 20 Gauge Porcelain Steel

COPPER
Hand-Spun from High Purity C11000-O60 ETP Copper

BRASS
Hand-Spun from High Purity C2600-O60 Brass

PORCELAIN FINISHES
Applied by Hand and Fired in a High Temperature Oven

CONSTRUCTION & FINISHES (CONTINUED)

POWDER COAT FINISHES
Polyester Powder Coat Finishes Are Electro-Statically Applied and
Thermocured

STUDIO CABLE
Constructed with 3/32" Galvanized Steel Wire Cable

LIGHT SOURCE

INCANDESCENT
Medium Base E26 Socket, 120 VAC, 200W Max

COMPACT FLUORESCENT
Bi-Pin Base GU24 Socket, 120 VAC, 23W Max