



REV 09.21.18
DINO STUDIO LIGHT
 BARN LIGHT RLM FIXTURE FAMILY
 Max Weight: 10.0 lbs

PROJECT NAME _____

PROJECT TYPE _____

SPS-0362

BLE - C - STU - _____ - _____ - _____ - _____ - _____ - _____ - _____

A B C D E F

_____ - _____

G H

Order Example: BLE - C - STU - WHD12 - 250 - SWH - 30 - NA - NA - NA - GU24

A - SHADE SIZE

DINO:

WHD12 12" Shade
WHD14 14" Shade

B - SHADE FINISH

PORCELAIN FINISHES¹:

150 Black
250 White
350 Vintage Green
355 Jadite
455 Cherry Red
550 Yellow
650 Bronze
750 Cobalt Blue
765 Delphite Blue
850 Graphite
950 Metallic Chrome

C - CORDS

CSA LISTED CORD OPTIONS:

SBK Standard Black
SWH Standard White
CSB Black Cloth
CSW White Cloth
CSR Red Cloth
CSBB Black & Brown Cloth
CSRW Red & White Cloth
CSGW Gold & White Cloth
CSBG Black & Gold Cloth
CSBW Black & White Cloth
CSBP Black & Pink Cloth
CSUW Blue & White Cloth

NON-CSA LISTED CORD OPTIONS:

CBK Black Cotton
CMG Grey Cotton
CRZ Red Chevron

D - CORD AND CABLE LENGTH

18 18" Cable and Cord
24 24" Cable and Cord
30 30" Cable and Cord
36 36" Cable and Cord
42 42" Cable and Cord

E - SHADE ACCESSORIES

NA None
WC Wire Cage
TGG Heavy Duty Guard
CGG Cast Guard
WGG Wire Guard

F - GLASS OPTION

NA Not Applicable
CLR Clear Glass
FST Frosted Glass
RIB Ribbed Glass
CCR Clear Crackle Glass
SMK Smoke Crackle Glass
HCR Honey Crackle Glass

G - SHADE ACCESSORY FINISH

*Please Note: See **Section B** for all applicable Finish Options.
 (I) If no accessory is selected in Section E, select NA
 (II) 975-Galvanized Finish also available
 (III) If Porcelain Finish selected, accessory will be powder coat painted-to-match*


NA Not Applicable
975 Galvanized

H - SOCKET TYPE

E26 200 Watt Max²
GU24 24 Bi-Pin, 23W Max^{2,3}

IMPORTANT: (1) All Porcelain Enamel finished shades feature a white interior and a black outer rim (2) Guard and Glass accessory reduces incandescent wattage to 100W Max and GU24 Bi-Pin to 18W Max (3) Fixtures configured with GU24 socket are non-returnable

DIMENSIONAL DRAWING

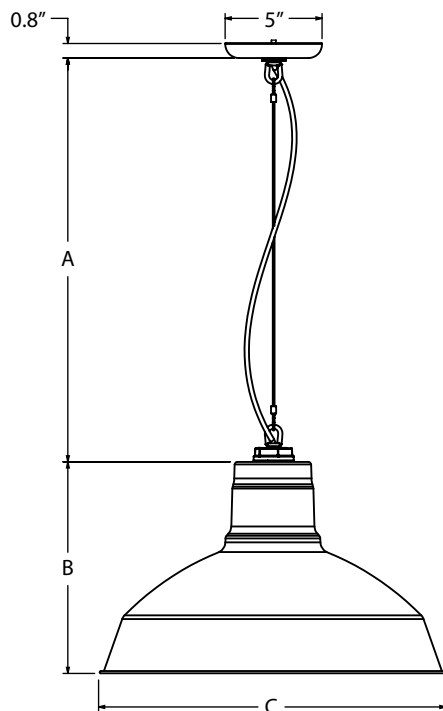

CABLE & CORD	TOTAL LENGTH (A)
18 18" Cable & Cord	20.8"
24 24" Cable & Cord	26.8"
30 30" Cable & Cord	32.8"
36 36" Cable & Cord	38.8"
42 42" Cable & Cord	44.8"

SHADE CODE	HEIGHT (B)	DIAMETER (C)
WHD12	7.75"	12"
WHD14	8.5"	14"

LIGHT SOURCE

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact the factory.

OPTION	WATTAGE	LUMENS <small>*Avg. value, actual value dependent on bulb used</small>	CRI	VOLTAGE	DIMMING
INCANDESCENT (MED E26)					
E26	200W Max	*3000	*100	120 VAC	Bulb Dependant
COMPACT FLOURESCENT (GU24 CFL)					
GU24	23W Max	*1600	*75	120 VAC	Bulb Dependant

SPECIFICATIONS**CERTIFICATIONS, LISTINGS & WARRANTY**

MADE IN THE USA
 Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility
 Located in Titusville, FL

CSA LISTED FOR DAMP LOCATIONS

LIMITED WARRANTY
 For Additional Information on Our Limited Warranty, Please See
 Our Terms & Conditions

SHADE & FINISHES

DINO PORCELAIN SHADE
 Hand-Spun from 20 Gauge Sheet Metal

PORCELAIN FINISHES
 Applied by Hand and Fired in a High Temperature Oven

MOUNTING

STUDIO CABLE
 Constructed with 3/32" Galvanized Steel Wire Cable

CANOPY
 5" Canopy Hand-Spun from 20 Gauge Sheet Metal, Galvanized
 Finish