



REV 09.25.18

### THE CAFÉ FOOD WARMER PENDANT

BARN LIGHT CORD PENDANT COLLECTION

Max Weight: 10.0 lbs

PROJECT NAME \_\_\_\_\_

PROJECT TYPE \_\_\_\_\_

SPS-0261

BLE - C - FW - CAF - \_\_\_\_\_  
  **A**  **B**

Order Example: BLE - C - FW - CAF - 500 - SJTOOW-BK

#### A - FINISHES

*POWDER COAT FINISHES<sup>1</sup>:*


- 100** Black
- 105** Textured Black
- 200** White
- 300** Dark Green
- 307** Emerald Green
- 311** Jadite
- 370** Mint
- 380** Chartreuse
- 390** Teal
- 400** Barn Red
- 420** Orange
- 470** Watermelon
- 480** Blush Pink
- 490** Magenta
- 500** Buttery Yellow
- 570** Sunflower
- 600** Bronze
- 601** Chocolate
- 605** Rust
- 615** Oil-Rubbed Bronze
- 700** Royal Blue
- 705** Navy
- 710** Cobalt Blue
- 715** Delphite Blue
- 800** Industrial Grey
- 805** Charcoal Granite
- 810** Graphite
- 975** Galvanized

#### B - JACKETED CORD

- SJTOOW-BK** Black Jacketed Cord
- SJTOOW-WH** White Jacketed Cord

**IMPORTANT:** (1) All Powder Coat finished shades, excluding 975-Galvanized, feature a white interior

#### DIMENSIONAL DRAWING

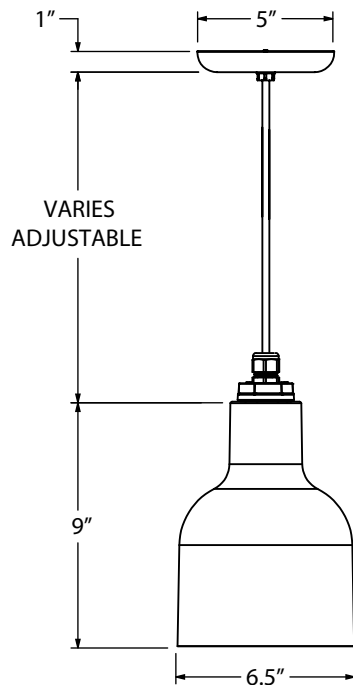

**JACKETED CORD**

Each food warming pendant is equipped with 8’ of jacketed cord - available in black or white - that withstands the heat emitted by the lamp.



**SJTOOW-BK** JACKETED BLACK CORD



**SJTOOW-WH** JACKETED WHITE CORD

**LIGHT SOURCE**

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact the factory.

OPTION	WATTAGE	LUMENS <small>*Avg. value, actual value dependent on bulb used</small>	CRI	VOLTAGE	DIMMING
<b>INCANDESCENT (MED E26)</b>					
<b>E26</b>	250W Max	*1400	*100	120 VAC	Bulb Dependant

**SPECIFICATIONS**

**MOUNTING**

JACKETED CORD  
Pendant Equipped with 8’ of Black or White Jacketed Cord. Canopy Finish Will Match Cord Color Selected.

**SHADE & FINISHES**

CAFÉ SHADE  
Hand-Spun from High Purity 0.050” Thick 3003-O Temper Aluminum

POWDER COAT FINISHES  
Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured

**CERTIFICATIONS, LISTINGS & WARRANTY**

MADE IN THE USA  
Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

LIMITED WARRANTY  
For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions