




JOB NAME: \_\_\_\_\_ FIXTURE TYPE: \_\_\_\_\_




1

MOUNTING STYLE


CORD HUNG PENDANT (C)

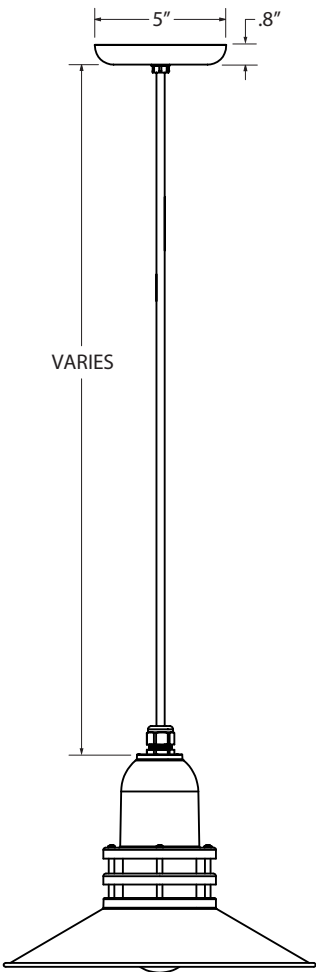


FLUSH MOUNT (F)



STEM MOUNT PENDANT (S)

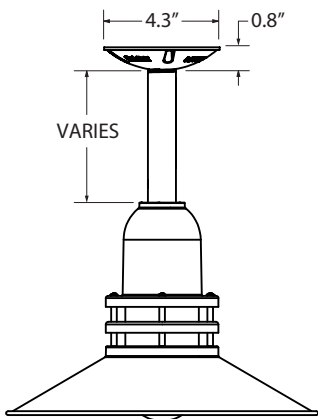


GOOSENECK (G)

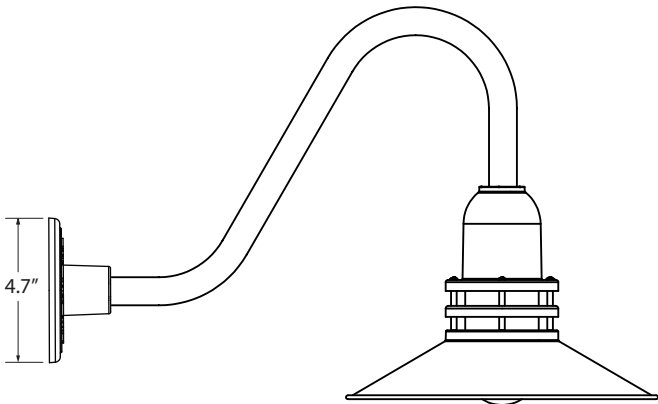

SHOWN WITH: G26 GOOSENECK ARM

LUMINAIRE DIMENSIONS

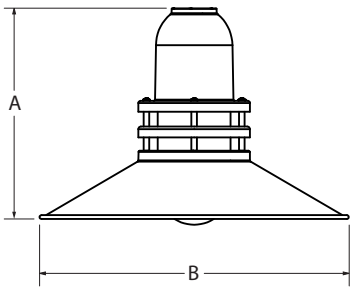

SHADE CODE	HEIGHT (A)	DIAMETER (B)
ULC12	9.5"	12"
ULC14	10"	14"
ULC16	10.75"	16"
ULC18	11.25"	18"

**SPECIFICATIONS****CERTIFICATIONS, LISTINGS & WARRANTY**

## MADE IN THE USA

Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility  
Located in Titusville, FL

## CSA LISTED FOR WET LOCATIONS

Includes All Gooseneck, Stem and Flush Mounting Styles

## CSA LISTED FOR DAMP LOCATIONS

Includes All Chain and Select Cord Hung Mounting Styles

## LIMITED WARRANTY

For Additional Information on Our Limited Warranty, Please See  
Our Terms & Conditions

**LIGHT SOURCE**

## INCANDESCENT

Medium Base E26 Socket, 120 VAC, 100W Max

## COMPACT FLUORESCENT

Bi-Pin Base GU24 Socket, 120 VAC, 18W Max

**CONSTRUCTION & FINISH**

## POWDER COAT SHADE

Hand-Spun from High Purity 3003-O Temper Aluminum

## GALVANIZED SHADE

Hand Spun from High Quality Galvanized Steel

## POWDER COAT FINISHES

Polyester Powder Coat Finishes Are Electro-Statically Applied and  
Thermocured

## COPPER

Hand-Spun from High Purity C11000-O60 ETP Copper

## BRASS

Hand-Spun from High Purity C2600-O60 Brass

## STEM

1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40,  
6063 Aluminum Mounting Stem. Custom Lengths Available upon  
Request.

## GOOSENECK

1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40,  
6063 Aluminum Gooseneck

## CORD

Cord Hung Pendants Include 7', 12' or 20' of Cord, Max Cord Length  
for GU24 is 12FT (Overall Cord Length is Measured from Base of  
Socket and Varies Based on Fixture)

## CHAIN

4-Gauge Chain Complete with Quick Link for On-Site Adjustments  
to Chain's Length