




SPS-0063 REV C

CHESTNUT SERIES

JOB NAME: _____ FIXTURE TYPE: _____



BLE - _____ - _____ - _____ - _____ - _____ - _____ - _____

A **B** **C** **D** **E** **F** **G**

_____ - _____ - _____ - _____

H **I** **J** **K**

Order Example: BLE - C - CLAR12 - 200 - CSGW - 12FT - 200 - WGG - 200 - FST - NA - E26

A - MOUNTING STYLE

C	Cord Hung
F	Flush Mount
G	Gooseneck
S	Stem Mount

B - SHADE SIZE**CHESTNUT:**

CLAR8	8" Shade ¹
CLAR12	12" Shade
CLAR16	16" Shade

C - SHADE FINISH**POWDER COAT FINISHES²:**

100	Black
105	Textured Black
106	Matte Black
200	White
206	Matte White
300	Dark Green
307	Emerald Green
311	Jadite
370	Mint
380	Chartreuse
390	Teal
400	Barn Red
420	Orange
470	Watermelon
480	Blush Pink
490	Magenta
495	Sherbet Orange
500	Buttery Yellow
570	Sunflower
600	Bronze
601	Chocolate
605	Rust
615	Oil-Rubbed Bronze
700	Royal Blue
705	Navy
710	Cobalt Blue
715	Delphite Blue
790	Lavender
800	Industrial Grey
805	Charcoal Granite
810	Graphite
975	Galvanized

D - MOUNTING

Please Note: If Flush Mount [F] is selected in **Section A**, please select **NA**

NA	Not Applicable
-----------	----------------

CSA LISTED CORD OPTIONS:

SBK	Standard Black
SWH	Standard White
CSB	Black Cloth
CSW	White Cloth
CSR	Red Cloth
CSBB	Black & Brown Cloth
CSRW	Red & White Cloth
CSGW	Gold & White Cloth
CSBG	Black & Gold Cloth
CSBW	Black & White Cloth
CSBP	Black & Pink Cloth
CSUW	Blue & White Cloth
CMG	Grey Cotton
CRZ	Red Chevron

NON-CSA LISTED CORD OPTIONS:

TBK	Black Cotton Twist
TWH	White Cotton Twist
TBR	Brown Cotton Twist
TRD	Red Cotton Twist
TPT	Putty Cotton Twist
TBW	Black & White Twist
TRW	Red & White Twist
TBB	Brown & Beige Twist

GOOSENECK OPTIONS:

G1	G16
G2³	G17³
G3⁴	G19³
G4^{3,4}	G22³
G5³	G24³
G6³	G25³
G7³	G26
G8³	G32³
G9³	G34
G10³	G35
G11	G36³
G12	G40³
G13³	G64³
G14³	G65³
G15³	

D - MOUNTING (CONTINUED)**STEM MOUNT OPTIONS:**

ST506	.5" Stem Mount, 6"
ST512	.5" Stem Mount, 12"
ST518	.5" Stem Mount, 18"
ST524	.5" Stem Mount, 24"
ST536	.5" Stem Mount, 36"
ST548	.5" Stem Mount, 48"
ST706	.75" Stem Mount, 6" ³
ST712	.75" Stem Mount, 12" ³
ST718	.75" Stem Mount, 18" ³
ST724	.75" Stem Mount, 24" ³
ST736	.75" Stem Mount, 36" ³
ST748	.75" Stem Mount, 48" ³

E - CORD LENGTH⁵

Please Note: If GU24 is selected in **Section K**, max Cord Length is 12FT

NA	Not Applicable
7FT	7' of Cord
12FT	12' of Cord
20FT	20' of Cord

F - MOUNTING FINISH

Please Note: See **Section C** for Finish Options. 980-Brushed Aluminum also available for Gooseneck (except G36, G40, G64 & G65) and Stem mounting styles.
(I) If Cord Hung [C] or Flush Mount [F] Mounting Style, selection identifies canopy finish
(II) If Stem Mount [S] Mounting Style, selection identifies stem and canopy finish

980	Brushed Aluminum
------------	------------------

G - SHADE ACCESSORIES

NA	None
TGG	Heavy Duty Guard ^{6,7}
CGG	Cast Guard ^{6,7}
WGG	Wire Guard ^{6,7}
WC	Wire Cage

H - SHADE ACCESSORY FINISH

Please Note: Selection only applicable if accessory is selected in **Section G**, select **NA** if no accessory selected. See **Section C** for all Finish Options.

NA	Not Applicable
-----------	----------------

I - GLASS OPTION^{6,7}

NA	Not Applicable
CLR	Clear Glass
FST	Frosted Glass
RIB	Ribbed Glass

J - MOUNTING ACCESSORY

NA	None/Not Applicable
HSC	Hang Straight Canopy ⁸
HDSMC	Heavy Duty Stem Mount Canopy ⁸
HDBP	Heavy Duty Backing Plate ^{9,10}
DD	Dusk-to-Dawn Photocell ^{9,10}
DBPC	Decorative Backing Plate Cover ^{9,10}


K - LIGHT SOURCE

E26	200 Watt Max
GU24	24 Bi-Pin, 23W Max ¹¹


IMPORTANT: (1) Guard and Glass not available (2) All Powder Coat finished shades, Galvanized excluded, feature a white interior (3) Mounting option not available if CLAR8 shade size is selected in Section B (4) Not available with 16" shade size (5) Only applicable if Cord Hung Mounting Style is selected in Section A, select NA if another Mounting Style is selected (6) Guard and Glass accessory reduces incandescent wattage to 100W Max & GU24 Bi-Pin to 18W Max (7) Guard and Glass accessory not applicable if CLAR8 is selected in Section B (8) Selection only applicable if Stem Mount is selected in Section A (9) Selection only applicable if Gooseneck is selected in Section A (10) Not available with G19 & G40 Gooseneck options (11) Fixtures configured with GU24 socket are non-returnable

MOUNTING STYLE


CORD HUNG PENDANT (C)

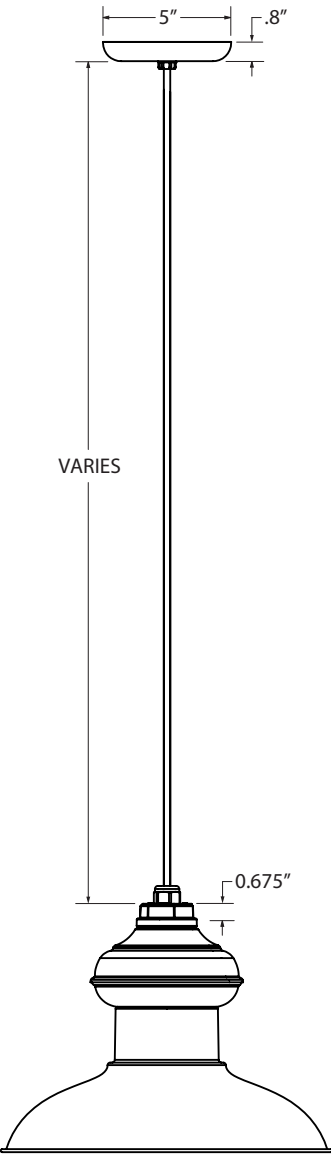


FLUSH MOUNT (F)

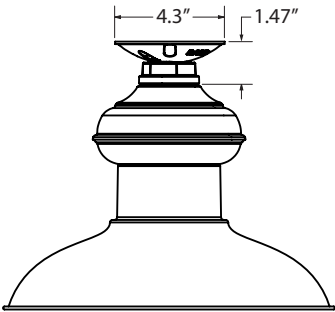


STEM MOUNT PENDANT (S)

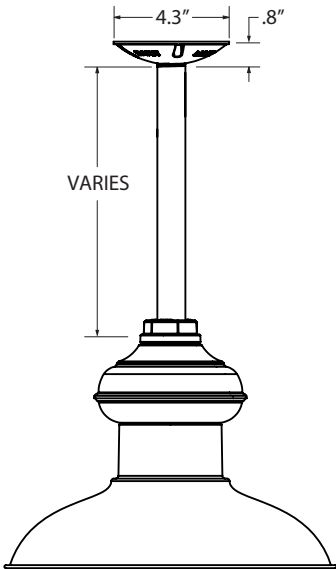

GOOSENECK (G)

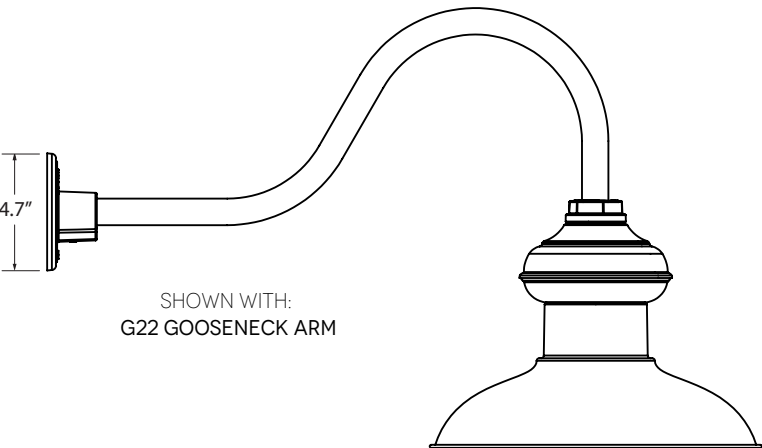

LUMINAIRE DIMENSIONS

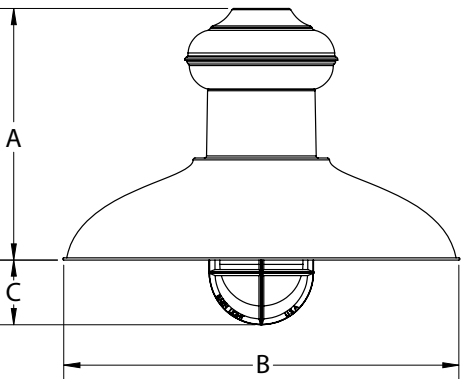

SHADE CODE	HEIGHT (A)	DIAMETER (B)	EXTENSION (C)
CLAR8	6"	8"	N/A
CLAR12	8"	12"	5"
CLAR16	10"	16"	3"

SPECIFICATIONS**CERTIFICATIONS, LISTINGS & WARRANTY**

MADE IN THE USA

Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility
Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS

Includes Flush, Stem and Gooseneck Mounting Styles

CSA LISTED FOR DAMP LOCATIONS

Includes Select Cord Hung Mounting Styles

LIMITED WARRANTY

For Additional Information on Our Limited Warranty, Please See
Our Terms & Conditions

LIGHT SOURCE

INCANDESCENT

Medium Base E26 Socket, 120 VAC, 200W Max

COMPACT FLUORESCENT

Bi-Pin Base GU24 Socket, 120 VAC, 23W Max

CONSTRUCTION & FINISH

POWDER COAT SHADE

Hand-Spun from High Purity 3003-O Temper Aluminum

GALVANIZED SHADE

Hand Spun from High Quality Galvanized Steel

POWDER COAT FINISHES

Polyester Powder Coat Finishes Are Electro-Statically Applied and
Thermocured

STEM

1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40,
6063 Aluminum Mounting Stem. Custom Lengths Available upon
Request.

GOOSENECK

1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40,
6063 Aluminum Gooseneck

CORD

Cord Hung Pendants Include 7', 12' or 20' of Cord, Max Cord Length
for GU24 is 12FT (Overall Cord Length is Measured from Base of
Socket and Varies Based on Fixture)