



REV 10.30.18

THE LED SCHOOLHOUSE COLLECTION

BARN LIGHT SCHOOLHOUSE COLLECTION

Max Weight: 10.0 lbs

PROJECT NAME _____

PROJECT TYPE _____

SPS-0175

BLE - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____

A B C D E F G

_____ - _____ - _____

H I J

Order Example: BLE - G - SCH14 - 500 - G22 - NA - NA - PB3 - 100 - LED16 - 3000K

A - MOUNTING STYLE

C	Cord Hung
CN	Chain Hung ¹
FSF	Semi-Flush Mount
G	Gooseneck
S	Stem Mount

B - GLASS STYLE & SIZE

SCH10	Small, 10" Opaque Glass
SCH14	Large, 14" Opaque Glass
SCHCL10	Small, 10" Clear Glass
SCHCL14	Large, 14" Clear Glass

C - FIXTURE FINISH

(I) If Cord Hung [C] Mounting Style selected, selection identifies fitter and canopy finish

(II) If Chain Hung [CN] Mounting Style selected, selection identifies fitter, chain and canopy finish

(III) If Semi-Flush Mount [FSF] Mounting Style selected, selection identifies fitter and canopy finish

(IV) If Gooseneck [G] Mounting Style selected, selection identifies fitter, gooseneck and wall backing plate finish

(V) If Stem Mount [S] Mounting Style selected, selection identifies fitter, stem and canopy finish

POWDER COAT FINISHES:

100	Black
105	Textured Black
200	White
300	Dark Green
307	Emerald Green
311	Jadite
370	Mint
380	Chartreuse
390	Teal
400	Barn Red
420	Orange
470	Watermelon
480	Blush Pink
490	Magenta
500	Buttery Yellow
570	Sunflower
600	Bronze
601	Chocolate
605	Rust
615	Oil-Rubbed Bronze
700	Royal Blue
705	Navy

C - FIXTURE FINISH (CONTINUED)**POWDER COAT FINISHES:**

710	Cobalt Blue
715	Delphite Blue
800	Industrial Grey
805	Charcoal Granite
810	Graphite
975	Galvanized

NATURAL FINISHES²:

995	Raw Copper
996	Weathered Copper
997	Raw Brass
998	Weathered Brass
999	Oil-Rubbed Copper

D - MOUNTING**CSA LISTED CORD OPTIONS:**

SBK	Standard Black
SWH	Standard White
CSB	Black Cloth
CSW	White Cloth
CSR	Red Cloth
CSBW	Black & White Cloth
CSRW	Red & White Cloth
CSBG	Black & Gold Cloth
CSBP	Black & Pink Cloth
CSGW	Gold & White Cloth
CSUW	Blue & White Cloth
CSBB	Black & Brown Cloth

NON-CSA LISTED CORD OPTIONS:

CBK	Black Cotton
CRZ	Red Chevron
CMG	Grey Cotton
TBW	Black & White Twist
TBK	Black Cotton Twist
TWH	White Cotton Twist
TRW	Red & White Twist
TBR	Brown Cotton Twist
TBB	Brown & Beige Twist
TRD	Red Cotton Twist
TPT	Putty Cotton Twist

CHAIN MOUNT OPTIONS:

CN36	3' of Chain
CN48	4' of Chain
CN60	5' of Chain
CN72	6' of Chain

D - MOUNTING (CONTINUED)**FLUSH MOUNT OPTIONS:****FSF** Semi-Flush Mount**GOOSENECK OPTIONS:**

G1¹	G15
G2¹	G16¹
G3¹	G17
G4	G22
G5	G24
G6	G25
G7	G26¹
G8	G32
G9	G34¹
G10	G35¹
G11¹	G36¹
G12¹	G64¹
G13	G65¹
G14	

STEM MOUNT OPTIONS:

ST503	.5" Stem Mount, 3" ¹
ST506	.5" Stem Mount, 6"
ST512	.5" Stem Mount, 12"
ST518	.5" Stem Mount, 18"
ST524	.5" Stem Mount, 24"
ST536	.5" Stem Mount, 36"
ST548	.5" Stem Mount, 48"

E - CORDS³**NA** Not Applicable**CSA LISTED CORD OPTIONS:**

SBK	CSRW
SWH	CSBG
CSB	CSBP
CSW	CSGW
CSR	CSUW
CSBW	CSBB

NON-CSA LISTED CORD OPTIONS:

CBK	CMG
CRZ	

F - MOUNTING ACCESSORIES

NA	None/Not Applicable
HSC	Hang Straight LED Canopy ⁴

G - PAINTED BAND

NA	No Painted Band
PB1	Single Painted Band
PB2	Double Painted Band
PB3	Triple Painted Band

H - PAINTED BAND FINISH

NA	Not Applicable
100	Black
200	White ⁵
307	Emerald Green
311	Jadite
390	Teal
400	Barn Red
490	Magenta
500	Buttery Yellow
600	Bronze
700	Royal Blue
705	Navy
715	Delphite Blue

I - LIGHT SOURCE

LED11	850 Lumen, 11W LED
LED16	1250 Lumen, 16W LED


J - COLOR TEMPERATURE

2700K	2700K, Warm White
3000K	3000K, Neutral White
3500K	3500K, Bright White
4000K	4000K, Cool White

IMPORTANT: (1) Not available in Natural Finishes (2) Natural Finishes have a longer estimated manufacturing time, please check the website for exact lead time. There are no returns accepted on Natural Finishes. (3) Only applicable if Chain Hung mounting style is selected in Section A and D, select NA if alternative mounting selected (4) Only applicable if Stem Mount mounting style is selected in Section A and D, select NA if alternative mounting selected (5) White Painted Band not recommended if Opaque Glass is selected in Section B


MOUNTING STYLE

CORD HUNG PENDANT (C)

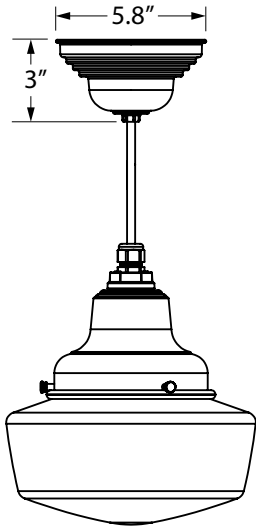


SHOWN WITH: SMALL 10" GLASS

SEMI-FLUSH MOUNT (FSF)

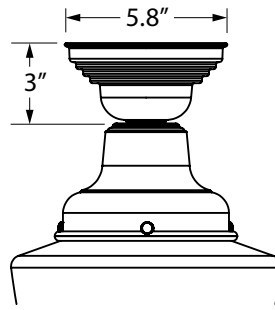


CHAIN HUNG PENDANT (CN)

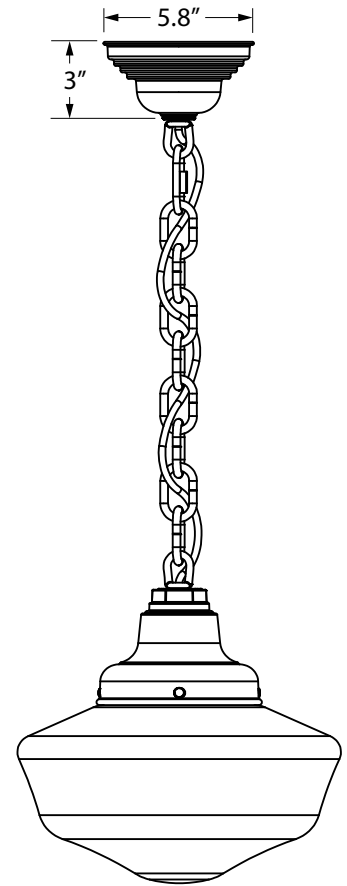

SHOWN WITH: LARGE 14" GLASS


GOOSENECK (G)

SHOWN WITH:
G26 GOOSENECK ARM
LARGE 10" GLASS

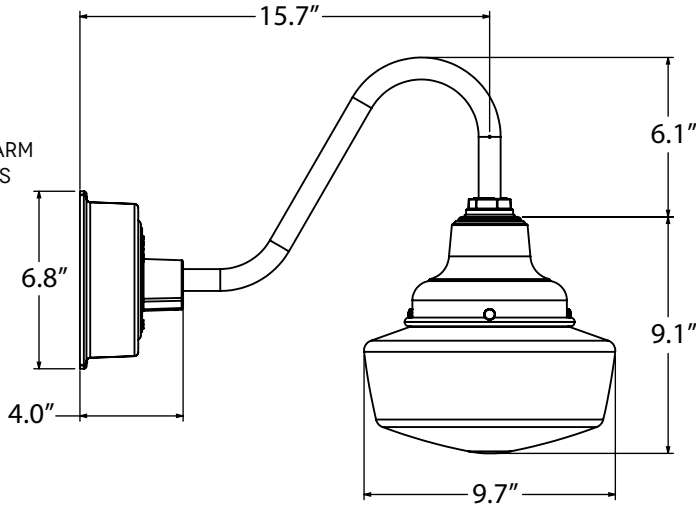


AVAILABLE GLASS SIZES


**SMALL 10" GLASS
(SCHCL10 & SCH10)**

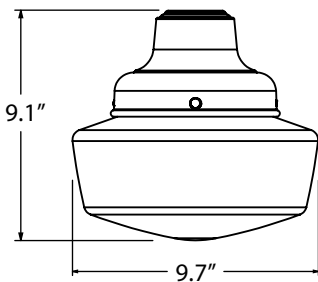

**LARGE 14" GLASS
(SCHCL14 & SCH14)**

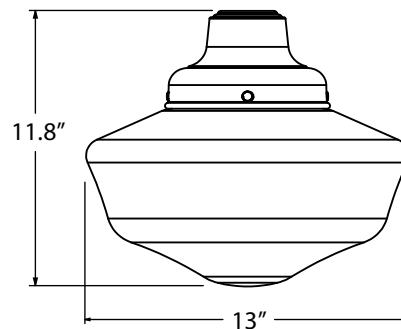

STEM MOUNT PENDANT (S)

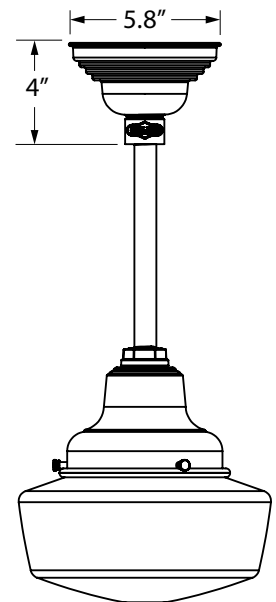

SHOWN WITH: SMALL 10" GLASS

LIGHT SOURCE

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact the factory.

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
LEDS					
LED11	11W	850	>90	120 VAC	TRIAC
LED16	16W	1250	>90	120 VAC	TRIAC

SPECIFICATIONS

MOUNTING

STEM
1/2" Nominal (0.84" Actual), 6063 Aluminum Mounting Stem.
Custom Lengths Available upon Request.

GOOSENECK
1/2" Nominal (0.84" Actual), 6063 Aluminum Gooseneck.

CORD
Cord-hung Pendants Include 7' Of Standard Cord Or 5' Of Cotton Cord, +/- For Socket Orientation

FIXTURE & FINISHES

SCHOOLHOUSE FITTER
Hand-Spun from High Purity 0.050" Thick 3003-O Temper Aluminum

POWDER COAT FINISHES
Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA
Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR DAMP LOCATIONS
Includes All Chain, Semi-Flush Mount, Gooseneck and Stem Mount Styles

CSA LISTED FOR DRY LOCATIONS
Includes Select Cord Hung Mounting Styles

LIMITED WARRANTY
For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions

LED SPECIFICATIONS

LUMEN MAINTENANCE
L70(7K) > 50,000 Hours

COLOR TEMPERATURES
Standard Color Temperatures Available Include 2700K, 3000K, 3500K and 4000K. Custom Temperatures Available upon Request.

CRI
Minimum 90 CRI. Consult Factory for Other CRI Options

EFFICACY
Up to 78 Lumens per Watt

DRIVER & DIMMING OPTION
850 and 1250 Lumen, Reliant on Triac Dimming Only Driver Mounted in Canopy. Dimmable down to 5% Depending on Dimmer. Requires Compatible Dimming Switch.