


Item #	Diameter (A)	Height (B)	
WHD12-PC	12"	7 ¾"	
WHD14-PC	14"	8 ½"	

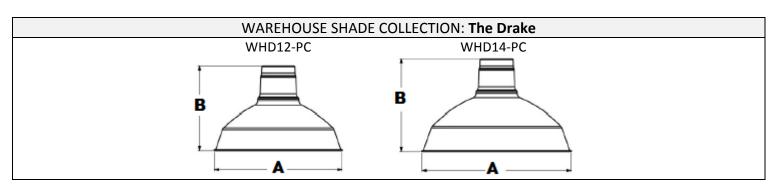

Model #	Item #	Standard	Mounting Options	Mounting Color	Optional	Accessory Colors	Wattage/Lamp	Ballast	Voltage
		Finishes			Accessories		Options		
C - Cord Hung	WHD12-PC	Powder Coat:	Cord:	Standard Finish for ALL	CGG- Cast Guard	Standard Finish for	200 Watt		120V
	WHD14-PC	100 -Black	Standard ¹ :	Mounting is: Same as fixture	and Glass 4	Accessories is: Same as	maximum		
S - Stem		200 -White	SBK Black	// Leave Code Blank		fixture // Leave Code			
Mount		300-Dark Green	SWH White		WGG- Wire Guard	Blank	GU-24 Bi-Pin		
		600-Bronze	Cotton ² :	OR	and Glass ⁴		(Max 23 watt		
G- Goose-		605 - Rust	CRZ Red Chevron			OR	per socket)		
Neck			CGM Grey	Cord:	TGG- Heavy Duty				
		Other:	CBK Black	Canopy color:	Cast Guard and	Powder Coat:			
F - Flush		975- Galvanized	Cotton Twists ² :	100 - Black	Glass ⁴	100 -Black			
Mount			TBR Brown	200 -White		400-Barn Red			
		For additional	TBK Black		WC -Wire	975-Galvanized			
CN- Chain		colors, see color	TPT Putty	Stem and Gooseneck :	Cage				
Hung		chart		100 - Black		For additional colors,			
			Stem:	200 - White	HSC -Hang Straight	see color chart			
			ST	975- Galvanized	Canopy				
			^Specify stem model	980- Brushed		Vapor Proof Glass ⁴ :			
			Gooseneck:	Aluminum	HDSM- Heavy Duty	CLR- Clear			
			G		Stem Mount	FST- Frosted			
			^Specify gooseneck model	Chain :	Canopy	RIB- Ribbed			
				Chain & Canopy color:					
			Flush Mount:	100 - Black	HDBP- Heavy Duty	For additional glass			
			FM	200 - White	Backing Plate	options, see guard and			
			2	975- Galvanized		glass chart			
			Chain Hung ³ :						
			CN	For additional colors, see					
			Standard length is 3 ft.	color chart					
			For additional mounting options and						
			details, see mounting option chart						
BLE-C	WHD14-PC	100	SBK		CGG	100-FST			
				ORDER SPECIFICS					
BLE-	-PC								

¹Suitable for Damp locations. Standard length 8 feet. ²Suitable for Dry locations Only (Not CSA listed). Standard length 6 feet. ³Standard length is 3ft. *Additional lengths available on Cord, Stem & Chain ⁴Guard/Glass options reduce wattage to 100W & GU-24 Bi-Pin to 18W. **Suitable for Wet Location (except when cord mounted)**