

3000 SERIES

FLUSH MOUNTING

LEXAN® HOUSING

PHOTOCONTROL

APPLICATIONS



- Pole lanterns
- Lawn lighting
- Walkways

Flush Mounting
Model 3010

FEATURES

OPERATION: Delay up to two minutes to prevent false switching due to light from passing vehicles, lightning, etc.

HOUSING & MOUNTING: Control housing is weather-resistant molded Lexan® with ultrasonically welded seams.

MODEL 3000: Flush mounting through .6875" hole in post lantern or lighting fixture, 3/8" NPT, stem 3/4" long. Gasket and nut supplied.

MODEL 3010: flush mounting into standard, raintight junction box. Includes plate and gasket to fit FS type outdoor junction box.

ENERGY SAVINGS: Works with screw base CFLs and LED lamps.

ORDERING INFO

CATALOG NO.	UPC CODE	VOLTAGE 50-60Hz
3000	60020	120
3002	60019	208-277
3006*	60026	347
3010	60021	120

*CSA certified only.

SPECIFICATIONS

ON/OFF: Turn ON is 1 to 5fc. Turn OFF is 3 to 15fc.

TIME DELAY: ON and OFF.

CELL: Cadmium sulphide, epoxy-coated, 1/2" diameter.

CONTACTS: Normally closed (the unit fails in the ON position).

LEAD WIRES: Three color coded, minimum 6" wire leads, #16AWG, rated for 105°C.

POWER CONSUMPTION:
Averages under 1 watt.

TEMPERATURE RANGE:
-40° to +140°F (-40° to +60°C).

FAIL MODE: ON.


WARRANTY: 5 years.

CONTACT RATINGS

CATALOG NO.	SWITCH	RATING	
		TUNGSTEN	BALLAST
3000	SPST	2000W	1800VA
3002	SPST	3470-4620W	2080-2770VA
3006*	SPST	1500W	1200VA
3010	SPST	2000W	1800VA

WIRING DIAGRAMS

120V
MODEL

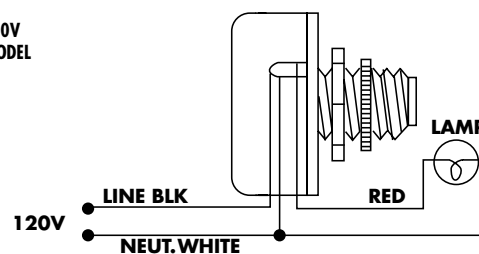

208-277V
MODEL

