



REV 10.03.18

DISTRICT/DOMINION SERIES

BARN LIGHT RLM FIXTURE FAMILY

Max Weight: 10.0 lbs

PROJECT NAME _____

PROJECT TYPE _____

SPS-0152



Order Example: BLE - F - SBD14 - 307 - FM - 307 - NA - TGG - 307 - HCR - NA - LED16.8 - 2700K - NA


A - MOUNTING STYLE	C - SHADE FINISH (CONTINUED)	D - MOUNTING (CONTINUED)	H - GLASS OPTION
C Cord Hung F Flush Mount G Gooseneck S Stem Mount	PORCELAIN FINISHES²: 750 Cobalt Blue 765 Delphite Blue 850 Graphite 950 Metallic Chrome	GOOSENECK OPTIONS: G13 G64 G14 G65 G15 STEM MOUNT OPTIONS: ST506 .5" Stem Mount, 6" ST512 .5" Stem Mount, 12" ST518 .5" Stem Mount, 18" ST524 .5" Stem Mount, 24" ST536 .5" Stem Mount, 36" ST548 .5" Stem Mount, 48" ST706 .75" Stem Mount, 6" ST712 .75" Stem Mount, 12" ST718 .75" Stem Mount, 18" ST724 .75" Stem Mount, 24" ST736 .75" Stem Mount, 36" ST748 .75" Stem Mount, 48"	NA Not Applicable CLR Clear Glass ^{4,7} FST Frosted Glass ⁴ RIB Ribbed Glass ⁴ CCR Clear Crackle Glass ⁴ SMK Smoke Crackle Glass ⁴ HCR Honey Crackle Glass ⁴
B - SHADE SIZE	D - MOUNTING	E - MOUNTING FINISH	I - MOUNTING ACCESSORY
DISTRICT/DOMINION: SBD12 SBD14 SBD16	CSA LISTED CORD OPTIONS: SBK Standard Black SWH Standard White CSB Black Cloth CSW White Cloth CSR Red Cloth CSBB Black & Brown Cloth CSRW Red & White Cloth CSGW Gold & White Cloth CSBG Black & Gold Cloth CSBW Black & White Cloth CSBP Black & Pink Cloth CSUW Blue & White Cloth	<p>Please Note: See Section C for Finish Options. 980-Brushed Aluminum is also available for Gooseneck and Stem mounting styles. If Porcelain Finish is selected, mounting will be powder coat painted-to-match. (I) If Cord Hung [C] or Flush Mount [F] Mounting Style, selection identifies canopy finish (II) If Chain Hung [CN] Mounting Style, selection identifies chain and canopy finish (III) If Stem Mount [S] Mounting Style, selection identifies stem and canopy finish 980 Brushed Aluminum </p>	NA None/Not Applicable HSC Hang Straight Canopy ⁹ HDSMC Heavy Duty Stem Mount Canopy ³ HDBP Heavy Duty Backing Plate ³ DD Dusk-to-Dawn Photocell ³ DBPC Decorative Backing Plate Cover LDBPC LED Decorative Backing Plate Cover
C - SHADE FINISH	NON-CSA LISTED CORD OPTIONS:	F - SHADE ACCESSORIES	J - LIGHT SOURCE
POWDER COAT FINISHES¹: 100 Black 105 Textured Black 200 White 300 Dark Green 307 Emerald Green 311 Jadite 370 Mint 380 Chartreuse 390 Teal 400 Barn Red 420 Orange 470 Watermelon 480 Blush Pink 490 Magenta 500 Buttery Yellow 570 Sunflower 600 Bronze 601 Chocolate 605 Rust 615 Oil-Rubbed Bronze 700 Royal Blue 705 Navy 710 Cobalt Blue 715 Delphite Blue 800 Industrial Grey 805 Charcoal Granite 810 Graphite 975 Galvanized	FLUSH MOUNT OPTIONS: FM GOOSENECK OPTIONS: G1 G16 G2 G17 G3 G19³ G4 G22 G5 G24 G6 G25 G7 G26 G8 G32 G9 G34 G10 G35 G11 G36 G12 G40³	NA None TGG Heavy Duty Guard ⁴ CGG Cast Guard ⁴ WGG Wire Guard ⁴	E26 200 Watt Max ⁴ GU24 24 Bi-Pin, 23W Max ⁴ LED11 850 Lumen, 11W LED ⁵ LED16 1250 Lumen, 16W LED ⁵ LED16.8 1600 Lumen, 16W LED ⁴ LED27 2000 Lumen, 27W LED ⁵ LED38 3000 Lumen, 38W LED ⁵ LED43 4000 Lumen, 43W LED ⁵
PORCELAIN FINISHES²: 150 Black 250 White 350 Vintage Green 355 Jadite 455 Cherry Red 550 Yellow 650 Bronze	K - COLOR TEMPERATURE⁶ NA Not Applicable 2700K 2700K, Warm White 3000K 3000K, Neutral White 3500K 3500K, Bright White 4000K 4000K, Cool White	G - SHADE ACCESSORY FINISH <p>Please Note: See Section C for Finish Options. Natural Finishes not applicable with Wire Cage or Guard. If Porcelain Finish is selected, accessory will be powder coat painted-to-match NA Not Applicable </p>	L - LED LENS^{6,8} NA Not Applicable DL Domed Lens FL Flat Lens

IMPORTANT: (1) All Powder Coat finished shades, Galvanized excluded, feature a white interior (2) All Porcelain Enamel finished shades feature a white interior and a black outer rim (3) Not available in LED (4) Guard and Glass accessory reduces incandescent wattage to 100W Max, GU24 Bi-Pin to 18W Max and LED Max to 1600 Lumens (5) Not available with the Guard & Glass Accessory (6) Only applicable if an LED Light Source is selected in Section J, select NA if another light source is selected (7) Not recommended if LED Light Source is selected in Section J (8) Not applicable if LED16.8 Light Source selected in Section J (9) Only applicable if Stem Mounting Style selected in Section A


MOUNTING STYLE

Galvanized steel shades are crafted from 20 Ga Sheet metal while 1100-0 Aluminum—ranging from ranging from 0.050" to 0.125"—is used for all other shades. All shades have their edges rolled, and the result is highly durable and stylish lighting.


CHAIN HUNG PENDANT (CN)

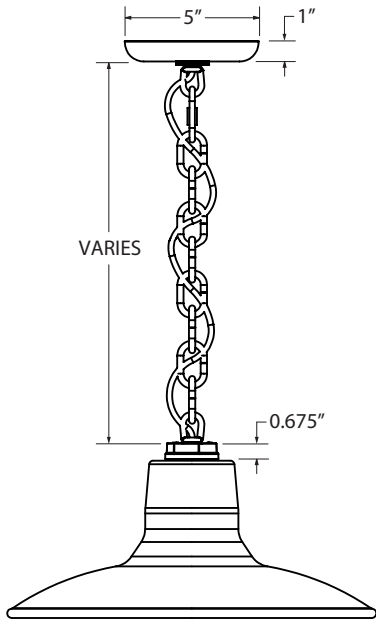


FLUSH MOUNT (F)

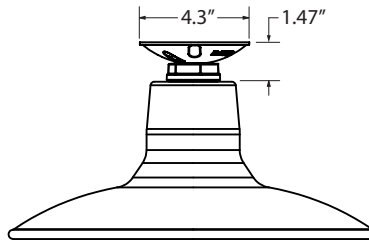


STEM MOUNT PENDANT (S)

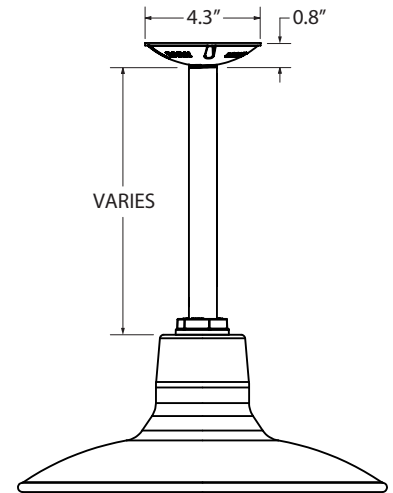

CORD HUNG PENDANT (C)

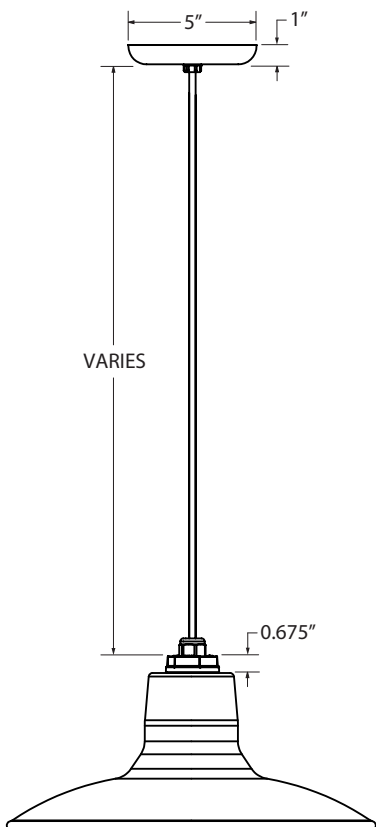


GOOSENECK (G)

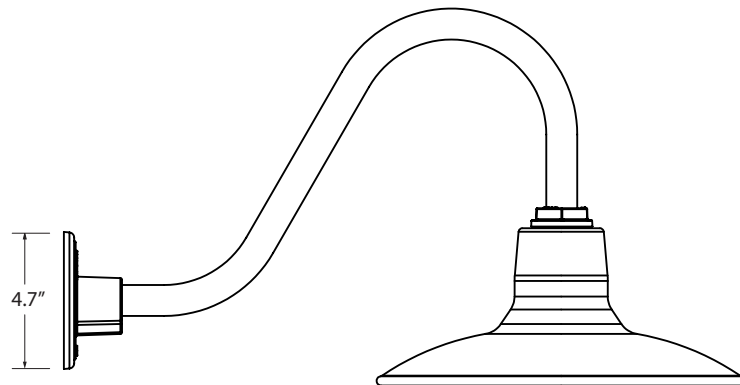

SHOWN WITH: G15 GOOSENECK ARM

AVAILABLE SHADE SIZES

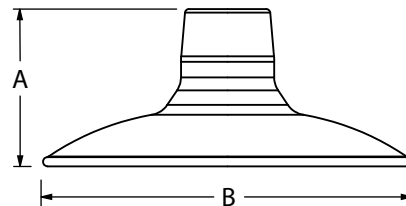

SHADE CODE	HEIGHT (A)	DIAMETER (B)
SBD12	5.25"	12"
SBD14	6"	14"
SBD16	6.75"	16"

LIGHT SOURCE

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact the factory.

OPTION	WATTAGE	LUMENS <small>*Avg. value, actual value dependent on bulb used</small>	CRI	VOLTAGE	DIMMING
LEDS					
LED11	11W	850	>90	120 VAC	TRIAC
LED16	16W	1250	>90	120 VAC	TRIAC
LED16.8	16W	1600	>90	120 VAC	TRIAC
LED27	27W	2000	>90	120-277 VAC	0-10V
LED38	38W	3000	>90	120-277 VAC	0-10V
LED43	43W	4000	>90	120-277 VAC	0-10V
INCANDESCENT (MED E26)					
E26	200W Max	*3000	*100	120 VAC	Bulb Dependant
COMPACT FLOURESCENT (GU24 CFL)					
GU24	23W Max	*1600	*75	120 VAC	Bulb Dependant

SPECIFICATIONS

MOUNTING

SHADE & FINISHES

STEM
1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Mounting Stem. Custom Lengths Available Upon Request.

GOOSENECK
1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Gooseneck.

CORD
Cord-hung Pendants Include 7' Of Standard Cord Or 5' Of Cotton Cord, +/- For Socket Orientation

DISTRICT SHADE
Hand-Spun from High Purity 0.050" Thick 3003-O Temper Aluminum

DOMINION PORCELAIN SHADE
Hand-Spun from 20 Guage Sheet Metal.

POWDER COAT FINISHES
Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured

PORCELAIN FINISHES
Applied by Hand and Fired in a High Temperature Oven

LED SPECIFICATIONS

CERTIFICATIONS, LISTINGS & WARRANTY

LUMEN MAINTENANCE
L90(6K) > 36,300 Hours, LED16.8 Source is L90(11K) > 61,000 Hours.

COLOR TEMPERATURES
Standard Color Temperatures Available Include 2700K, 3000K, 3500K and 4000K. Custom Temperatures Available upon Request.

CRI
Minimum 90 CRI. Consult Factory for Other CRI Options.

EFFICACY
Up to 100 LPW Based on Wattage/Lumens in the Table

DRIVER & DIMMING OPTION
850 and 1250 Lumen, Relient on Triac Dimming 12W / 120V Mounted in Canopy, up to 5% Dimming.
2000, 3000 & 4000 Lumen Reliant on 0-10V Dimmer, Generally up to 10% Dimming.
Requires Compatible Dimming Switch.

MADE IN THE USA
Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS
Includes All Stem and Gooseneck Mounting Styles

CSA LISTED FOR DAMP LOCATIONS
Includes All Chain and Select Cord Hung Mounting Styles

LIMITED WARRANTY
For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions