



REV 10.12.18
THE POLLOCK SERIES
 BARN LIGHT PORCELAIN PENDANT FAMILY
 Max Weight: 10.0 lbs

PROJECT NAME _____
 PROJECT TYPE _____

SPS-0102

BLE - C - _____ - _____ - _____ - _____
 A **B** **C** **D**

Order Example: BLE - C - DBW10 - 1003 - SBK - E26

A - SHADE SIZE		B - SHADE STYLE		B - SHADE STYLE (CONTINUED)		C - CORDS	
DBW8	8" Shade	<i>THE POLLOCK NO. 01:</i>		<i>THE POLLOCK NO. 08:</i>		SBK	Standard Black Cord
DBW10	10" Shade	1001		1008		SWH	Standard White Cord
DBW12	12" Shade	<i>THE POLLOCK NO. 02:</i>		<i>THE POLLOCK NO. 09:</i>			
		1002		1009			
		<i>THE POLLOCK NO. 03:</i>		<i>THE POLLOCK NO. 11:</i>			
		1003		1011			
		<i>THE POLLOCK NO. 04:</i>		<i>THE POLLOCK NO. 12:</i>			
		1004		1012			
		<i>THE POLLOCK NO. 05:</i>		<i>THE POLLOCK NO. 13:</i>			
		1005		1013			
		<i>THE POLLOCK NO. 06:</i>		<i>THE POLLOCK NO. 14:</i>			
		1006		1014			
		<i>THE POLLOCK NO. 07:</i>					
		1007					

D - SOCKET TYPE


E26 200 Watt Max
GU24 24 Bi-Pin, 23 Watt Max¹

IMPORTANT: (1) Fixtures configured with GU24 socket are non-returnable

DIMENSIONAL DRAWING

Galvanized steel shades are crafted from 20 Ga Sheet metal. All shades have their edges rolled, and the result is highly durable and stylish lighting.

CORD HUNG PENDANT (C)

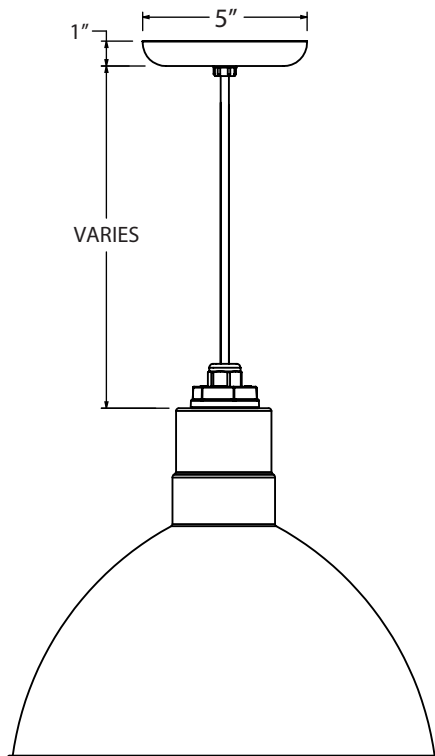

AVAILABLE SHADE SIZES		
	A	B
SHADE CODE	HEIGHT (A)	DIAMETER (B)
DBW8	8.25"	8"
DBW10	9"	10"
DBW12	9.75"	12"

LIGHT SOURCE

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact the factory.

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
INCANDESCENT (MED E26)					
E26	200W Max	1400	100	120 VAC	Bulb Dependant
COMPACT FLOURESCENT (GU24 CFL)					
GU24	23W Max	1400	75	120 VAC	Bulb Dependant

SPECIFICATIONS

SHADE & FINISHES

POLLOCK SHADE
Hand-Spun from 20 Guage Sheet Metal

PORCELAIN FINISHES
Applied by Hand and Fired in a High Temperature Oven

MOUNTING

CORD
Cord-hung Pendants Include 7' Of Standard Cord Or 5' Of Cotton Cord, +/- For Socket Orientation

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA
Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, Fl

CSA LISTED FOR DAMP LOCATIONS

LIMITED WARRANTY
For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions