

Order Example: BLE - S - ULA16 - 600 - ST512 - 975 - NA - CAP - 975 - CLR - HSC - E26 - NA


<p>A - MOUNTING STYLE</p> <p>C Cord Hung CN Chain Hung F Flush Mount G Gooseneck S Stem Mount</p> <hr/> <p>B - SHADE & SHADE SIZE</p> <p><i>THE WALLABY:</i> ULA12 12" Shade ULA14 14" Shade ULA16 16" Shade</p> <hr/> <p>C - SHADE FINISH</p> <p><i>POWDER COAT FINISHES¹:</i></p> <p>100 Black 105 Textured Black 200 White 300 Dark Green 307 Emerald Green 311 Jadite 370 Mint 380 Chartreuse 390 Teal 400 Barn Red 420 Orange 470 Watermelon 480 Blush Pink 490 Magenta 500 Buttery Yellow 570 Sunflower 600 Bronze 601 Chocolate 605 Rust 615 Oil-Rubbed Bronze 700 Royal Blue 705 Navy 710 Cobalt Blue 715 Delphite Blue 800 Industrial Grey 805 Charcoal Granite 810 Graphite 975 Galvanized</p> <p><i>NATURAL FINISHES²:</i></p> <p>995 Raw Copper 996 Weathered Copper 997 Raw Brass 998 Weathered Brass 999 Oil-Rubbed Copper</p>	<p>D - MOUNTING</p> <p><i>CSA LISTED CORD OPTIONS:</i></p> <p>SBK Standard Black SWH Standard White CSB Black Cloth CSW White Cloth CSR Red Cloth CSBB Black & Brown Cloth CSRW Red & White Cloth CSGW Gold & White Cloth CSBG Black & Gold Cloth CSBW Black & White Cloth CSBP Black & Pink Cloth CSUW Blue & White Cloth</p> <p><i>NON-CSA LISTED CORD OPTIONS:</i></p> <p>CBK Black Cotton CMG Grey Cotton CRZ Red Chevron TBK Black Cotton Twist³ TWH White Cotton Twist³ TBR Brown Cotton Twist³ TRD Red Cotton Twist³ TPT Putty Cotton Twist³ TBW Black & White Twist³ TRW Red & White Twist³ TBB Brown & Beige Twist³</p> <p><i>CHAIN MOUNT OPTIONS:</i></p> <p>CN36 3' of Chain⁴ CN48 4' of Chain⁴ CN60 5' of Chain⁴ CN72 6' of Chain⁴</p> <p><i>FLUSH MOUNT OPTIONS:</i></p> <p>FM⁴</p> <p><i>GOOSENECK OPTIONS:</i></p> <table border="0"> <tr><td>G1⁴</td><td>G16⁴</td></tr> <tr><td>G2⁴</td><td>G17</td></tr> <tr><td>G3⁴</td><td>G19⁴</td></tr> <tr><td>G4</td><td>G22</td></tr> <tr><td>G5⁴</td><td>G24</td></tr> <tr><td>G6⁴</td><td>G25</td></tr> <tr><td>G7</td><td>G26⁴</td></tr> <tr><td>G8</td><td>G32</td></tr> <tr><td>G9</td><td>G34⁴</td></tr> <tr><td>G10</td><td>G35⁴</td></tr> <tr><td>G11⁴</td><td>G36⁴</td></tr> <tr><td>G12⁴</td><td>G40⁴</td></tr> <tr><td>G13</td><td>G64⁴</td></tr> <tr><td>G14</td><td>G65⁴</td></tr> <tr><td>G15</td><td></td></tr> </table>	G1⁴	G16⁴	G2⁴	G17	G3⁴	G19⁴	G4	G22	G5⁴	G24	G6⁴	G25	G7	G26⁴	G8	G32	G9	G34⁴	G10	G35⁴	G11⁴	G36⁴	G12⁴	G40⁴	G13	G64⁴	G14	G65⁴	G15		<p>D - MOUNTING (CONTINUED)</p> <p><i>STEM MOUNT OPTIONS:</i></p> <p>ST506 .5" Stem Mount, 6" ST512 .5" Stem Mount, 12" ST518 .5" Stem Mount, 18" ST524 .5" Stem Mount, 24" ST536 .5" Stem Mount, 36" ST548 .5" Stem Mount, 48" ST706 .75" Stem Mount, 6" ST712 .75" Stem Mount, 12" ST718 .75" Stem Mount, 18" ST724 .75" Stem Mount, 24" ST736 .75" Stem Mount, 36" ST748 .75" Stem Mount, 48"</p> <hr/> <p>E - MOUNTING FINISH</p> <p><i>Please Note: See Section C for all applicable Mounting Finish Options</i> <i>(I) If Cord Hung [C] Mounting Style, selection identifies canopy finish</i> <i>(II) If Flush Mount [F] Mounting Style, select NA</i> <i>(III) If Stem Mount [S] Mounting Style, selection identifies stem and canopy finish</i> <i>(IV) If Chain Hung [CN] Mounting Style, selection identifies chain and canopy finish. Natural finishes not available.</i> <i>(V) If Gooseneck [G] Mounting Style, selection identifies gooseneck and wall backing plate finish</i></p> <p>NA Not Applicable</p> <hr/> <p>F - CORDS⁵</p> <p><i>Please Note: See Section D for all applicable CSA Listed Cord Options. Non-CSA Listed Cord Options for Chain Hung Mounting Style limited to: Black Cotton [CBK], Red Chevron [CRZ] and Grey Cotton [CMG]</i></p> <p>NA Not Applicable</p> <hr/> <p>G - CAP OPTION⁶</p> <p>NA No Cap/Not Applicable CAP Cap^{6,7}</p>	<p>H - CAST GUARD FINISH</p> <p><i>Please Note: See Section C for all applicable Cast Guard Finish Options</i> <i>(I) Cast Gaurd not available in Natural Finishes</i></p> <hr/> <p>I - GLASS OPTION</p> <p>CLR Clear Glass⁸ FST Frosted Glass RIB Ribbed Glass CCR Clear Crackle Glass SMK Smoke Crackle Glass HCR Honey Crackle Glass</p> <hr/> <p>J - MOUNTING ACCESSORY</p> <p>NA None/Not Applicable HSC Hang Straight Canopy^{4,9} HDSMC Heavy Duty Stem Mount Canopy¹ HDBP Heavy Duty Backing Plate^{4,10} DD Dusk-to-Dawn Photocell³ DBPC Decorative Backing Plate Cover DCHX Decorative Backing Plate Cover & Hex Cover DCC Decorative Canopy Cover^{9,11}</p> <hr/> <p>K - LIGHT SOURCE</p> <p>E26 100 Watt Max GU24 GU24 Bi-Pin, 18W Max¹² LED16.8 16.8W LED, 1600 Lumen</p> <hr/> <p>L - COLOR TEMPERATURE¹³</p> <p>NA Not Applicable 2700K 2700K, Warm White 3000K 3000K, Neutral White 3500K 3500K, Bright White 4000K 4000K, Cool White</p>
G1⁴	G16⁴																																
G2⁴	G17																																
G3⁴	G19⁴																																
G4	G22																																
G5⁴	G24																																
G6⁴	G25																																
G7	G26⁴																																
G8	G32																																
G9	G34⁴																																
G10	G35⁴																																
G11⁴	G36⁴																																
G12⁴	G40⁴																																
G13	G64⁴																																
G14	G65⁴																																
G15																																	

IMPORTANT: (1) All Powder Coat finished shades, Galvanized excluded, feature a white interior (2) Natural Finishes have a longer estimated manufacturing time, please check the website for exact lead time. There are no returns accepted on Natural Finishes (3) Not available in LED (4) Not available in Natural Finishes (5) Only applicable if Chain Hung Mounting Style is selected in Section A (6) Cap not available if Chain Hung mounting style is selected in Section A (7) Cap Finish will match shade finish selected in Section C (8) Clear Glass not recommended if LED Light Source is selected in Section K (9) Only applicable if Stem Mounting Style selected in Section A (10) Not available in LED (11) Only available if Natural Finish is selected in Section C (12) Fixtures configured with a GU24 socket are non-returnable (13) Only applicable if LED16.8 Light Source is selected in Section J, select NA is non-LED source selected


MOUNTING STYLE

Galvanized steel shades are crafted from 20 Ga Sheet metal while 1100-0 Aluminum—ranging from 0.050" to 0.125"—is used for all other shades. All shades have their edges rolled, and the result is highly durable and stylish lighting.


CHAIN HUNG PENDANT (CN)

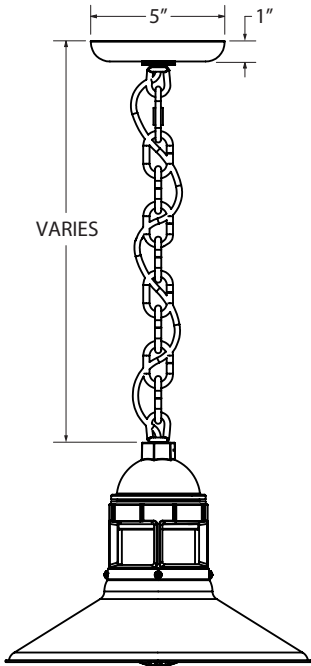


CORD HUNG PENDANT (C)

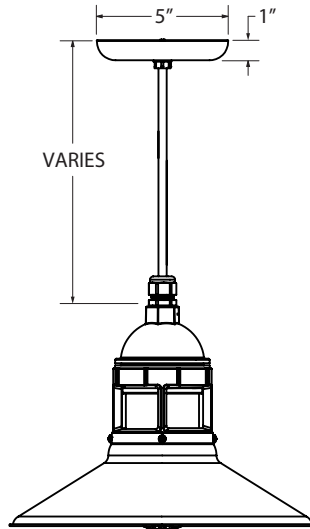


STEM MOUNT PENDANT (S)

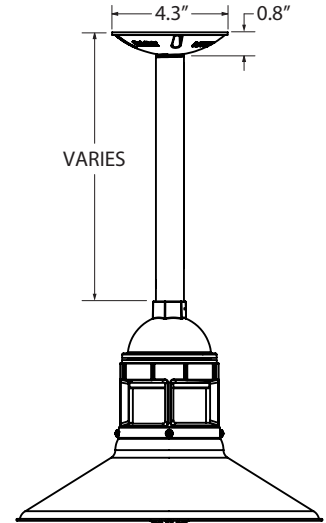

FLUSH MOUNT (F)




GOOSENECK (G)

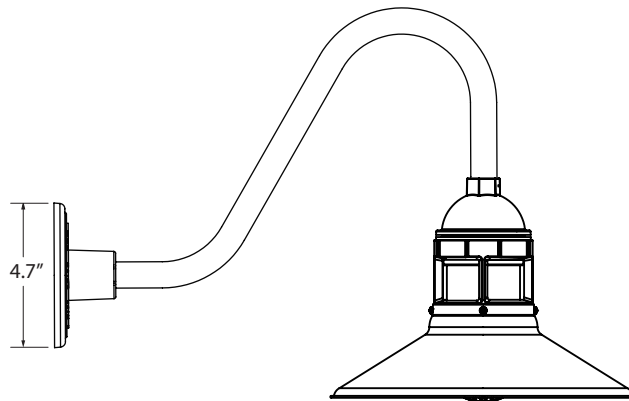


SHOWN WITH: G26 GOOSENECK ARM

AVAILABLE SHADE SIZES



SHADE CODE	HEIGHT (A)	DIAMETER (B)
ULA12	9.3"	12"
ULA14	10"	14"
ULA16	10.8"	16"



LIGHT SOURCE

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact the factory.

OPTION	WATTAGE	LUMENS <small>*Avg. value, actual value dependent on bulb used</small>	CRI	VOLTAGE	DIMMING
INCANDESCENT (MED E26)					
E26	100W Max	1400*	100	120 VAC	Bulb Dependant
COMPACT FLOURESCENT (GU24 CFL)					
GU24	18W Max	1400*	75	120 VAC	Bulb Dependant
LED					
LED16.8	16.8W	1600	>90	120 VAC	TRIAC

SPECIFICATIONS

MOUNTING

STEM
1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Mounting Stem. Custom Lengths Available upon Request.

GOOSENECK
1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Gooseneck

CORD
Cord-hung Pendants Include 7' Of Standard Cord Or 5' Of Cotton Cord, +/- For Socket Orientation

SHADE & FINISHES

WALLABY SHADE
Hand-Spun from High Purity 0.050" Thick 3003-O Temper Aluminum

POWDER COAT FINISHES
Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA
Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS
Includes all Stem and Gooseneck Mounting Styles

CSA LISTED FOR DAMP LOCATIONS
Includes all Chain and Select Cord Hung Mounting Styles

LIMITED WARRANTY
For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions

LED SPECIFICATIONS

LUMEN MAINTENANCE
LED16.8 Source is L90(11K) > 61,000 Hours.

COLOR TEMPERATURES
Standard Color Temperatures Available Include 2700K, 3000K, 3500K and 4000K. Custom Temperatures Available upon Request.

CRI
Minimum 90 CRI. Consult Factory for Other CRI Options.

EFFICACY
Delivers over 95 Lumens Per Watt

DRIVER & DIMMING OPTION
Reliant on Triac Dimming 16.8W / 120V, Dimmable down to 1% Depending on Dimmer. Requires Compatible Dimming Switch.