




SPS-0323 REV B

WESCO UPLIGHT

JOB NAME: _____ FIXTURE TYPE: _____



BLE -	-	-	-	-	-	-
A	B	C	D	E	F	
G	H	I	J			

Order Example: BLE - C - ULW18 - 600 - CSBW - 600 - NA - WC - 600 - NA - GU24

A - MOUNTING STYLE

C	Cord Hung
CN	Chain Hung
F	Flush Mount
G	Gooseneck
S	Stem Mount

B - SHADE SIZE**WILCOX UPLIGHT:**

ULW12	12" Shade
ULW14	14" Shade
ULW16	16" Shade
ULW18	18" Shade
ULW20	20" Shade

C - SHADE FINISH**POWDER COAT FINISHES¹:**

100	Black
105	Textured Black
200	White
300	Dark Green
307	Emerald Green
311	Jadite
370	Mint
380	Chartreuse
390	Teal
400	Barn Red
420	Orange
470	Watermelon
480	Blush Pink
490	Magenta
495	Sherbet Orange
500	Buttery Yellow
570	Sunflower
600	Bronze
601	Chocolate
605	Rust
615	Oil-Rubbed Bronze
700	Royal Blue
705	Navy
710	Cobalt Blue
715	Delphite Blue
790	Lavender
800	Industrial Grey
805	Charcoal Granite
810	Graphite
975	Galvanized

D - MOUNTING

Please Note: If Flush Mount [F] is selected in **Section A**, please select **NA**

NA Not Applicable

CSA LISTED CORD OPTIONS:

SBK	Standard Black
SWH	Standard White
CSB	Black Cloth
CSW	White Cloth
CSR	Red Cloth
CSBB	Black & Brown Cloth
CSRW	Red & White Cloth
CSGW	Gold & White Cloth
CSBG	Black & Gold Cloth
CSBW	Black & White Cloth
CSBP	Black & Pink Cloth
CSUW	Blue & White Cloth
CMG	Grey Cotton
CRZ	Red Chevron

NON-CSA LISTED CORD OPTIONS²:

TBK	Black Cotton Twist
TWH	White Cotton Twist
TBR	Brown Cotton Twist
TRD	Red Cotton Twist
TPT	Putty Cotton Twist
TBW	Black & White Twist
TRW	Red & White Twist
TBB	Brown & Beige Twist

CHAIN MOUNT OPTIONS:

CN36	3' of Chain
CN48	4' of Chain
CN60	5' of Chain
CN72	6' of Chain

D - MOUNTING (CONTINUED)**GOOSENECK OPTIONS:**

G1	G16
G2	G17
G3³	G19
G4³	G22
G5	G24
G6	G25
G7	G26
G8	G32
G9	G34
G10	G35
G11	G36⁴
G12	G40⁴
G13	G64⁴
G14	G65⁴
G15	

STEM MOUNT OPTIONS:

ST506	.5" Stem Mount, 6"
ST512	.5" Stem Mount, 12"
ST518	.5" Stem Mount, 18"
ST524	.5" Stem Mount, 24"
ST536	.5" Stem Mount, 36"
ST548	.5" Stem Mount, 48"
ST706	.75" Stem Mount, 6"
ST712	.75" Stem Mount, 12"
ST718	.75" Stem Mount, 18"
ST724	.75" Stem Mount, 24"
ST736	.75" Stem Mount, 36"
ST748	.75" Stem Mount, 48"

E - MOUNTING FINISH

Please Note: See **Section C** for all applicable Mounting Finish Options. 980-Brushed Aluminum is also available for Gooseneck (Not available with G36, G40, G65, and G65) and Stem mounting styles.
(I) If Cord Hung [C] Mounting Style, selection identifies canopy finish
(II) If Chain Hung [CN] Mounting Style, selection identifies chain and canopy finish
(III) If Stem Mount [S] Mounting Style, selection identifies stem and canopy finish
(IV) If Gooseneck [G] Mounting Style, selection identifies gooseneck and backing plate finish

980 Brushed Aluminum

F - CORDS⁵

Please Note: See **Section D** for all applicable CSA Listed Cord Options for Chain Hung Mounting Style. Not available with Non-CSA Listed Cord Options.

NA Not Applicable

G - SHADE ACCESSORY

NA	None
WC	Wire Cage
ACR	Acrylic Diffuser ^{6,7}

H - SHADE ACCESSORY FINISH

Please Note: See **Section C** for Wire Cage and Acrylic Diffuser Finish Options, if no Wire Cage is selected in Section G, select NA.

NA Not Applicable

I - MOUNTING ACCESSORY

NA	None/Not Applicable
HSC	Hang Straight Canopy ⁸
HDSMC	Heavy Duty Stem Mount Canopy ⁸
HDBP	Heavy Duty Backing Plate ⁹
DD	Dusk-to-Dawn Photocell ⁹


J - LIGHT SOURCE

E26	200 Watt Max
GU24	GU24 Bi-Pin, 23W Max ^{10,11}


IMPORTANT: (1) All Powder Coat finished shades, Galvanized excluded, feature a white interior (2) Not available with Chain Hung option (3) Not available with 16" and larger size shades (4) Not available in 980 (5) Only applicable if Chain Hung Mounting Style selected in Section A, select NA if another Mounting Style is selected (6) Acrylic Diffuser accessory reduces incandescent wattage to 60W (7) Fixture is UL Listed for Damp Locations with Acrylic Diffuser (8) Only applicable with Stem Mount Mounting Style (9) Only applicable with Gooseneck Mounting Style (10) Fixtures configured with a GU24 socket are non-returnable (11) Not available with Acrylic Diffusers

MOUNTING STYLE


CHAIN HUNG PENDANT (CN)

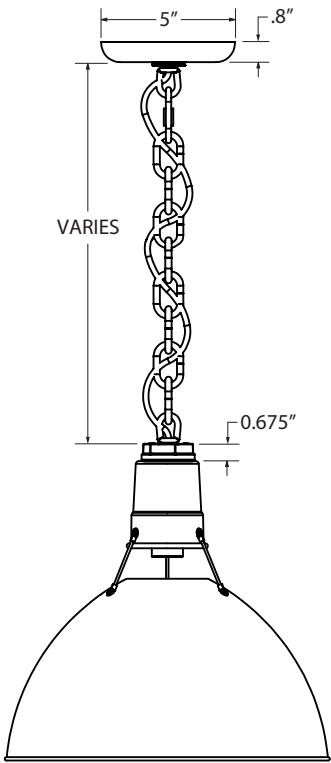


FLUSH MOUNT (F)

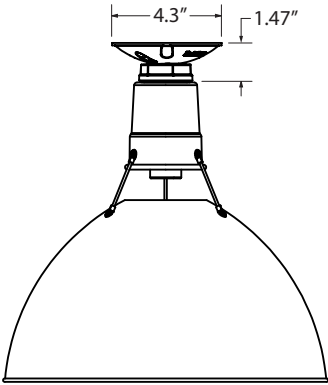


STEM MOUNT PENDANT (S)

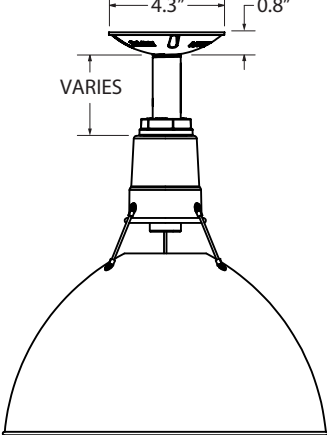


CORD HUNG PENDANT (C)

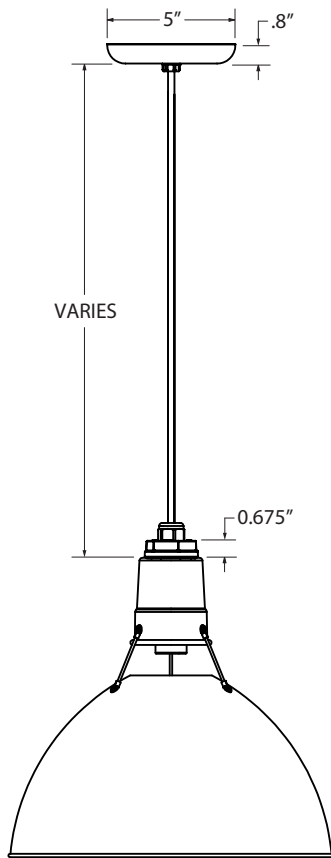

GOOSENECK (G)

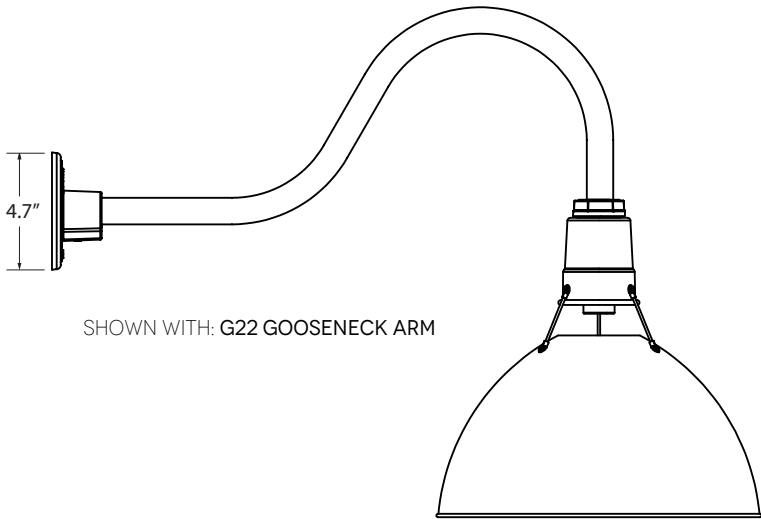

AVAILABLE SHADE SIZES

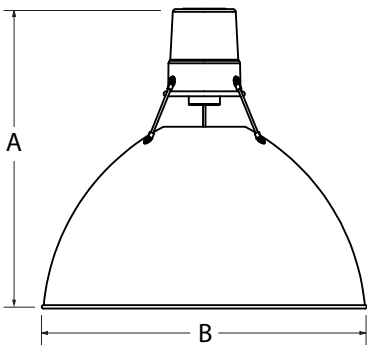

SHADE CODE	HEIGHT (A)	DIAMETER (B)
ULW12	11.9"	12"
ULW14	13.2"	14"
ULW16	14.7"	16"
ULW18	15.9"	18"
ULW20	16.2"	20"

SPECIFICATIONS**CERTIFICATIONS, LISTINGS & WARRANTY**

MADE IN THE USA

Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility
Located in Titusville, FL

CSA LISTED FOR DAMP LOCATIONS

Includes Gooseneck, Chain, Stem, Flush and Select Cord Mounting
Styles

UL CERTIFICATION

UL Listed Fixtures Available upon Request. Please Consult Factory
for Additional Information.

LIMITED WARRANTY

For Additional Information on Our Limited Warranty, Please See
Our Terms & Conditions

LIGHT SOURCE

INCANDESCENT

Medium Base E26 Socket, 120 VAC, 200W Max

COMPACT FLUORESCENT

Bi-Pin Base GU24 Socket, 120 VAC, 23W Max

CONSTRUCTION & FINISH

POWDER COAT SHADE

Hand-Spun from High Purity 3003-O Temper Aluminum

POWDER COAT FINISHES

Polyester Powder Coat Finishes Are Electro-Statically Applied and
Thermocured

STEM

1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40,
6063 Aluminum Mounting Stem. Custom Lengths Available upon
Request.

GOOSENECK

1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40,
6063 Aluminum Gooseneck

CORD

Cord-hung Pendants Include 7' of Standard Cord or 5' Of Cotton
Cord, +/- For Socket Orientation

CHAIN

4-Gauge Chain Complete with Quick Link for On-Site
Adjustments to Chain's Length

MAX FIXTURE WEIGHT

10 lbs