



Order Example: BLE - C - ULC18 - 420 - CSRW - 200 - RIB - NA - GU24 - NA


<p>A - MOUNTING STYLE</p> <p>C Cord Hung S Stem Mount G Gooseneck F Flush Mount</p> <p>B - SHADE & SHADE SIZE</p> <p><i>THE CHEROKEE UPLIGHT:</i> ULC12 ULC14 ULC16 ULC18</p> <p>C - SHADE FINISH</p> <p><i>POWDER COAT FINISHES⁴:</i></p> <p>100 Black 105 Textured Black 200 White 300 Dark Green 307 Emerald Green 311 Jadite 370 Mint 380 Chartreuse 390 Teal 400 Barn Red 420 Orange 470 Watermelon 480 Blush Pink 490 Magenta 500 Buttery Yellow 570 Sunflower 600 Bronze 601 Chocolate 605 Rust 615 Oil-Rubbed Bronze 700 Royal Blue 705 Navy 710 Cobalt Blue 715 Delphite Blue 800 Industrial Grey 805 Charcoal Granite 810 Graphite 975 Galvanized</p> <p><i>NATURAL FINISHES⁶:</i></p> <p>995 Raw Copper 996 Weathered Copper 997 Raw Brass 998 Weathered Brass 999 Oil-Rubbed Copper</p>	<p>D - MOUNTING</p> <p><i>CSA LISTED CORD OPTIONS:</i></p> <p>SBK Standard Black SWH Standard White CSB Black Cloth CSW White Cloth CSR Red Cloth CSBB Black & Brown Cloth CSRW Red & White Cloth CSGW Gold & White Cloth CSBG Black & Gold Cloth CSBW Black & White Cloth CSBP Black & Pink Cloth CSUW Blue & White Cloth</p> <p><i>NON-CSA LISTED CORD OPTIONS:</i></p> <p>CBK Black Cotton CMG Grey Cotton CRZ Red Chevron TBK Black Cotton Twist[†] TWH White Cotton Twist[†] TBR Brown Cotton Twist[†] TRD Red Cotton Twist[†] TPT Putty Cotton Twist[†] TBW Black & White Twist[†] TRW Red & White Twist[†] TBB Brown & Beige Twist[†]</p> <p><i>STEM MOUNT OPTIONS:</i></p> <p>ST506 .5" Stem Mount, 6"[†] ST512 .5" Stem Mount, 12"[†] ST518 .5" Stem Mount, 18"[†] ST524 .5" Stem Mount, 24"[†] ST536 .5" Stem Mount, 36"[†] ST548 .5" Stem Mount, 48"[†] ST706 .75" Stem Mount, 6"[†] ST712 .75" Stem Mount, 12"[†] ST718 .75" Stem Mount, 18"[†] ST724 .75" Stem Mount, 24"[†] ST736 .75" Stem Mount, 36"[†] ST748 .75" Stem Mount, 48"[†]</p> <p><i>GOOSENECK OPTIONS:</i></p> <p>G1' G16' G2' G17 G3' G19' G4 G22 G5' G24 G6' G25 G7 G26' G8 G32 G9 G34' G10 G35'</p>	<p>D - MOUNTING (CONTINUED)</p> <p><i>GOOSENECK OPTIONS:</i></p> <p>G11' G36' G12' G40' G13 G64' G14 G65' G15</p> <p><i>FLUSH MOUNT OPTIONS:</i></p> <p>FM'</p> <p>E - MOUNTING FINISH</p> <p><i>Please Note: See Section C for all applicable Mounting Finish Options (I) If Cord Hung [C] Mounting Style, selection identifies canopy finish (II) If Flush Mount [F] Mounting Style, select NA (III) If Stem Mount [S] Mounting Style, selection identifies stem and canopy finish (IV) If Gooseneck [G] Mounting Style, selection identifies gooseneck and wall backing plate finish</i></p> <p>NA Not Applicable</p> <p>F - GLASS OPTION</p> <p>CLR Clear Glass⁷ FST Frosted Glass RIB Ribbed Glass CCR Clear Crackle Glass SMK Smoke Crackle Glass HCR Honey Crackle Glass</p>	<p>G - MOUNTING ACCESSORY</p> <p>NA None/Not Applicable HSC Hang Straight Canopy^{1,3} HDSMC Heavy Duty Stem Mount Canopy¹ HDBP Heavy Duty Backing Plate^{1,2} DD Dusk-to-Dawn Photocell² DBPC Decorative Backing Plate Cover DCHX Decorative Backing Plate Cover & Hex Cover</p> <p>H - LIGHT SOURCE</p> <p>E26 100 Watt Max GU24 24 Bi-Pin, 18W Max LED16.8 16.8W LED, 1600 Lumen</p> <p>I - COLOR TEMPERATURE⁵</p> <p>NA Not Applicable 2700K 2700K, Warm White 3000K 3000K, Neutral White 3500K 3500K, Bright White 4000K 4000K, Cool White</p>
---	---	---	--

IMPORTANT: (1) Not available in Natural Finishes (2) Not available in LED (3) Only applicable if Stem Mounting Style selected in Section A (4) All Powder Coat finished shades, Galvanized excluded, feature a white interior (5) Only applicable if LED16.8 Light Source is selected in Section J, select NA is non-LED source selected (6) Natural Finishes have a longer estimated manufacturing time, please check the website for exact lead time. There are no returns accepted on Natural Finishes (7) Not recommended if LED Light Source is selected in Section K


MOUNTING STYLE

Galvanized steel shades are crafted from 20 Ga Sheet metal while 1100-0 Aluminum—ranging from 0.050" to 0.125"—is used for all other shades. All shades have their edges rolled, and the result is highly durable and stylish lighting.


CORD HUNG PENDANT (C)

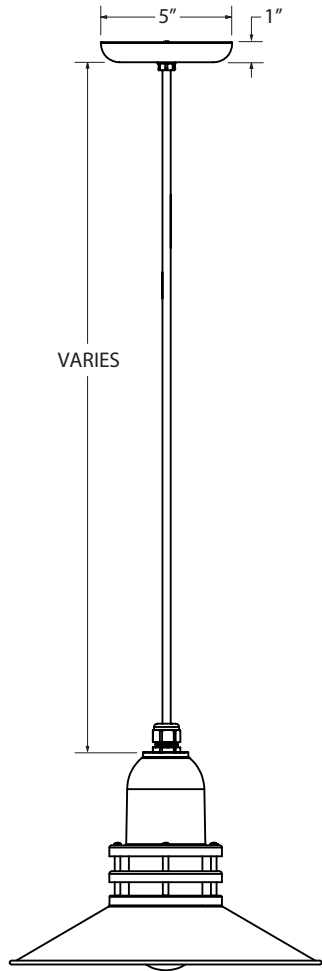


FLUSH MOUNT (F)



STEM MOUNT PENDANT (S)

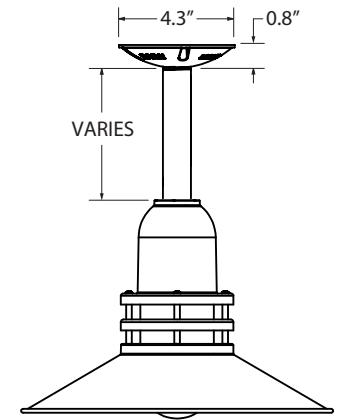


GOOSENECK (G)

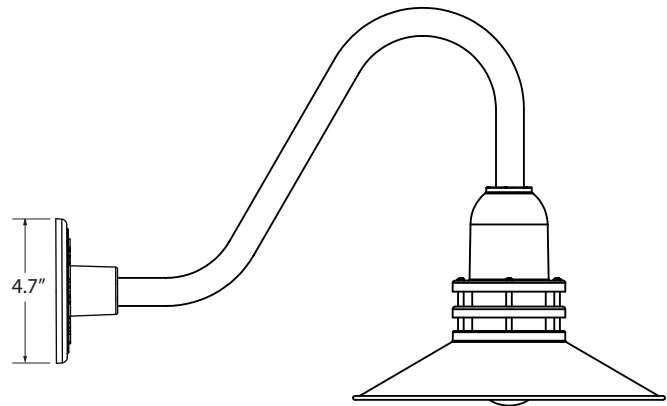

SHOWN WITH: G26 GOOSENECK ARM

AVAILABLE SHADE SIZES



SHADE CODE	HEIGHT (A)	DIAMETER (B)
ULC12	9.5"	12"
ULC14	10"	14"
ULC16	10.75"	16"
ULC18	11.25"	18"

LIGHT SOURCE

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact the factory.

OPTION	WATTAGE	LUMENS <small>*Avg. value, actual value dependent on bulb used</small>	CRI	VOLTAGE	DIMMING
INCANDESCENT (MED E26)					
E26	100W Max	1400*	100	120 VAC	Bulb Dependant
COMPACT FLOURESCENT (GU24 CFL)					
GU24	18W Max	1400*	75	120 VAC	Bulb Dependant
LED					
LED16.8	16.8W	1600	>90	120 VAC	TRIAC

SPECIFICATIONS

MOUNTING

STEM
1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Mounting Stem. Custom Lengths Available upon Request.

GOOSENECK
1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Gooseneck

CORD
Cord-hung Pendants Include 7' Of Standard Cord Or 5' Of Cotton Cord, +/- For Socket Orientation

SHADE & FINISHES

CHEROKEE UPLIGHT SHADE
Hand-Spun from High Purity 0.050" Thick 3003-O Temper Aluminum

POWDER COAT FINISHES
Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA
Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS
Includes All Stem, Flush Mount and Gooseneck Mounting Styles

CSA LISTED FOR DAMP LOCATIONS
Includes Select Cord Hung Mounting Styles

LIMITED WARRANTY
For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions

LED SPECIFICATIONS

LUMEN MAINTENANCE
LED16.8 Source is L90(11K) > 61,000 Hours.

COLOR TEMPERATURES
Standard Color Temperatures Available Include 2700K, 3000K, 3500K and 4000K. Custom Temperatures Available upon Request.

CRI
Minimum 90 CRI. Consult Factory for Other CRI Options.

EFFICACY
Delivers over 95 Lumens per Watt

DRIVER & DIMMING OPTION
Reliant on Triac Dimming 16.8W / 120V, Dimmable down to 1% Depending on Dimmer. Requires Compatible Dimming Switch.