



REV 05.24.18

THE ELLIPTICAL SIGN LIGHT

BARN LIGHT SIGN LIGHT COLLECTION

Max Weight: 10.0 lbs

PROJECT NAME _____

PROJECT TYPE _____

SPS-0082

BLE - G - _____
A B C D E F G

Order Example: BLE - G - ASL11 - 300 - G24 - 980 - NA - HDBP - E26

A - SHADE SIZE

ELLIPTICAL:

ASL9	9" Shade
ASL11	11" Shade
ASL13	13" Shade
ASL15	15" Shade

B - SHADE FINISH

POWDER COAT FINISHES¹:

100	Black
105	Textured Black
200	White
300	Dark Green
307	Emerald Green
311	Jadite
370	Mint
380	Chartreuse
390	Teal
400	Barn Red
420	Orange
470	Watermelon
480	Blush Pink
490	Magenta
500	Buttery Yellow
570	Sunflower
600	Bronze
601	Chocolate
605	Rust
615	Oil-Rubbed Bronze
700	Royal Blue
705	Navy
710	Cobalt Blue
715	Delphite Blue
800	Industrial Grey
805	Charcoal Granite
810	Graphite
975	Galvanized

C - GOOSENECK ARMS

GOOSENECK OPTIONS:

G1	G16
G2	G17
G4	G19
G5	G22
G6	G24
G7	G25
G8	G26
G9	G32
G10	G34
G11	G35
G12	G36
G13	G40
G14	G64
G15	G65

D - GOOSENECK ARM FINISH

Please Note: See **Section B** for all applicable Gooseneck Arm Finish Options. Gooseneck arms are also available in 980-Brushed Aluminum.

980 Brushed Aluminum

E - SWIVEL KNUCKLE

NA	None
SWK	Swivel Knuckle

F - MOUNTING ACCESSORY

NA	None
HDBP	Heavy Duty Backing Plate
DD	Dusk-to-Dawn Photocell
DBPC	Decorative Backing Plate Cover



G - LIGHT SOURCE

E26	200 Watt Max
GU24	24 Bi-Pin, 23W Max ²


IMPORTANT: (1) All Powder Coat finished shades, Galvanized excluded, feature a white interior (2) Fixtures configured with a GU24 socket are non-returnable

DIMENSIONAL DRAWING

Galvanized steel shades are crafted from 20 Ga Sheet metal while 1100-0 Aluminum—ranging from 0.050" to 0.125"—is used for all other shades. All shades have their edges rolled, and the result is highly durable and stylish lighting.

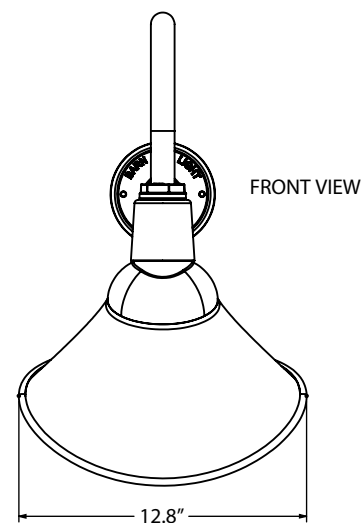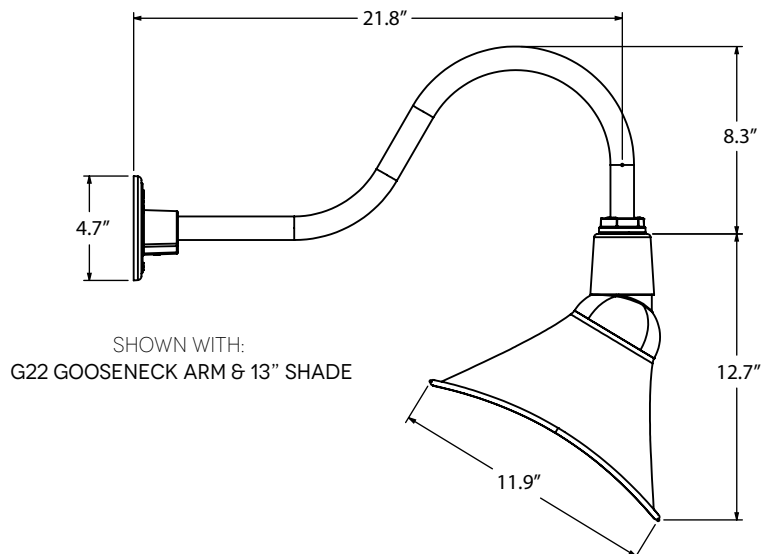

AVAILABLE SHADE SIZES

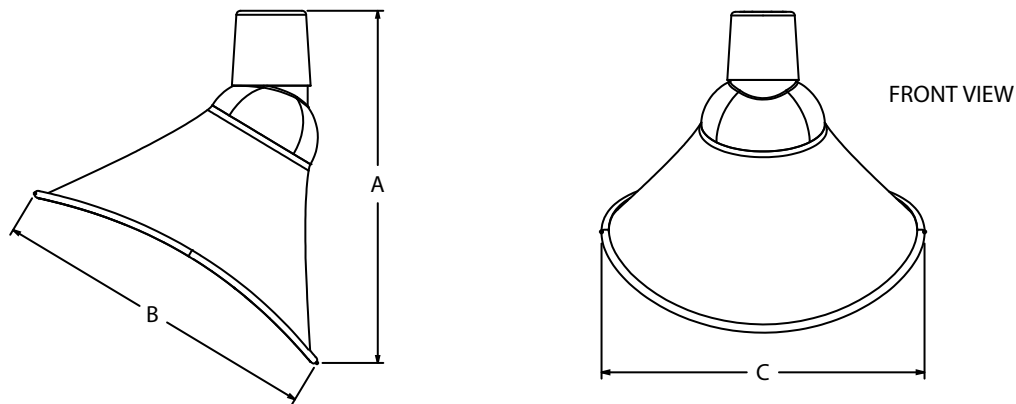

SHADE CODE	HEIGHT (A)	WIDTH (B)	LENGTH (C)
ASL9	8.8"	7.6"	8.6"
ASL11	11.2"	8.6"	11"
ASL13	12.7"	11.9"	12.8"
ASL15	13.2"	14"	15.2"

LIGHT SOURCE

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact the factory.

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
INCANDESCENT (MED E26)					
E26	200W Max	1400	100	120 VAC	Bulb Dependant
COMPACT FLOURESCENT (GU24 CFL)					
GU24	23W Max	1400	75	120 VAC	Bulb Dependant

SPECIFICATIONS

MOUNTING

GOOSENECK
1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40,
6063 Aluminum Gooseneck

SHADE & FINISHES

ELLIPTICAL SHADE
Hand-Spun from High Purity 0.050" Thick 3003-O Temper
Aluminum

POWDER COAT FINISHES
Polyester Powder Coat Finishes Are Electro-Statically Applied and
Thermocured

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA
Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility
Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS

LIMITED WARRANTY
For Additional Information on Our Limited Warranty, Please See
Our Terms & Conditions