




SPS-0060 REV B

VON BRAUN 4-LIGHT CHANDELIER

JOB NAME: _____ FIXTURE TYPE: _____



BLE - S - WHS12 - CH007 - _____ - _____ - _____ - _____ - _____ - _____ - _____

A B C D E F

G

Order Example: BLE - S - WHS12 - CH007 - 311 - ST536 - SC - WC - NA - 975 - E26

A - FINISHES**POWDER COAT FINISHES¹:**

100	Black
105	Textured Black
106	Matte Black
200	White
206	Matte White
300	Dark Green
307	Emerald Green
311	Jadite
370	Mint
380	Chartreuse
390	Teal
400	Barn Red
420	Orange
470	Watermelon
480	Blush Pink
490	Magenta
495	Sherbet Orange
500	Buttery Yellow
570	Sunflower
600	Bronze
601	Chocolate
605	Rust
615	Oil-Rubbed Bronze
700	Royal Blue
705	Navy
710	Cobalt Blue
715	Delphite Blue
790	Lavender
800	Industrial Grey
805	Charcoal Granite
810	Graphite
975	Galvanized

B - STEM LENGTH**STEM MOUNT OPTIONS:**

ST512	.5" Stem Mount, 12"
ST518	.5" Stem Mount, 18"
ST524	.5" Stem Mount, 24"
ST536	.5" Stem Mount, 36"
ST548	.5" Stem Mount, 48"

C - CANOPY

SC	Standard Canopy
HSC	Hang Straight Canopy
HDSMC	Heavy Duty Stem Mount Canopy

D - OPTIONAL ACCESSORIES

NA	None
WGG	Wire Guard ²
CGG	Standard Cast Guard ²
TGG	Heavy Duty Cast Guard ²
WC	Wire Cage
ACR	Acrylic Diffuser ^{3,4,5}

E - OPTIONAL GLASS^{6,7}

NA	Not Applicable
CLR	Clear Glass
FST	Frosted Glass
RIB	Ribbed Glass
SMK	Smoke Crackle Glass
BLU	Blue Glass
RED	Red Glass
AMB	Amber Glass
GRN	Green Glass

F - OPTIONAL ACCESSORY FINISH

Please Note: See **Section A** for all applicable Finish Options (1) If no accessory is selected in Section D, select NA


NA Not Applicable

G - LIGHT SOURCE


E26	150 Watt Max
GU24	24 Bi-Pin CFL, 23W Max ⁸

IMPORTANT: (1) All Powder Coat finished shades, Galvanized excluded, feature a white interior (2) Guard and Glass Accessory reduces incandescent wattage to 100W Max and GU24 Bi-Pin to 18W Max (3) Acrylic Diffuser Accessory reduces incandescent wattage to 60W (4) Not available with the Guard and Glass Accessory (5) Fixture is UL Listed for Damp Locations with Acrylic Diffuser (6) Selection only applicable if an Optional Guard is selected in Section D, select NA if no guard is selected (7) Not applicable if WC or ACR is selected in Section D (8) Fixtures configured with GU24 sockets are non-returnable


MOUNTING DIMENSIONS

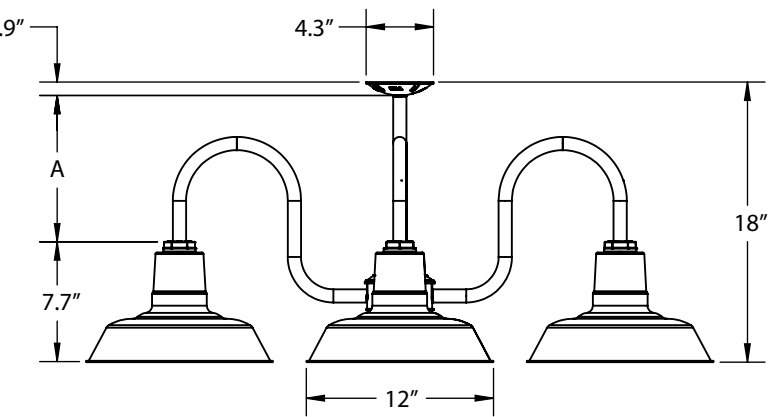

SHOWN ABOVE WITH: STANDARD CANOPY & 12" STEM

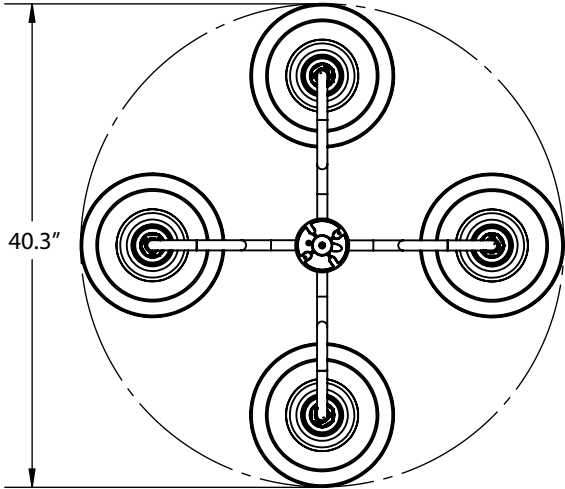

STEM LENGTH	HEIGHT (A)
ST512 (12" Stem)	9.4"
ST518 (18" Stem)	15.4"
ST524 (24" Stem)	21.4"
ST536 (36" Stem)	31.4"
ST548 (48" Stem)	43.4"

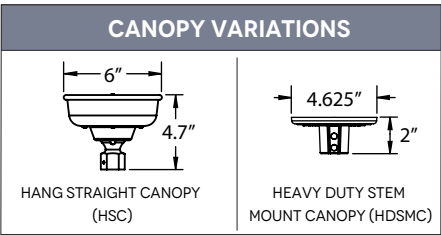

SPECIFICATIONS

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA
Manufactured and Hand-Crafted in our 60,000 Square Foot Facility
Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS
(Acrylic Diffuser Option UL Listed for Damp Location)

LIMITED WARRANTY
For Additional Information on our Limited Warranty, Please See
Our Terms & Conditions

CONSTRUCTION & FINISH

SHADE
Hand-Spun from High Purity 3003-O Temper Aluminum

GALVANIZED SHADE
Hand Spun from High Quality Galvanized Steel

STEM
1/2" Nominal (0.84" Actual) Aluminum Mounting Stem. Custom
Lengths Available Upon Request.

MOUNTING ARMS
1/2" Nominal (0.84" Actual) Aluminum Mounting Arm

POWDER COAT FINISHES
Polyester Powder Coat Finishes Are Electro-Statically Applied and
Thermocured

LIGHT SOURCE

INCANDESCENT
Medium Base E26 Socket, 120 VAC, 150 Watt Max per Socket

COMPACT FLUORESCENT
Bi-Pin Base GU24 Socket, 120 VAC, 23 Watt Max per Socket