INDY PORCELAIN SOCKET PENDANT

_	_	_
	I	
	П	
	1	
	П	
	A	
	п	

BLE - C - PINDY -

Order Example: BLE - C - PINDY - CSRW - 400

7.1		n		R
4	-		1.1	 Μ.

UL LISTED CORD OPTIONS:

SBK Standard Black **SWH** Standard White CSB Black Cloth **CSW** White Cloth CSR **Red Cloth**

CSBW Black & White Cloth Red & White Cloth **CSRW** CSBG Black & Gold Cloth CSBP Black & Pink Cloth CSGW Gold & White Cloth CSUW Blue & White Cloth **CSBB** Black & Brown Cloth CRZ **Red Chevron** CMG **Grey Cotton**

NON-UL LISTED CORD OPTIONS:

TBW Black & White Twist TBK Black Cotton Twist TWH White Cotton Twist TRW Red & White Twist TBR **Brown Cotton Twist TBB Brown & Beige Twist TRD Red Cotton Twist Putty Cotton Twist TPT**

B - CEILING CANOPY FINISH

POWDER COAT FINISHES:

100 Black 105 **Textured Black** 200 White 300 Dark Green 307 **Emerald Green Jadite**

311 370 Mint 380 Chartreuse 390 Teal 400 Barn Red 420 Orange 470 Watermelon 480 Blush Pink 490 Magenta 495 **Sherbet Orange** 500 **Buttery Yellow**

570 Sunflower 600 Bronze 601 Chocolate 605 615 Oil-Rubbed Bronze

700 Royal Blue 705 Navy Cobalt Blue 710 715 Delphite Blue 790 Lavender


B - CEILING CANOPY FINISH (CONTINUED)

POWDER COAT FINISHES:

800 **Industrial Grey** 805 Charcoal Granite 810 Graphite 975 Galvanized

IMPORTANT:

MOUNTING DIMENSIONS

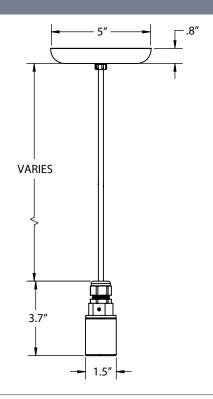

SPECIFICATIONS

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA

Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

UL LISTED FOR DRY LOCATIONS

LIMITED WARRANTY

For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions

CONSTRUCTION & FINISH

CANOPY

Hand-Spun, High Purity 0.050" Thick 3003-O Temper Aluminum Shade and Canopy (Alternatively, Spun from High Quality Galvanized Steel if 975 Finish is Chosen)

POWDER COAT FINISHES

Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured on the Canopy

CORD

Cord-Hung Pendants Include 7' of Standard Cord or 5' of Cotton Cord, +/- for Socket Orientation

MAX FIXTURE WEIGHT

10 lbs

LIGHT SOURCE

INCANDESCENT

Medium Base E26 Socket, 120 VAC, 200 Watt Max