




SPS-0237 REV B

**DUAL ARM FIRE CHIEF SIGN LIGHT**

JOB NAME: \_\_\_\_\_ FIXTURE TYPE: \_\_\_\_\_



BLE - G - 2ASFC - G55 - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_

A                      B                      C                      D                      E                      F

\_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_

G                      H                      I

Order Example: BLE - G - 2ASFC - G55 - ASFC14 - 400 - 12 - 400 - NA - WC - 100 - DD - E26

**A - SHADE SIZE**

- ASFC10** (2) 10" Shades  
**ASFC12** (2) 12" Shades  
**ASFC14** (2) 14" Shades

**B - FINISHES****POWDER COAT FINISHES<sup>1</sup>:**

- 100** Black  
**105** Textured Black  
**200** White  
**300** Dark Green  
**307** Emerald Green  
**311** Jadite  
**370** Mint  
**380** Chartreuse  
**390** Teal  
**400** Barn Red  
**420** Orange  
**470** Watermelon  
**480** Blush Pink  
**490** Magenta  
**495** Sherbet Orange  
**500** Buttery Yellow  
**570** Sunflower  
**600** Bronze  
**601** Chocolate  
**605** Rust  
**615** Oil-Rubbed Bronze  
**700** Royal Blue  
**705** Navy  
**710** Cobalt Blue  
**715** Delphite Blue  
**790** Lavender  
**800** Industrial Grey  
**805** Charcoal Granite  
**810** Graphite  
**975** Galvanized

**NATURAL FINISHES<sup>2</sup>:**

- 995** Raw Copper  
**996** Weathered Copper  
**997** Raw Brass  
**998** Weathered Brass  
**999** Oil-Rubbed Copper

**C - ARM PROJECTION**

- 12** 12" Arm Projection  
**24** 24" Arm Projection  
**36** 36" Arm Projection

**D - MOUNTING FINISH**

Please Note: See **Section B** for all applicable Mounting Finish Options. Additionally, 980-Brushed Aluminum is available.  
 (1) If a Natural Finish is selected, please note the wall backing plate, (2) elbows, (2) hex couplers and t-joint will come in a 980-Brushed Aluminum finish. Optional Copper/Brass Backing Plate is available.  
**980** Brushed Aluminum

**E - SWIVEL KNUCKLE**

- NA** None/No Swivel Knuckle  
**SWK** Swivel Knuckle

**F - WIRE CAGE**

- NA** None/No Wire Cage  
**WC** Wire Cage<sup>3</sup>

**G - WIRE CAGE FINISH**

Please Note: See **Section B** for all applicable Wire Cage Finish Options.  
 (I) Wire Cage not available in Natural Finishes, Powder Coat Finishes only.  
 (II) Select NA if no Wire Cage is selected in Section F.

- NA** Not Applicable

**H - MOUNTING ACCESSORY**



- NA** None  
**DBPC** Copper/Brass Backing Plate Cover  
**DD** Dusk-to-Dawn Photocell  
**HDPC** Heavy Duty Backing Plate

**I - SOCKET TYPE**

- E26** 200 Watt Max  
**GU24** 24 Bi-Pin, 23W Max<sup>4</sup>

**IMPORTANT:** (1) All Powder Coat finished shades, with the exception of 975-Galvanized, feature a white interior (2) Natural Finishes have a longer estimated lead time, please check the website for exact manufacturing time. There are no returns accepted on Natural Finishes. (3) Wire Cage not available in Natural Finishes (4) Fixtures configured with a GU24 socket are non-returnable

**DIMENSIONAL DRAWING**

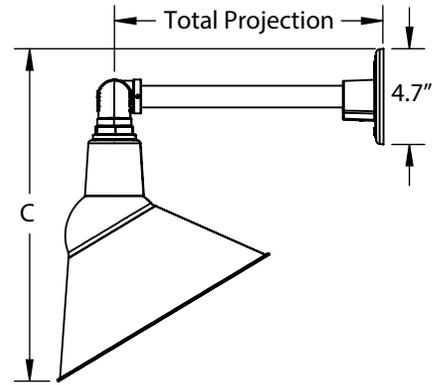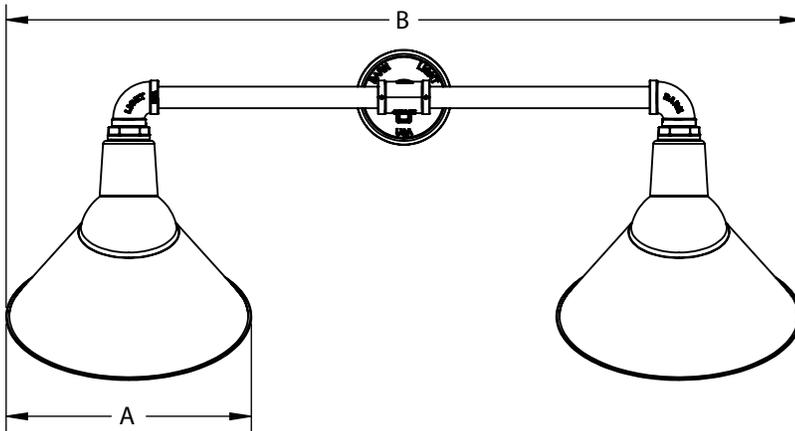

SHADE CODE	DIAMETER (A)	WIDTH (B)	HEIGHT (C)
ASFC10	10"	37"	15"
ASFC12	12"	39"	16"
ASFC14	14"	41"	17.4"

ARM PROJECTION	TOTAL PROJECTION
12 12" Arm Projection	13.1"
24 24" Arm Projection	25.1"
36 36" Arm Projection	37.1"

**SPECIFICATIONS**

**CONSTRUCTION**

MOUNTING ARMS  
 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Mounting Arms. Custom Lengths Available upon Request.

**CERTIFICATIONS, LISTINGS & WARRANTY**

MADE IN THE USA  
 Manufactured and Hand-Crafted in our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS

LIMITED WARRANTY  
 For Additional Information on our Limited Warranty, Please See Our Terms & Conditions

OPERATING TEMPERATURE  
 -30°C to 40°C

MAX FIXTURE WEIGHT  
 10 lbs

**SHADE & FINISHES**

POWDER COATED FIRE CHIEF SHADES  
 Hand-Spun from High Purity 0.050" Thick 3003-O Temper Aluminum

POWDER COAT FINISHES  
 Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured

**LIGHT SOURCE**

INCANDESCENT  
 Medium Base E26 Socket, 200W Max, 120 VAC

COMPACT FLUORESCENT  
 Bi-Pin Base GU24 Socket, 23W Max, 120 VAC