




Order Example: BLE - G - SCH14 - 500 - G22 - NA - NA - PB3 - 100 - LED16 - 3000K

| | | | |
|---|--|---|--|
| <p>A - MOUNTING STYLE</p> <p>C Cord Hung CN Chain Hung¹ FSF Semi-Flush Mount G Gooseneck S Stem Mount</p> <p>B - GLASS STYLE & SIZE</p> <p>SCH10 Small, 10" Opaque Glass SCH14 Large, 14" Opaque Glass SCHCL10 Small, 10" Clear Glass SCHCL14 Large, 14" Clear Glass</p> <p>C - FIXTURE FINISH</p> <p><i>(I) If Cord Hung [C] Mounting Style selected, selection identifies fitter and canopy finish</i> <i>(II) If Chain Hung [CN] Mounting Style selected, selection identifies fitter, chain and canopy finish</i> <i>(III) If Semi-Flush Mount [FSF] Mounting Style selected, selection identifies fitter and canopy finish</i> <i>(IV) If Gooseneck [G] Mounting Style selected, selection identifies fitter, gooseneck and wall backing plate finish</i> <i>(V) If Stem Mount [S] Mounting Style selected, selection identifies fitter, stem and canopy finish</i></p> <p>POWDER COAT FINISHES:</p> <p>100 Black 105 Textured Black 200 White 300 Dark Green 307 Emerald Green 311 Jadite 370 Mint 380 Chartreuse 390 Teal 400 Barn Red 420 Orange 470 Watermelon 480 Blush Pink 490 Magenta 500 Buttery Yellow 570 Sunflower 600 Bronze 601 Chocolate 605 Rust 615 Oil-Rubbed Bronze 700 Royal Blue 705 Navy</p> | <p>C - FIXTURE FINISH (CONTINUED)</p> <p>POWDER COAT FINISHES:</p> <p>710 Cobalt Blue 715 Delphite Blue 800 Industrial Grey 805 Charcoal Granite 810 Graphite 975 Galvanized</p> <p>NATURAL FINISHES²:</p> <p>995 Raw Copper 996 Weathered Copper 997 Raw Brass 998 Weathered Brass 999 Oil-Rubbed Copper</p> <p>D - MOUNTING</p> <p>CSA LISTED CORD OPTIONS:</p> <p>SBK Standard Black SWH Standard White CSB Black Cloth CSW White Cloth CSR Red Cloth CSBW Black & White Cloth CSRW Red & White Cloth CSBG Black & Gold Cloth CSBP Black & Pink Cloth CSGW Gold & White Cloth CSUW Blue & White Cloth CSBB Black & Brown Cloth</p> <p>NON-CSA LISTED CORD OPTIONS:</p> <p>CBK Black Cotton CRZ Red Chevron CMG Grey Cotton TBW Black & White Twist TBK Black Cotton Twist TWH White Cotton Twist TRW Red & White Twist TBR Brown Cotton Twist TBB Brown & Beige Twist TRD Red Cotton Twist TPT Putty Cotton Twist</p> <p>CHAIN MOUNT OPTIONS:</p> <p>CN36 3' of Chain CN48 4' of Chain CN60 5' of Chain CN72 6' of Chain</p> | <p>D - MOUNTING (CONTINUED)</p> <p>FLUSH MOUNT OPTIONS:</p> <p>FSF Semi-Flush Mount</p> <p>GOOSENECK OPTIONS:</p> <p>G1¹ G15 G2¹ G16¹ G3¹ G17 G4 G22 G5 G24 G6 G25 G7 G26¹ G8 G32 G9 G34¹ G10 G35¹ G11¹ G36¹ G12¹ G64¹ G13 G65¹ G14</p> <p>STEM MOUNT OPTIONS:</p> <p>ST503 .5" Stem Mount, 3"¹ ST506 .5" Stem Mount, 6" ST512 .5" Stem Mount, 12" ST518 .5" Stem Mount, 18" ST524 .5" Stem Mount, 24" ST536 .5" Stem Mount, 36" ST548 .5" Stem Mount, 48"</p> <p>E - CORDS³</p> <p>NA Not Applicable</p> <p>CSA LISTED CORD OPTIONS:</p> <p>SBK CSRW SWH CSBG CSB CSBP CSW CSGW CSR CSUW CSBW CSBB</p> <p>NON-CSA LISTED CORD OPTIONS:</p> <p>CBK CMG CRZ</p> | <p>F - MOUNTING ACCESSORIES</p> <p>NA None/Not Applicable HSC Hang Straight LED Canopy⁴</p> <p>G - PAINTED BAND</p> <p>NA No Painted Band PB1 Single Painted Band PB2 Double Painted Band PB3 Triple Painted Band</p> <p>H - PAINTED BAND FINISH</p> <p>NA Not Applicable 100 Black 200 White⁵ 307 Emerald Green 311 Jadite 390 Teal 400 Barn Red 490 Magenta 500 Buttery Yellow 600 Bronze 700 Royal Blue 705 Navy 715 Delphite Blue</p> <p>I - LIGHT SOURCE</p> <p>LED11 850 Lumen, 11W LED LED16 1250 Lumen, 16W LED</p> <p>J - COLOR TEMPERATURE</p> <p>2700K 2700K, Warm White 3000K 3000K, Neutral White 3500K 3500K, Bright White 4000K 4000K, Cool White</p> |
|---|--|---|--|

IMPORTANT: (1) Not available in Natural Finishes (2) Natural Finishes have a longer estimated manufacturing time, please check the website for exact lead time. There are no returns accepted on Natural Finishes. (3) Only applicable if Chain Hung mounting style is selected in Section A and D, select NA if alternative mounting selected (4) Only applicable if Stem Mount mounting style is selected in Section A and D, select NA if alternative mounting selected (5) White Painted Band not recommended if Opaque Glass is selected in Section B


MOUNTING STYLE

CORD HUNG PENDANT (C)

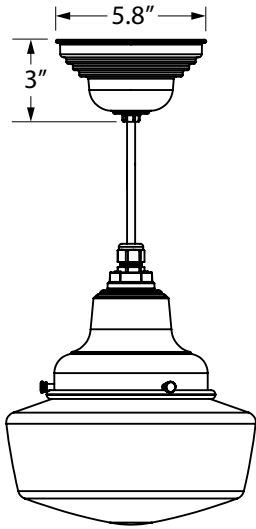


SHOWN WITH: SMALL 10" GLASS

SEMI-FLUSH MOUNT (FSF)

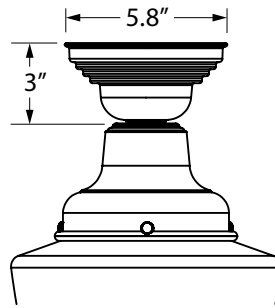


CHAIN HUNG PENDANT (CN)

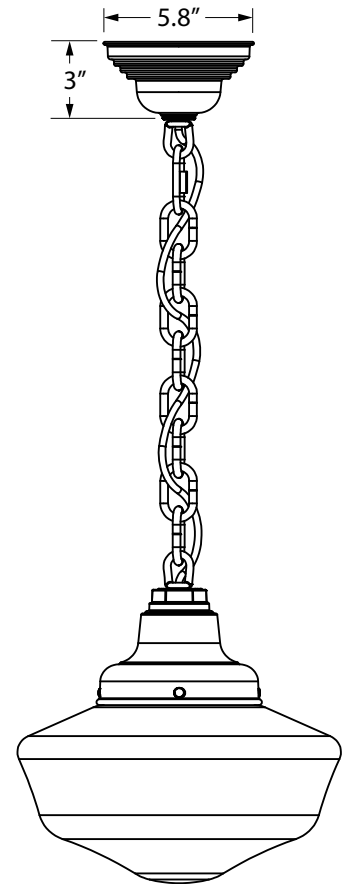

SHOWN WITH: LARGE 14" GLASS


GOOSENECK (G)

SHOWN WITH:
G26 GOOSENECK ARM
LARGE 10" GLASS

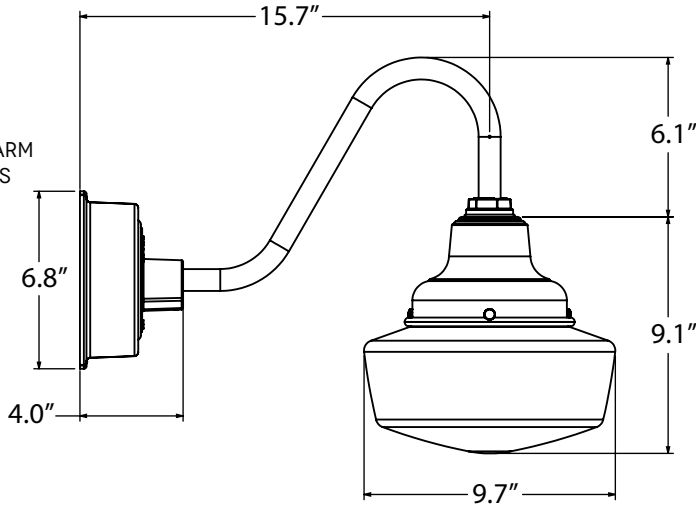


AVAILABLE GLASS SIZES


**SMALL 10" GLASS
(SCHCL10 & SCH10)**

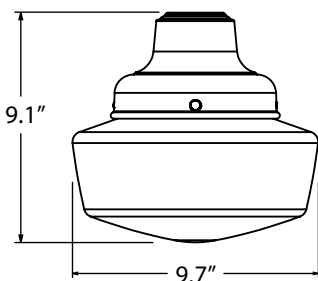

**LARGE 14" GLASS
(SCHCL14 & SCH14)**

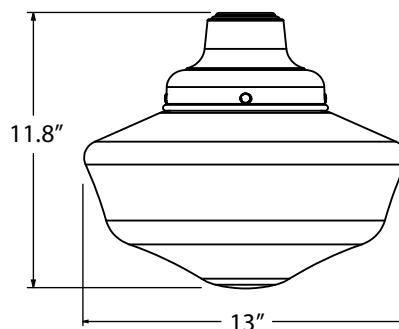

STEM MOUNT PENDANT (S)

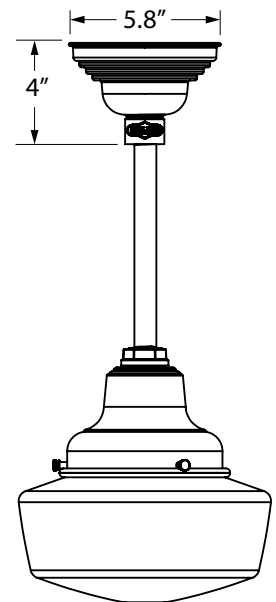

SHOWN WITH: SMALL 10" GLASS

LIGHT SOURCE

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact the factory.

| OPTION | WATTAGE | LUMENS | CRI | VOLTAGE | DIMMING |
|--------------|---------|--------|-----|---------|---------|
| LEDS | | | | | |
| LED11 | 11W | 850 | >90 | 120 VAC | TRIAC |
| LED16 | 16W | 1250 | >90 | 120 VAC | TRIAC |

SPECIFICATIONS

MOUNTING

STEM
 1/2" Nominal (0.84" Actual), 6063 Aluminum Mounting Stem.
 Custom Lengths Available upon Request.

GOOSENECK
 1/2" Nominal (0.84" Actual), 6063 Aluminum Gooseneck.

FIXTURE & FINISHES

SCHOOLHOUSE FITTER
 Hand-Spun from High Purity 0.050" Thick 3003-O Temper Aluminum

POWDER COAT FINISHES
 Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured

LED SPECIFICATIONS

LUMEN MAINTENANCE
 L70(7K) > 50,000 Hours

COLOR TEMPERATURES
 Standard Color Temperatures Available Include 2700K, 3000K, 3500K and 4000K. Custom Temperatures Available upon Request.

CRI
 Minimum 90 CRI. Consult Factory for Other CRI Options

EFFICACY
 Up to 78 Lumens per Watt

DRIVER & DIMMING OPTION
 850 and 1250 Lumen, Reliant on Triac Dimming Only Driver Mounted in Canopy. Dimmable down to 5% Depending on Dimmer. Requires Compatible Dimming Switch.

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA
 Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR DAMP LOCATIONS
 Includes All Chain, Semi-Flush Mount, Gooseneck and Stem Mount Styles

CSA LISTED FOR DRY LOCATIONS
 Includes Select Cord Hung Mounting Styles

LIMITED WARRANTY
 For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions