



REV 07.25.18

**THE ATOMIC TOPLESS MULTI-LIGHT CHANDELIER**

BARN LIGHT CHANDELIER COLLECTION

Max Weight: 10.0 lbs

PROJECT NAME \_\_\_\_\_

PROJECT TYPE \_\_\_\_\_

**SPS-0032**


**BLE - C - SCP06 -** \_\_\_\_\_ **A** \_\_\_\_\_ **B** \_\_\_\_\_ **C** \_\_\_\_\_ **D** \_\_\_\_\_ **E** \_\_\_\_\_ **F**

Order Example: BLE - C - SCP06 - 307 - CSBW - TGG - SMK - E26 - NA

A - FINISHES	B - CORDS	C - GUARD OPTION	E - LIGHT SOURCE
<p><b>POWDER COAT FINISHES:</b></p> <p><b>100</b> Black  <b>105</b> Textured Black  <b>200</b> White  <b>300</b> Dark Green  <b>307</b> Emerald Green  <b>311</b> Jadeite  <b>370</b> Mint  <b>380</b> Chartreuse  <b>390</b> Teal  <b>400</b> Barn Red  <b>420</b> Orange  <b>470</b> Watermelon  <b>480</b> Blush Pink  <b>490</b> Magenta  <b>500</b> Buttery Yellow  <b>570</b> Sunflower  <b>600</b> Bronze  <b>601</b> Chocolate  <b>605</b> Rust  <b>615</b> Oil-Rubbed Bronze  <b>700</b> Royal Blue  <b>705</b> Navy  <b>710</b> Cobalt Blue  <b>715</b> Delphite Blue  <b>800</b> Industrial Grey  <b>805</b> Charcoal Granite  <b>810</b> Graphite  <b>975</b> Galvanized</p>	<p><b>CSA LISTED CORD OPTIONS:</b></p> <p><b>SBK</b> Standard Black  <b>SWH</b> Standard White  <b>CSB</b> Black Cloth  <b>CSW</b> White Cloth  <b>CSR</b> Red Cloth  <b>CSBB</b> Black &amp; Brown Cloth  <b>CSRW</b> Red &amp; White Cloth  <b>CSGW</b> Gold &amp; White Cloth  <b>CSBG</b> Black &amp; Gold Cloth  <b>CSBW</b> Black &amp; White Cloth  <b>CSBP</b> Black &amp; Pink Cloth  <b>CSUW</b> Blue &amp; White Cloth</p> <p><b>NON-CSA LISTED CORD OPTIONS:</b></p> <p><b>CBK</b> Black Cotton  <b>CMG</b> Grey Cotton  <b>CRZ</b> Red Chevron</p>	<p><b>WGG</b> Wire Guard  <b>CGG</b> Standard Cast Guard  <b>TGG</b> Heavy Duty Cast Guard</p> <p style="background-color: #4a5558; color: white; text-align: center;"><b>D - GLASS OPTIONS</b></p> <p><b>CLR</b> Clear Glass'  <b>FST</b> Frosted Glass  <b>RIB</b> Ribbed Glass  <b>CCR</b> Clear Crackle Glass  <b>SMK</b> Smoke Crackle Glass  <b>HCR</b> Honey Crackle Glass</p>	<p><b>E26</b> 100 Watt Max  <b>GU24</b> 24 Bi-Pin, 18W Max  <b>LED16.8</b> 16.8W LED, 1600 Lumen</p> <p style="background-color: #4a5558; color: white; text-align: center;"><b>F - COLOR TEMPERATURE²</b></p> <p><b>NA</b> Not Applicable  <b>2700K</b> 2700K, Warm White  <b>3000K</b> 3000K, Neutral White  <b>3500K</b> 3500K, Bright White  <b>4000K</b> 4000K, Cool White</p>

**IMPORTANT:** (1) Clear glass not recommended if LED16.8 Light Source selected in Section E (2) Option only applicable if LED16.8 Light Source selected in Section E, write NA is alternative light source is selected

**DIMENSIONAL DRAWING**

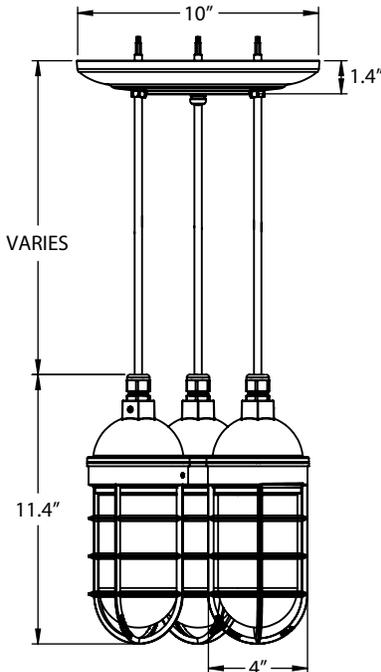

**LIGHT SOURCE**

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact the factory.

OPTION	WATTAGE	LUMENS <small>*Avg. value, actual value dependent on bulb used</small>	CRI	VOLTAGE	DIMMING
<b>INCANDESCENT (MED E26)</b>					
<b>E26</b>	100W Max	1600*	100*	120 VAC	Bulb Dependant
<b>COMPACT FLOURESCENT (GU24 CFL)</b>					
<b>GU24</b>	18W Max	1600*	75*	120 VAC	Bulb Dependant
<b>LED</b>					
<b>LED16.8</b>	16.8W	1600	>90	120 VAC	TRIAC

**SPECIFICATIONS**

**LED SPECIFICATIONS**

LUMEN MAINTENANCE

LED16.8 Source is L90(11K) > 61,000 Hours.

COLOR TEMPERATURES

Standard color temperatures available include 2700K, 3000K, 3500K and 4000K. Custom temperatures available upon request.

CRI

Minimum 90 CRI. Consult factory for other CRI options.

EFFICACY

Delivers over 95 Lumens per watt.

DRIVER & DIMMING OPTION

Reliant on Triac Dimming 16.8W / 120V, dimmable down to 1% depending on dimmer. Requires compatible dimming switch.

**CERTIFICATIONS, LISTINGS & WARRANTY**

MADE IN THE USA

Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR DRY LOCATIONS

LIMITED WARRANTY

For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions

**DESIGN & FINISHES**

CANOPY

Hand-Spun, High Purity 0.050" Thick 3003-O Temper Aluminum Canopy

POWDER COAT FINISHES

Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured on the Canopy