



Order Example: BLE - CN - SCHCL10 - 400 - CN48 - 975 - SBK - NA - PB3 - 400 - NA - E26

A - MOUNTING STYLE

- C** Cord Hung
- CN** Chain Hung¹
- F** Flush Mount¹
- FSF** Semi-Flush Mount
- G** Gooseneck
- S** Stem Mount

B - GLASS STYLE & SIZE

- SCH10** Small, 10" Opaque Glass
- SCH14** Large, 14" Opaque Glass
- SCHCL10** Small, 10" Clear Glass
- SCHCL14** Large, 14" Clear Glass

C - FITTER FINISH

POWDER COAT FINISHES:

- 100** Black
- 105** Textured Black
- 200** White
- 300** Dark Green
- 307** Emerald Green
- 311** Jadite
- 370** Mint
- 380** Chartreuse
- 390** Teal
- 400** Barn Red
- 420** Orange
- 470** Watermelon
- 480** Blush Pink
- 490** Magenta
- 500** Buttery Yellow
- 570** Sunflower
- 600** Bronze
- 601** Chocolate
- 605** Rust
- 615** Oil-Rubbed Bronze
- 700** Royal Blue
- 705** Navy
- 710** Cobalt Blue
- 715** Delphite Blue
- 800** Industrial Grey
- 805** Charcoal Granite
- 810** Graphite
- 975** Galvanized

C - FITTER FINISH (CONTINUED)

- NATURAL FINISHES²:**
- 995** Raw Copper
 - 996** Weathered Copper
 - 997** Raw Brass
 - 998** Weathered Brass
 - 999** Oil-Rubbed Copper

D - MOUNTING

CSA LISTED CORD OPTIONS:

- SBK** Standard Black
- SWH** Standard White
- CSB** Black Cloth
- CSW** White Cloth
- CSR** Red Cloth
- CSBW** Black & White Cloth
- CSRW** Red & White Cloth
- CSBG** Black & Gold Cloth
- CSBP** Black & Pink Cloth
- CSGW** Gold & White Cloth
- CSUW** Blue & White Cloth
- CSBB** Black & Brown Cloth

NON-CSA LISTED CORD OPTIONS:

- CBK** Black Cotton
- CRZ** Red Chevron
- CMG** Grey Cotton
- TBW** Black & White Twist
- TBK** Black Cotton Twist
- TWH** White Cotton Twist
- TRW** Red & White Twist
- TBR** Brown Cotton Twist
- TBB** Brown & Beige Twist
- TRD** Red Cotton Twist
- TPT** Putty Cotton Twist

FLUSH MOUNT OPTIONS:

- F** Flush Mount¹
- FSF** Semi-Flush Mount

STEM MOUNT OPTIONS:

- ST503** .5" Stem Mount, 3"⁴
- ST506** .5" Stem Mount, 6"
- ST512** .5" Stem Mount, 12"
- ST518** .5" Stem Mount, 18"
- ST524** .5" Stem Mount, 24"
- ST536** .5" Stem Mount, 36"
- ST548** .5" Stem Mount, 48"

D - MOUNTING (CONTINUED)

CHAIN MOUNT OPTIONS:

- CN36** 3' of Chain
- CN48** 4' of Chain
- CN60** 5' of Chain
- CN72** 6' of Chain

GOOSENECK OPTIONS:

- G2¹** **G10**
- G4** **G14**
- G6** **G15**
- G7** **G22**
- G9** **G32**

E - MOUNTING FINISH

Please Note: See Section C for all applicable Mounting Finish Options (I) If Cord Hung [C] Mounting Style, selection identifies canopy finish (II) If Flush Mount [F] or Semi-Flush Mount [FSF] Mounting Style, select NA (III) If Stem Mount [S] Mounting Style, select NA. Stem and Canopy Finish will match the Fitter Finish selected in Section C. (IV) If Chain Hung [CN] Mounting Style, selection identifies chain and canopy finish. Natural Finishes not available. (V) If Gooseneck [G] Mounting Style, select NA. Gooseneck and Backplate Finish will match the Fitter Finish selected in Section C.

- NA** Not Applicable

F - CORDS³

- NA** Not Applicable

CSA LISTED CORD OPTIONS:

- SBK** **CSRW**
- SWH** **CSBG**
- CSB** **CSBP**
- CSW** **CSGW**
- CSR** **CSUW**
- CSBW** **CSBB**

NON-CSA LISTED CORD OPTIONS:

- CBK** **CMG**
- CRZ**

G - MOUNTING ACCESSORIES

- NA** None/Not Applicable
- HSC** Hang Straight Canopy⁴
- HDSMC** Heavy Duty Stem Mount Canopy⁴

H - PAINTED BAND

- NA** No Painted Band
- PB1** Single Painted Band
- PB2** Double Painted Band
- PB3** Triple Painted Band

I - PAINTED BAND FINISH

- NA** Not Applicable
- 100** Black
- 200** White⁵
- 307** Emerald Green
- 311** Jadite
- 390** Teal
- 400** Barn Red
- 490** Magenta
- 500** Buttery Yellow
- 600** Bronze
- 700** Royal Blue
- 705** Navy
- 715** Delphite Blue

J - DUSK-TO-DAWN PHOTOCELL⁶

- NA** None/Not Applicable
- DD** Dusk-to-Dawn Photocell


K - LIGHT SOURCE

- E26** 100 Watt Max
- GU24** 18 Watt Max⁷

IMPORTANT: (1) Not available in Natural Finishes (2) Natural Finishes have a longer estimated manufacturing time, please check the website for exact lead time. There are no returns accepted on Natural Finishes. (3) Only applicable if Chain Hung mounting style is selected in Section A and D, select NA if another mounting style is selected (4) Only applicable if Stem Mount mounting style is selected in Section A (5) White Painted Band not recommended if Opaque Glass is selected in Section A, as it blends into opaque glass (6) Only applicable if Gooseneck Mounting Style is selected in Section A (7) Fixtures configured with a GU24 socket are non-returnable


MOUNTING STYLE

CORD HUNG PENDANT (C)

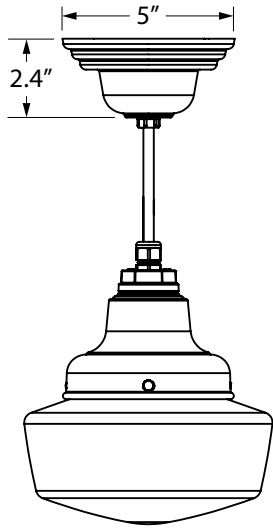


SHOWN WITH: SMALL 10" GLASS


FLUSH MOUNT (F)



SEMI-FLUSH MOUNT (FSF)

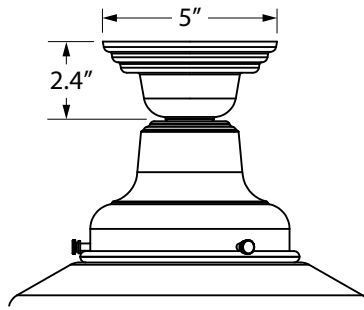


CHAIN HUNG PENDANT (CN)

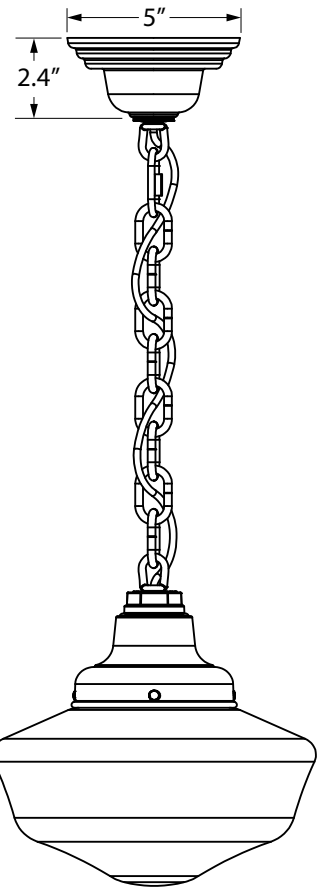


SHOWN WITH: LARGE 14" GLASS

GOOSENECK (G)

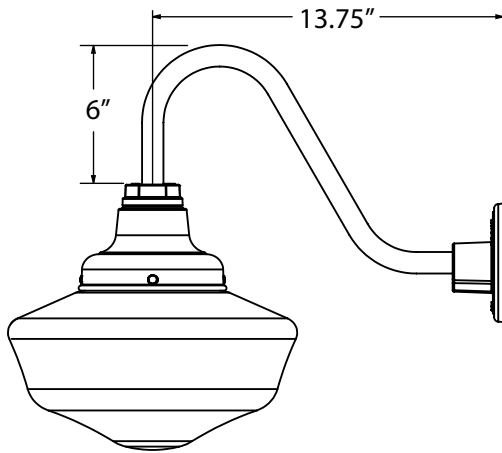

SHOWN WITH:
G26 GOOSENECK ARM
LARGE 14" GLASS


STEM MOUNT PENDANT (S)

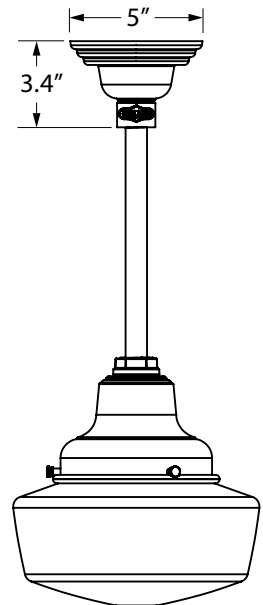


SHOWN WITH: SMALL 10" GLASS

AVAILABLE GLASS SIZES

**SMALL 10" GLASS
(SCHCL10 & SCH10)**

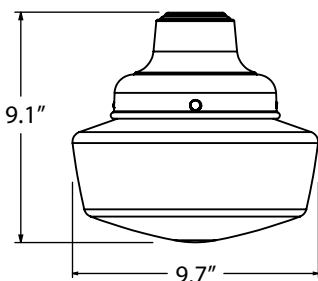

**LARGE 14" GLASS
(SCHCL14 & SCH14)**

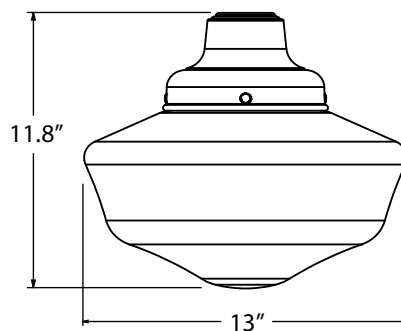

LIGHT SOURCE

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact the factory.

| OPTION | WATTAGE | LUMENS <small>*Avg. value, actual value dependent on bulb used</small> | CRI | VOLTAGE | DIMMING |
|---------------------------------------|----------|---|-----|---------|----------------|
| INCANDESCENT (MED E26) | | | | | |
| E26 | 100W Max | 1400* | 100 | 120 VAC | Bulb Dependant |
| COMPACT FLOURESCENT (GU24 CFL) | | | | | |
| GU24 | 18W Max | 1400* | 75 | 120 VAC | Bulb Dependant |

SPECIFICATIONS

MOUNTING

STEM
1/2" Nominal (0.84" Actual), 6063 Aluminum Mounting Stem. Custom Lengths Available upon Request.

GOOSENECK
1/2" Nominal (0.84" Actual), 6063 Aluminum Gooseneck

CORD
Cord-hung Pendants Include 7' Of Standard Cord Or 5' Of Cotton Cord, +/- For Socket Orientation

FIXTURE & FINISHES

SCHOOLHOUSE FITTER
Hand-Spun from High Purity 0.050" Thick 3003-O Temper Aluminum

POWDER COAT FINISHES
Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA
Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR DAMP LOCATIONS
Includes All Chain, Flush Mount, Semi-Flush Mount, Gooseneck and Stem Mount Styles

CSA LISTED FOR DRY LOCATIONS
Includes Select Cord Hung Mounting Styles

LIMITED WARRANTY
For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions