

BLE -	-	-	-			_	-
_	A	В	С	D	E	F	G
_	Н						
Order Exan	mple: BLE - G - SBS16	- 570 - G32 - 570 - N	A - NA - GU24				

FIXTURE TYPE:

Λ-	IVIO III	ити	C ST	VIE
	III U			

Cord Hung
Chain Hung
Flush Mount
Gooseneck
Stem Mount

B - SHADE SIZE

SINCLAIR:
SBS10
SBS12
SBS14
SBS16

C - SHADE FINISH

<i>PORCEL</i>	<i>AIN FINISHES³:</i>
150	Black

O'CLL'	LIVITATION LO .
150	Black
250	White
350	Vintage Green
355	Jadite
455	Cherry Red
550	Yellow
650	Bronze
750	Cobalt Blue
765	Delphite Blue
850	Graphite
950	Metallic Chrome
POWDER	COAT FINISHES4.

POWDER	COAT FINISHES⁴
100	Black
105	Textured Black
200	White
300	Dark Green
307	Emerald Green
311	Jadite
370	Mint
380	Chartreuse
390	Teal
400	Barn Red
420	Orange
470	Watermelon
480	Blush Pink
490	Magenta
495	Sherbet Orange
500	Buttery Yellow
570	Sunflower
600	Bronze
601	Chocolate
605	Rust
615	Oil-Rubbed Bronze
700	Royal Blue

C - SHADE FINISH (CONTINUED)

POWDER	COAT FINISHES⁴:		
705	Navy		
710	Cobalt Blue		
715	Delphite Blue		
790	Lavender		
800	Industrial Grey		
805	Charcoal Granite		
810	Graphite		
975	Galvanized		
NATURAL METALS ² :			
995	Raw Copper		
996	Weathered Copper		
997	Raw Brass		
998	Weathered Brass		
999	Oil-Rubbed Copper		

D - MOUNTING

CSA LISTED CORD OPTIONS:

SBK	Standard Black
SWH	Standard White
CMG	Grey Cotton
CRZ	Red Chevron
CSB	Black Cloth
CSW	White Cloth
CSR	Red Cloth
CSBB	Black & Brown Cloth
CSRW	Red & White Cloth
CSGW	Gold & White Cloth
CSBG	Black & Gold Cloth
CSBW	Black & White Cloth
CSBP	Black & Pink Cloth
CSUW	Blue & White Cloth

NON-CSA LISTED CORD **OPTIONS:**

1 110110	!
CBK	Black Cotton
TBK	Black Cotton Twist
TWH	White Cotton Twist
TBR	Brown Cotton Twist
TRD	Red Cotton Twist
TPT	Putty Cotton Twist
TBW	Black & White Twist
TRW	Red & White Twist
TBB	Brown & Beige Twist

CHAIN MOUNT OPTIONS:

I IMILIA IN	CONT OF HONS.
CN36	3' of Chain1
CN48	4' of Chain ¹
CN60	5' of Chain ¹
CN72	6' of Chain1

D - MOUNTING (CONTINUED)

FLUSH M	OUNT OPTIONS:
FM ¹	
GOOSENI G1 ¹	ECK OPTIONS: G16 ¹

G1 ¹	G16 ¹
G2 ¹	G17
G3 ¹	G191
G4	G22
G5 ¹	G24
G6	G25
G7	G26 ¹
G8	G32
G9	G341
G10	G351
G11 ¹	G36 ¹
G121	G401
G13	G641
G14	G651
G15	

STEM MOUNT OPTIONS:

TETTTOON OF TIONS.		
ST506	.5" Stem Mount, 6"1	
ST512	.5" Stem Mount, 12"1	
ST518	.5" Stem Mount, 18"1	
ST524	.5" Stem Mount, 24"1	
ST536	.5" Stem Mount, 36"1	
ST548	.5" Stem Mount, 48"1	
ST706	.75" Stem Mount, 6"	
ST712	.75" Stem Mount, 12"	
ST718	.75" Stem Mount, 18"	
ST724	.75" Stem Mount, 24"	
ST736	.75" Stem Mount, 36"	
ST748	.75" Stem Mount, 48"	

E - MOUNTING FINISH

Please Note: See $\bf Section \ C$ for Finish Options. 980-Brushed Aluminum is also available for Gooseneck and Stem mounting styles. If Porcelain Finish is selected, mounting will be powder coat painted-to-match. (I) If Cord Hung [C] or Flush Mount [F]

Mounting Style, selection identifies canopy finish (II) If Chain Hung [CN] Mounting Style, selection identifies chain and canopy finish (III) If Stem Mount [S] Mounting Style, selection identifies stem and canopy finish

980 **Brushed Aluminum**

F - CORDS⁵

Please Note: See **Section D** for all applicable CSA and Non-CSA Listed Cord Options for Chain Hung Mounting Style

Not Applicable

G - MOUNTING ACCESSORY

NA	None/Not Applicable
HSC	Hang Straight Canopy ^{1,6}
HDSMC	Heavy Duty Stem Mount
	Canopy ^{1,6}
HDBP	Heavy Duty Backing Plate ¹
DD	Dusk-to-Dawn Photocell
DBPC	Decorative Backing Plate
	Cover
DCHX	Decorative Backing Plate
	Cover & Hex Cover


H - LIGHT SOURCE


E26	200 Watt Max
GU24	23 Watt Max

IMPORTANT: (1) Not available in Natural Metals (2) Natural Metals have a longer estimated manufacturing time, please check the website for exact lead time. There are no returns accepted on Natural Metals (3) All Porcelain Enamel finished shades feature a white interior and a black outer rim (4) All Powder Coat finished shades, Galvanized excluded, feature a white interior (5) Only applicable if Chain Hung Mounting Style selected in Section A, select NA if another Mounting Style is selected (6) Only applicable if Stem Mounting Style is selected in Section A


MOUNTING STYLE

CHAIN HUNG PENDANT (CN)




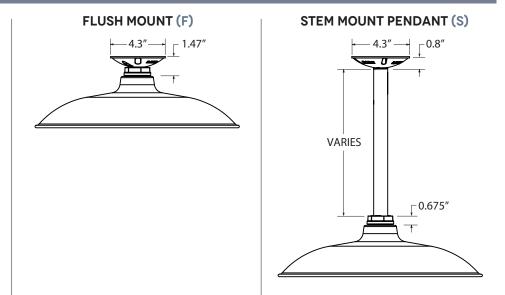

CORD HUNG PENDANT (C)

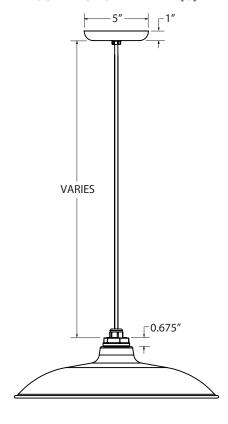


GOOSENECK (G)



SHOWN WITH: G13 GOOSENECK ARM

LUMINAIRE DIMENSIONS



SHADE CODE	HEIGHT (A)	DIAMETER (B)
SBS10	3.25"	10"
SBS12	3.25"	12"
SBS14	3.50"	14"
SBS16	3.75″	16"

BARN LIGHT ELECTRIC CO. SINCLAIR SERIES SPS-0155 REV A

SPECIFICATIONS

MOUNTING

STFM

1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Mounting Stem. Custom Lengths Available upon Request.

GOOSENECK

1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Gooseneck

CORD

Cord-Hung Pendants Include 7' of Standard Cord or 5' of Cotton or Cloth Cord, +/- For Socket Orientation

CHAIN

4-Gauge Chain Complete with Quick Link for On-Site Adjustments to Chain's Length

MAX FIXTURE WEIGHT

10 lbs

LIGHT SOURCE

INCANDESCENT

Medium Base E26 Socket, 120 VAC

COMPACT FLUORESCENT

Bi-Pin Base GU24 Socket, 120 VAC

LED

Sinclair Series Also Available in LED. Please Visit Website for LED Specifications.

MATERIAL & FINISHES

POWDER COAT SHADE

Hand-Spun from High Purity 0.050" Thick 3003-O Temper Aluminum

PORCELAIN SHADE

Hand-Spun from 20 Gauge Sheet Metal

POWDER COAT FINISHES

Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured

PORCELAIN FINISHES

Applied by Hand and Fired in a High Temperature Oven

COPPER

Hand-Spun from High Purity .032 Thick C11000-O60 ETP Copper

Hand-Spun from High Purity .050" Thick C2600-O60 Brass

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA

Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS

Includes All Gooseneck, Stem and Flush Mounting Styles

CSA LISTED FOR DAMP LOCATIONS

Includes All Chain and Select Cord Hung Mounting Styles

ULLISTED FOR DAMP LOCATIONS

Includes All Gooseneck, Stem, Chain and Select Cord Hung Mounting Styles with Acrylic Diffuser Option

LIMITED WARRANTY

For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions

UL CERTIFICATION

UL Listed Fixtures Available upon Request. Please Consult Factory for Additional Information.