



BARN LIGHT ELECTRIC COMPANY®

INSTALLATION INSTRUCTIONS STEM MOUNT PENDANT WITH HANG STRAIGHT CANOPY

Thank you for purchasing from Barn Light Electric, America's leading manufacturer of hand-crafted shades and exclusive source for porcelain enamel lighting! For questions or concerns about your purchase, please contact us!

INS-0005 REV L (HWK-0001)

IMPORTANT

Read all instructions before assembly. Installation is to be done by a qualified professional. **For wet locations, junction between the mounting surface and luminaire must be sealed with caulking.**


CAUTION: Risk of fire, this product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

INSTRUCTIONS


1. Disconnect power at the electrical panel before installation.
2. If adapter bracket (A) is necessary, mount to junction box (B) using two mounting screws (C). **NOTE: Mounting screws (C) not included.**
3. Place socket gasket (D) onto socket (E). Feed socket wires through shade (F), coupler o-ring (G) and coupler (H).
4. Insert socket (E) into the shade (F) and screw on coupler (H), rotate coupler counter-clockwise. **NOTE: Ensure o-ring (G) is seated in coupler (H) groove.**
5. Feed wires from shade (F) through stem (I).
6. Thread stem (I) into shade (F). Use threaded joint compound or Teflon tape.
7. Screw stem (I) into canopy (J) until tight and firmly tighten set screw (K).
8. Use wire nuts (L) to connect power supply to the black wire and neutral wire to white wire. **NOTE: Wire nuts (L) not included.**
9. Attach ground wire (M) to the junction box (B), green wire, or bare wire.
10. Secure hang straight canopy (J) to the junction box (B) with two mounting screws (N).

ALTERNATE FIXTURES

Although the illustration below includes an RLM shade, these alternative fixtures follow the same installation instructions.

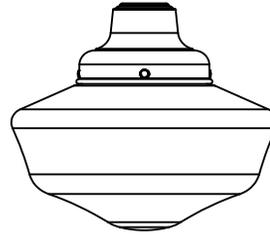


Schoolhouse Fixture




Guard & Glass Fixture

WIRING DIAGRAM

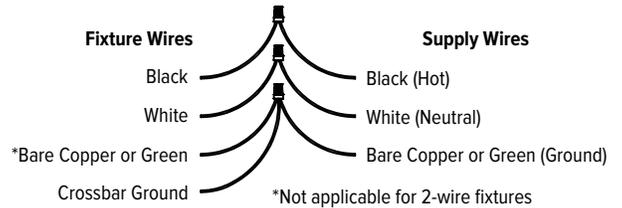

STEM MOUNT PENDANT WITH HANG STRAIGHT CANOPY

- A. Adapter Bracket (Optional)
- B. Junction Box
- C. Mounting Screw
- D. Socket Gasket
- E. Socket
- F. Shade (Varies)
- G. Coupler O-Ring
- H. Coupler
- I. Stem (Length Varies)
- J. Hang Straight Canopy
- K. Set Screw
- L. Wire Nuts*
- M. Ground Wire
- N. Mounting Screws*

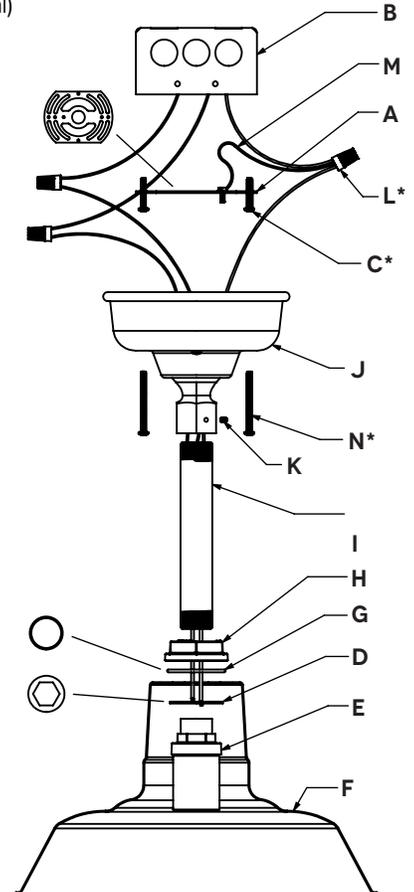

***IMPORTANT:** Mounting screws and wire nuts not included in hardware kit. Standard screw sizes include: 6-32, 8-32, 10-24 and 10-32.